

THREE PHASE DIODE+THYRISTOR

DFA200AA80/160

UL;E76102(M)

SanRex Power Module, **DFA200AA**, is complex isolated module which is designed for rash current circuit.

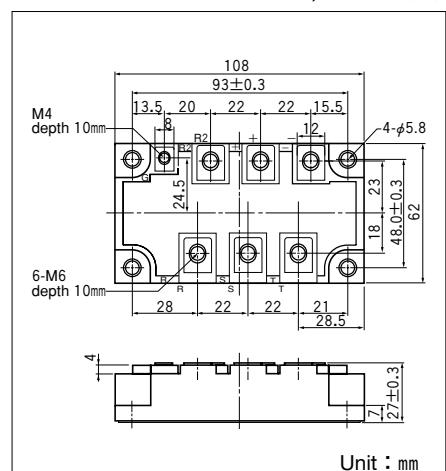

It contains six diodes connected in a three phase bridge configuration, and a thyristor connected to a direct current line.

- This Module is designed very compactly. Because diode module and thyristor put together.

- This Module is also isolated type between electorode terminal and mounting base. So you can put this Module and other one together in a same fin.

(Application)

- Inverter for AC or DC motor control, Current stabilized power supply, Switching power supply.



● DIODE

■ Maximum Ratings

($T_j=25^\circ\text{C}$ unless otherwise specified)

Symbol	Item	Ratings		Unit
		DFA200AA80	DFA200AA160	
V_{RRM}	Repetitive Peak Reverse Voltage	800	1600	V
V_{RSM}	Non-Repetitive Peak Reverse Voltage	960	1700	V

Symbol	Item	Conditions	Ratings	Unit
I_D	Output Current (D.C.)	Three phase full wave, $T_c=96^\circ\text{C}$	200	A
I_{FSM}	Surge forward current	1 cycle, 50/60Hz, peak value, non-repetitive	1850/2000	kA
T_j	Operating Junction Temperature		-30 to +150	°C
T_{stg}	Storage Temperature		-30 to +135	°C
V_{iso}	Isolation Breakdown Voltage (R.M.S.)	A.C. 1 minute	2500	V
Mounting Torque	Mounting (M5)	Recommended Value 1.5-2.5 (15-25)	2.7 (28)	N·m (kgf·cm)
	Terminal (M6)	Recommended Value 2.5-3.9 (25-40)	4.7 (48)	
	Terminal (M4)	Recommended Value 1.0-1.4 (10-14)	1.5 (15)	
Mass	Typical Value		460	g

■ Electrical Characteristics

Symbol	Item	Conditions	Ratings	Unit
I_{RRM}	Repetitive Peak Reverse Current,max.	$T_j=150^\circ\text{C}$, $V_R=V_{RRM}$	20	mA
V_{FM}	Forward Voltage Drop,max.	$I_F=200\text{A}$ Inst. measurement	1.35	V
$R_{th(j-c)}$	Thermal Impedance, max.	Junction to Case (TOTAL)	0.10	°C/W

● THYRISTOR

■ Maximum Ratings



(T_j=25°C unless otherwise specified)








Symbol	Item	Ratings		Unit
		DFA200AA80	DFA200AA160	
V _{RRM}	Repetitive Peak Reverse Voltage	800	1600	V
V _{RSM}	Non-Repetitive Peak Reverse Voltage	960	1700	V
V _{DRM}	Repetitive Peak Off-State Voltage	800	1600	V

Symbol	Item	Conditions	Ratings	Unit
I _{T(AV)}	Average On-State Current	Singl phase half wave. 180° conduction, T _c =93°C	200	A
I _{TSM}	Surge On-State Current	½cycle, 50/60Hz, peak value, non-repetitive	1850/2000	A
I ² t	I ² t (for fusing)	Value for one of surge current	17000	A ² s
di/dt	Critical Rate of Rise of On-State Current	I _G =100mA, V _D =½V _{DRM} , di/dt=0.1A/μs	200	A/μs
V _{iso}	Isolation Breakdown Voltage (R.M.S.)	A.C. 1minute	2500	V
T _j	Operating Junction Temperature	T _j =125°C ~ 135°C	-30 to +135	°C
T _{stg}	Storage Temperature		-30 to +135	°C
Mounting Torque	Mounting (M5)	Recommended Value 1.5-2.5 (15-25)	2.7 (28)	N·m (kgf·cm)
	Terminal (M6)	Recommended Value 2.5-3.9 (15-25)	4.7 (48)	
	Terminal (M4)	Recommended Value 1.0-1.4 (15-25)	1.5 (15)	
Mass	Typical Value		460	g

■ Electrical Characteristics

Symbol	Item	Conditions	Ratings	Unit
I _{DRM}	Repetitive Peak off-State Current,max.	T _j =135°C, V _D =V _{DRM}	50	mA
I _{RRM}	Repetitive Peak Reverse Current,max.	T _j =135°C, V _D =V _{DRM}	50	mA
V _{TM}	Peak on-State Voltagea,max.	I _T =200A Inst. measurement	1.15	V
I _{GT}	Gate Trigger Current,max.	V _D =6V, I _T =1A	100	mA
V _{GT}	Gate Trigger Voltage,max.	V _D =6V, I _T =1A	3	V
dv/dt	Critical Rate of off-State Voltagget,min.	T _j =125°C, V _D =²/₃V _{DRM}	500	V/μs
R _{th(j-c)}	Thermal Impedance, max.	Junction to Case	0.18	°C/W

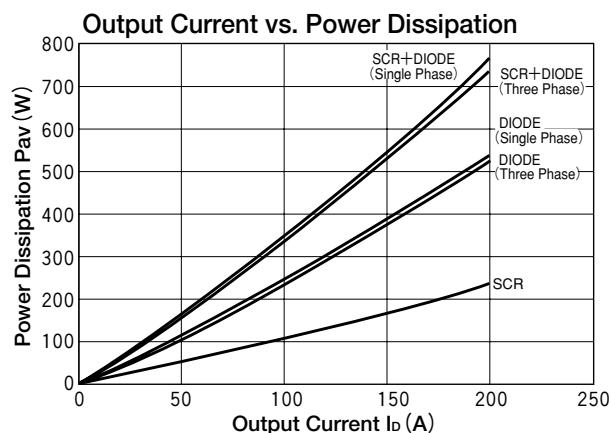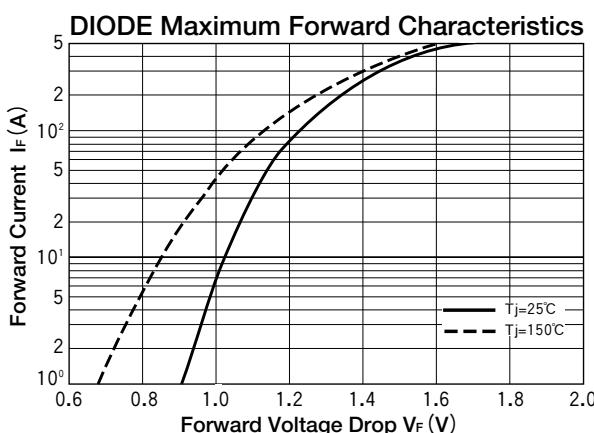

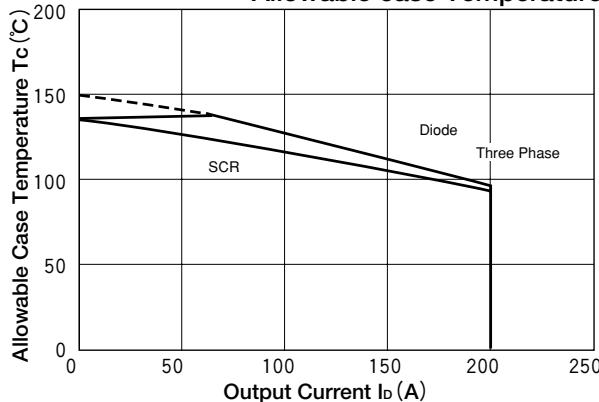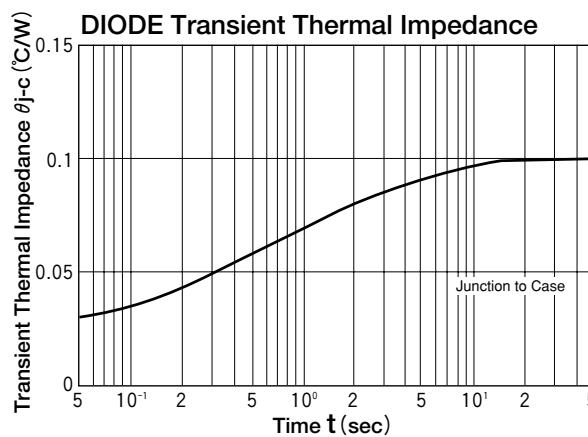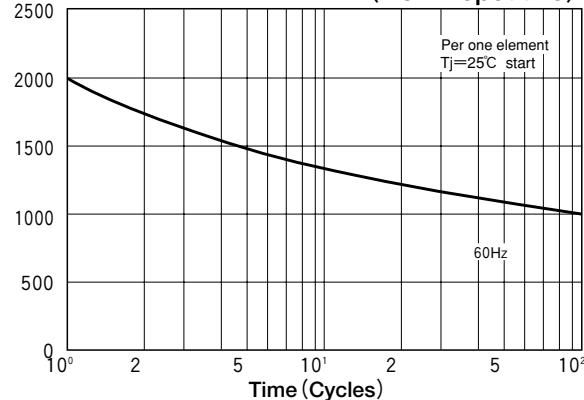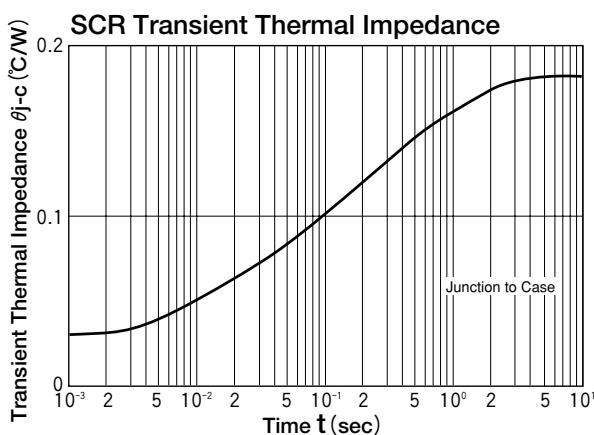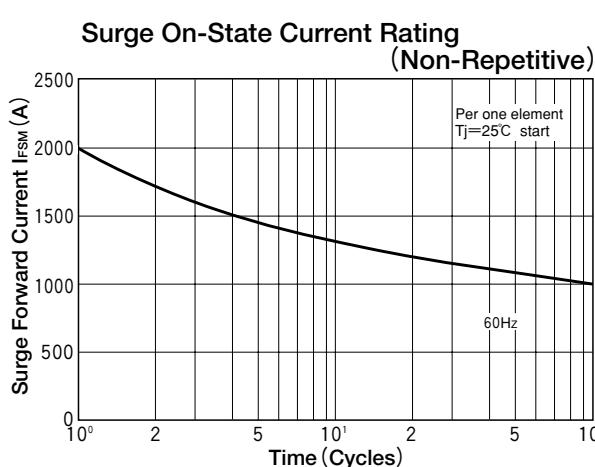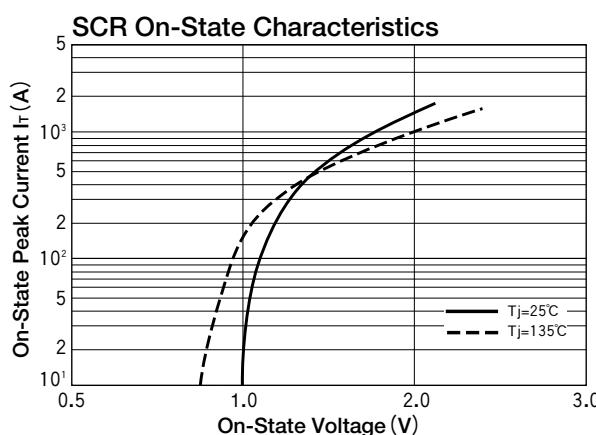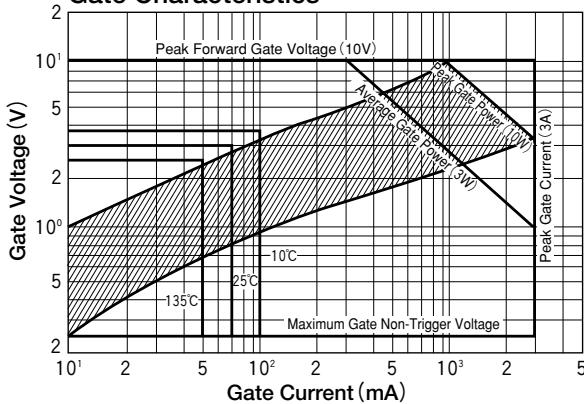**Output Current vs.
Allowable case Temperature**

**DIODE Surge Forward Current Rating
(Non-Repetitive)**

Gate Characteristics


X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Discrete Semiconductor Modules category:

Click to view products by Sanrex manufacturer:

Other Similar products are found below :

[M252511FV](#) [DD260N12K-A](#) [DD380N16A](#) [DD89N1600K-A](#) [APT2X21DC60J](#) [APT58M80J](#) [B522F-2-YEC](#) [MSTC90-16](#) [25.163.0653.1](#)
[25.163.2453.0](#) [25.163.4253.0](#) [25.190.2053.0](#) [25.194.3453.0](#) [25.320.4853.1](#) [25.320.5253.1](#) [25.326.3253.1](#) [25.326.3553.1](#) [25.330.1653.1](#)
[25.330.4753.1](#) [25.330.5253.1](#) [25.334.3253.1](#) [25.334.3353.1](#) [25.350.2053.0](#) [25.352.4753.1](#) [25.522.3253.0](#) [T483C](#) [T484C](#) [T485F](#) [T485H](#)
[T512F-YEB](#) [T513F](#) [T514F](#) [T554](#) [T612FSE](#) [25.161.3453.0](#) [25.179.2253.0](#) [25.194.3253.0](#) [25.325.1253.1](#) [25.326.4253.1](#) [25.330.0953.1](#)
[25.332.4353.1](#) [25.350.1653.0](#) [25.350.2453.0](#) [25.352.1453.0](#) [25.352.1653.0](#) [25.352.2453.0](#) [25.352.5453.1](#) [25.522.3353.0](#) [25.602.4053.0](#)
[25.640.5053.0](#)