

THYRISTOR / DIODE (ISOLATED TYPE)

PK(PD)160FG40/80/120/160

$I_{T(AV)} = 160A$, $V_{RRM} = 400 - 1600V$



SanRex Thyristor/Thyristor modules (**PK series**), Thyristor/Diode modules (**PD series**) are designed for general purpose high voltage applications such as motor controls, temperature controls, lighting controls and UPS.

Features

- * Glass-passivated junctions Features
- * High Surge Current
- * Low loss ($V_{TM}=1.5V$)

Typical Applications

- * Motor Controls
- * Temperature Controls
- * Lighting Controls

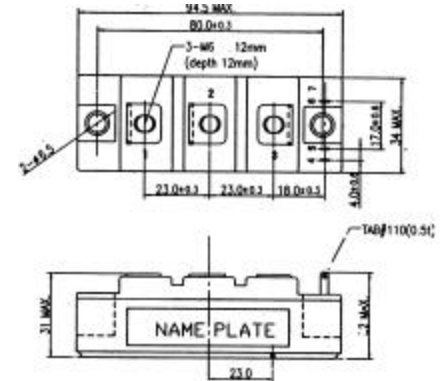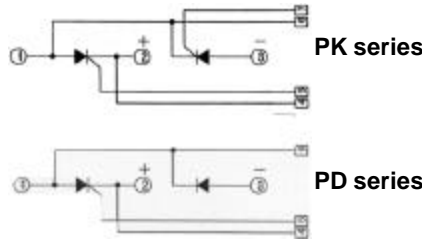

< Maximum Ratings >

($T_j = 25^\circ C$ unless otherwise noted)

Symbol	Item	Ratings				Unit
		PK160FG40	PK160FG80	PK160FG120	PK160FG160	
V_{RRM}	Repetitive Peak Reverse Voltage	400	800	1200	1600	V
V_{RSM}	Non-Repetitive Peak Reverse Voltage	480	960	1300	1700	V
V_{DRM}	Repetitive Peak Off-state Voltage	400	800	1200	1600	V
$I_{T(AV)}$	Average On-state Current	$T_C = 84^\circ C$			160	A
$I_{T(RMS)}$	R.M.S. On-state Current	$T_C = 84^\circ C$			251	A
I_{TSM}	Surge On-state Current	1/2 cycle, 50Hz/60Hz, Peak value, Non-repetitive			5000/5400	A
$I^2 t$	$I^2 t$ (for fusing)	Value for one cycle surge current			125000	$A^2 s$
P_{GM}	Peak Gate Power Dissipation				10	W
$P_{G(AV)}$	Average Gate Power Dissipation				3	W
I_{FGM}	Peak Gate Current				3	A
V_{FGM}	Peak Gate Voltage (Forward)				10	V
V_{RGM}	Peak Gate Voltage (Reverse)				5	V
di/dt	Critical Rate of Rise of On-state Current	$I_G=100mA$, $V_D=1/2V_{DRM}$, dig/dt=0.1A/Fs			200	A/Fs
V_{ISO}	Isolation Breakdown Voltage	A.C. 1 minute			2500	
T_j	Operating Junction Temperature				-40 to +125	$^\circ C$
T_{stg}	Storage Temperature				-40 to +125	$^\circ C$
	Mounting Torque	Mounting M6	Recommended Value 2.5 to 3.9		4.7	N*m
		Terminals M6	Recommended Value 2.5 to 3.9		4.7	
	Mass	Typical Value			210	g

< Electrical Characteristics >

($T_j = 25^\circ C$ unless otherwise noted)

Symbol	Item	Conditions	Ratings			Unit
			Min.	Typ.	Max.	
I_{DRM}	Repetitive Peak Off-state Current	$T_j = 125^\circ C$, $V_D = V_{DRM}$			35	mA
I_{RRM}	Repetitive Peak Reverse Current	$T_j = 125^\circ C$, $V_R = V_{RRM}$			35	mA
V_{TM}	Peak On-State Voltage	$I_T = 480A$			1.5	V
I_{GT}	Gate Trigger Current	$V_D=6V$, $I_T=1A$			100	mA
V_{GT}	Gate Trigger Voltage	$V_D=6V$, $I_T=1A$			3	V
V_{GD}	Non-Trigger Gate Voltage	$T_j = 125^\circ C$, $V_D=1/2V_{DRM}$	0.25			V
dv/dt	Critical Rate of Rise of Off-state Voltage	$T_j = 125^\circ C$, $V_D=2/3V_{DRM}$	500			V/Fs
Rth(j-c)	Thermal Resistance	Junction to case			0.18	$^\circ C/W$

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Discrete Semiconductor Modules](#) category:

Click to view products by [Sanrex](#) manufacturer:

Other Similar products are found below :

[M254045V](#) [M254085](#) [DD380N16A](#) [DDB6U145N16L](#) [DR7306](#) [DZ540N26K](#) [EFG15D](#) [B484-2](#) [B485A-2](#) [B522F-2-YEC](#) [25.320.4853.1](#)
[25.320.5253.1](#) [25.334.3253.1](#) [25.334.3353.1](#) [25.350.2053.0](#) [25.352.4753.1](#) [25.522.3253.0](#) [T2180N18TOF](#) [VT](#) [T484C](#) [T485F](#) [T485H](#) [T514F](#)
[T554](#) [T582](#) [25.332.4353.1](#) [25.350.1653.0](#) [25.352.1453.0](#) [25.352.1653.0](#) [25.352.2453.0](#) [25.352.5453.1](#) [25.522.3353.0](#) [25.640.5053.0](#)
[M252532V](#) [M252555](#) [M2550TB400](#) [M471B5673EH1-CH900](#) [M505012F-YEC](#) [TD330N16AOF](#) [B512-2T-YDA](#) [TT215N22KOF](#)
[TT251N16KOF](#) [V100-35.200N](#) [V72-26.150M](#) [DD700N22K](#) [DD89N16K](#) [DD98N22K](#) [MSD30-12](#) [MSKD120-16](#) [TD500N16KOF](#)
[TT425N18KOF](#)