

**DC Fan****92×92×25 mm****San Ace 92 9GA** type Low Power Consumption Fan **General Specifications**

- Material ..... Frame: Plastic (Flammability: UL 94V-0), Impeller: Plastic (Flammability: UL 94V-0)
- Expected life ..... See the table below. (L10 life: 90% survival rate for continuous operation in free air at 60°C, rated voltage)  
Expected life at 40°C is for reference only.
- Motor protection function ..... Locked rotor burnout protection, Reverse polarity protection  
For details, please refer to p. 573.
- Dielectric strength ..... 50/60 Hz, 500 VAC, for 1 minute (between lead wire conductors and frame)
- Insulation resistance ..... 10 MΩ or more with a 500 VDC megger (between lead wire conductors and frame)
- Sound pressure level (SPL) ..... At 1 m away from the air inlet
- Storage temperature ..... -30 to +70°C (Non-condensing)
- Lead wire ..... Red Black Sensor Yellow Control Brown  
(For models without PWM control function, there is no speed control wiring.)
- Mass ..... 125 g

**Specifications**

The models listed below **have ribs and pulse sensors with PWM control function**. For models without ribs, append "1" to the end of model numbers.

| Model no.           | Rated voltage [V] | Operating voltage range [V] | PWM duty cycle [%] | Rated current [A] | Rated input [W] | Rated speed [min⁻¹] | Max. airflow [m³/min] [CFM] | Max. static pressure [Pa] [inchH₂O] | SPL [dB (A)] | Operating temperature [°C] | Expected life [h]       |  |  |
|---------------------|-------------------|-----------------------------|--------------------|-------------------|-----------------|---------------------|-----------------------------|-------------------------------------|--------------|----------------------------|-------------------------|--|--|
| <b>9GA0912P4J03</b> | 12                | 10.2 to 13.8                | 100                | 0.39              | 4.68            | 5000                | 2.2 77.7                    | 105 0.42                            | 43           | -20 to +70                 | 60000/60°C (90000/40°C) |  |  |
|                     |                   |                             | 0                  | 0.06              | 0.72            | 1500                | 0.65 23.3                   | 9.4 0.04                            | 14           |                            |                         |  |  |
| <b>9GA0912P4G03</b> |                   | 20.4 to 27.6                | 100                | 0.28              | 3.36            | 4400                | 1.93 68.2                   | 81 0.33                             | 39           |                            |                         |  |  |
|                     |                   |                             | 0                  | 0.06              | 0.72            | 1500                | 0.65 23.3                   | 9.4 0.04                            | 14           |                            |                         |  |  |
| <b>9GA0912P4S03</b> |                   | 20.4 to 27.6                | 100                | 0.2               | 2.4             | 3800                | 1.67 59.0                   | 60.6 0.24                           | 35           |                            |                         |  |  |
|                     |                   |                             | 0                  | 0.06              | 0.72            | 1500                | 0.65 23.3                   | 9.4 0.04                            | 14           |                            |                         |  |  |
| <b>9GA0924P4J03</b> |                   | 24                          | 100                | 0.2               | 4.8             | 5000                | 2.2 77.7                    | 105 0.42                            | 43           |                            |                         |  |  |
|                     |                   |                             | 0                  | 0.04              | 0.96            | 1500                | 0.65 23.3                   | 9.4 0.04                            | 14           |                            |                         |  |  |
| <b>9GA0924P4G03</b> |                   | 20.4 to 27.6                | 100                | 0.15              | 3.6             | 4400                | 1.93 68.2                   | 81 0.33                             | 39           |                            |                         |  |  |
|                     |                   |                             | 0                  | 0.04              | 0.96            | 1500                | 0.65 23.3                   | 9.4 0.04                            | 14           |                            |                         |  |  |
| <b>9GA0924P4S03</b> |                   |                             | 100                | 0.12              | 2.88            | 3800                | 1.67 59.0                   | 60.6 0.24                           | 35           |                            |                         |  |  |
|                     |                   |                             | 0                  | 0.04              | 0.96            | 1500                | 0.65 23.3                   | 9.4 0.04                            | 14           |                            |                         |  |  |

\* PWM input frequency is 25 kHz; models without specifications at 0% PWM duty cycle have zero fan speed at 0%.

The following sensor and control options are available for selection.

Available for all models.

Differs according to the model. Refer to the table on pp. 604 to 605.

The models listed below **have ribs and pulse sensors**. For models without ribs, append "1" to the end of model numbers.

| Model no.          | Rated voltage [V] | Operating voltage range [V] | Rated current [A] | Rated input [W] | Rated speed [min⁻¹] | Max. airflow [m³/min] [CFM] | Max. static pressure [Pa] [inchH₂O] | SPL [dB (A)] | Operating temperature [°C] | Expected life [h]       |
|--------------------|-------------------|-----------------------------|-------------------|-----------------|---------------------|-----------------------------|-------------------------------------|--------------|----------------------------|-------------------------|
| <b>9GA0912H401</b> | 12                | 10.2 to 13.8                | 0.19              | 2.28            | 3300                | 1.45 51.2                   | 45.6 0.18                           | 31           | -20 to +70                 | 60000/60°C (90000/40°C) |
|                    |                   | 7 to 16                     | 0.19              | 2.28            | 3300                | 1.45 51.2                   | 45.6 0.18                           | 31           |                            |                         |
|                    |                   |                             | 0.14              | 1.68            | 2800                | 1.23 43.5                   | 32.9 0.13                           | 28           |                            |                         |
|                    |                   | 10.2 to 13.8                | 0.11              | 1.32            | 2400                | 1.05 37.1                   | 24 0.096                            | 24           |                            |                         |
|                    |                   |                             | 0.09              | 1.08            | 2000                | 0.87 30.7                   | 16.7 0.067                          | 21           |                            |                         |
| <b>9GA0924H401</b> | 24                | 20.4 to 27.6                | 0.09              | 2.16            | 3300                | 1.45 51.2                   | 45.6 0.18                           | 31           |                            |                         |
|                    |                   | 12 to 28.8                  | 0.09              | 2.16            | 3300                | 1.45 51.2                   | 45.6 0.18                           | 31           |                            |                         |
|                    |                   | 16 to 27.6                  | 0.08              | 1.92            | 2800                | 1.23 43.5                   | 32.9 0.13                           | 28           |                            |                         |
|                    |                   | 14 to 27.6                  | 0.05              | 1.2             | 2400                | 1.05 37.1                   | 24 0.096                            | 24           |                            |                         |
|                    |                   |                             | 0.03              | 0.72            | 2000                | 0.87 30.7                   | 16.7 0.067                          | 21           |                            |                         |

The following sensor and control options are available for selection.


Available for all models.

The mark indicates Short Lead Time Service applicable models. See p. 626 for details.


## Airflow - Static Pressure Characteristics / PWM Duty - Speed Characteristics Example

**9GA0912P4J03** With pulse sensor with PWM control function


### PWM duty cycle

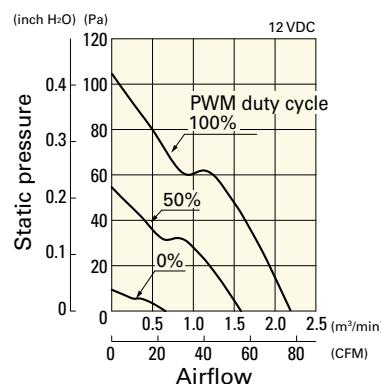

### Operating voltage range

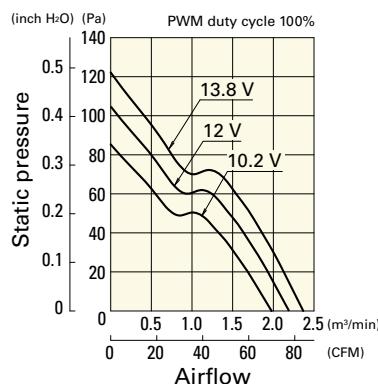


### PWM duty - Speed characteristics example

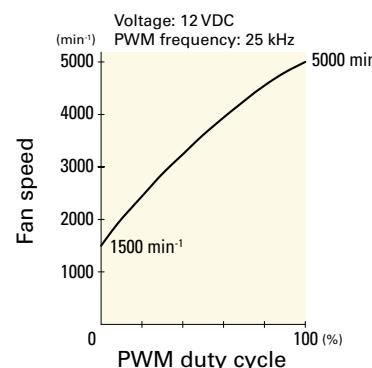


DC Fan 92 mm sq.

**9GA0912P4G03** With pulse sensor with PWM control function


### PWM duty cycle

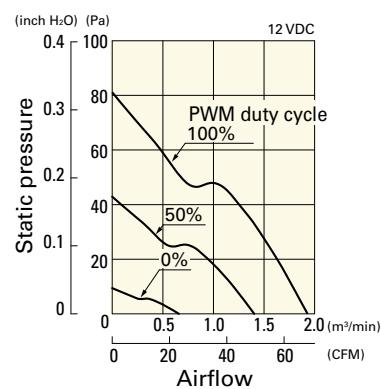

### Operating voltage range

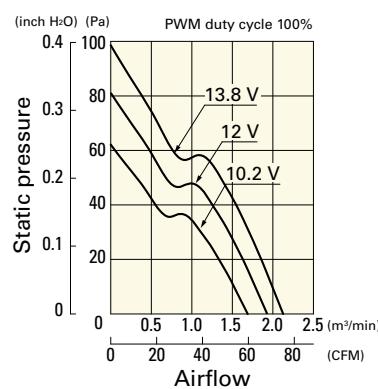


### PWM duty - Speed characteristics example

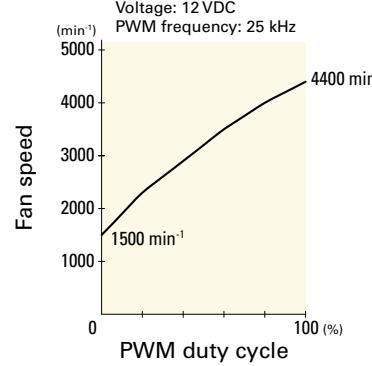


**9GA0912P4S03** With pulse sensor with PWM control function


### PWM duty cycle

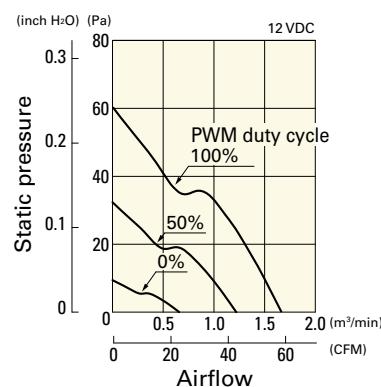

### Operating voltage range

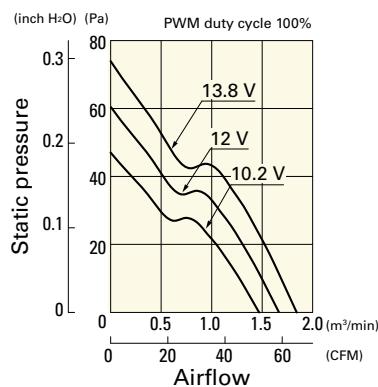


### PWM duty - Speed characteristics example

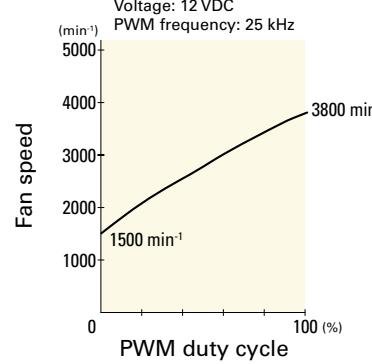


**9GA0924P4J03** With pulse sensor with PWM control function


### PWM duty cycle

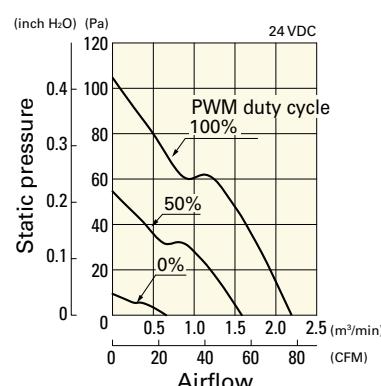

### Operating voltage range

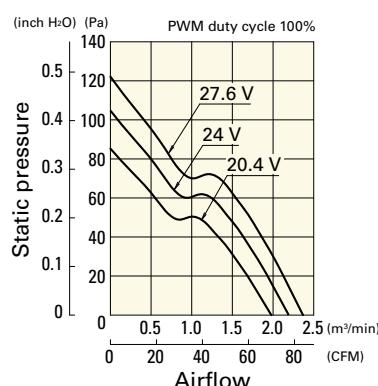


### PWM duty - Speed characteristics example

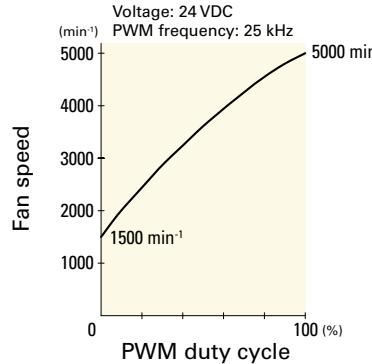


**Airflow - Static Pressure Characteristics / PWM Duty - Speed Characteristics Example**

9GA0924P4G03 With pulse sensor with PWM control function


PWM duty cycle

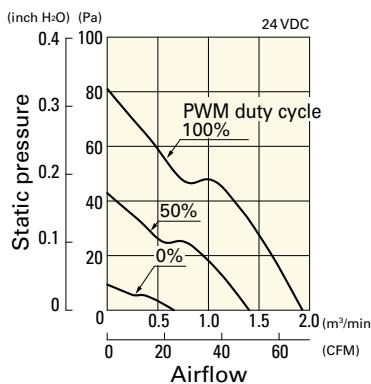

Operating voltage range

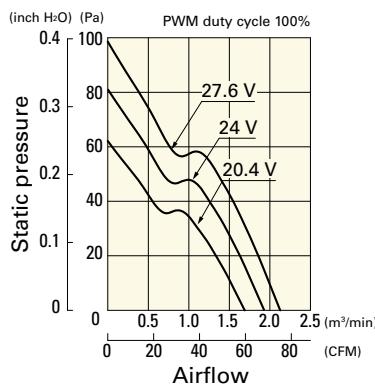


PWM duty - Speed characteristics example

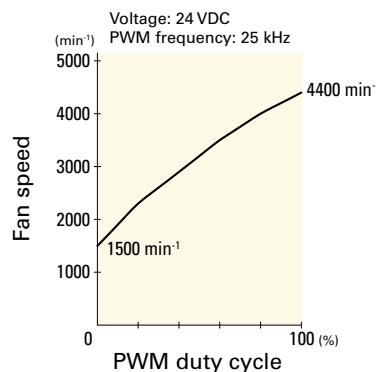


9GA0924P4S03 With pulse sensor with PWM control function


PWM duty cycle

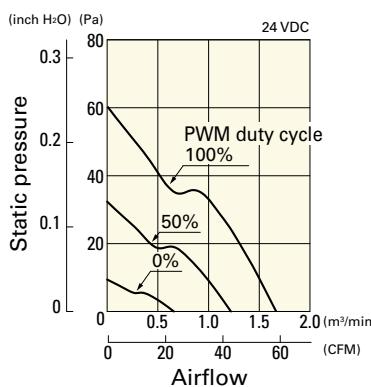

Operating voltage range

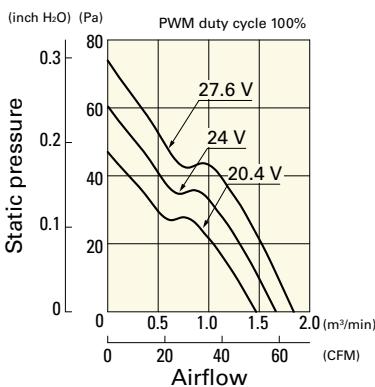


PWM duty - Speed characteristics example

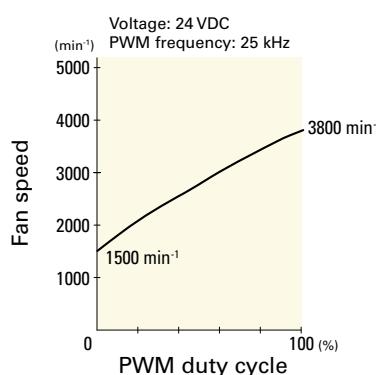**Airflow - Static Pressure Characteristics**


9GA0912H401 With pulse sensor

Operating voltage range

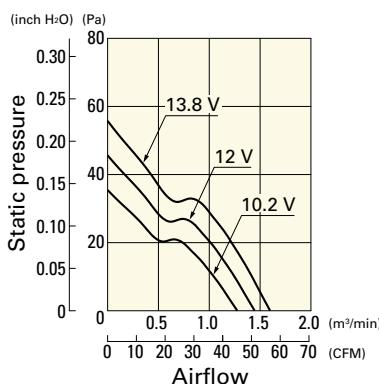


9GA0912W401 With pulse sensor

Operating voltage range

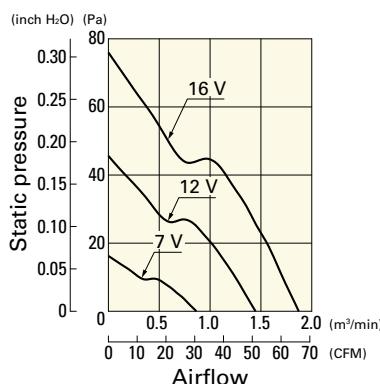

9GA0912F401 With pulse sensor


Operating voltage range

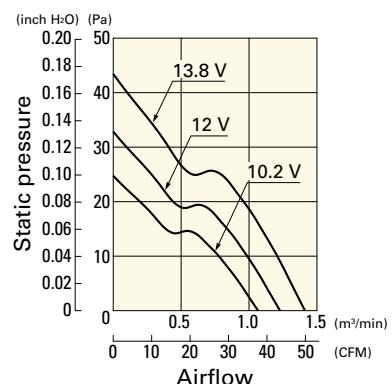

## Airflow - Static Pressure Characteristics


9GA0912M401 With pulse sensor

Operating voltage range

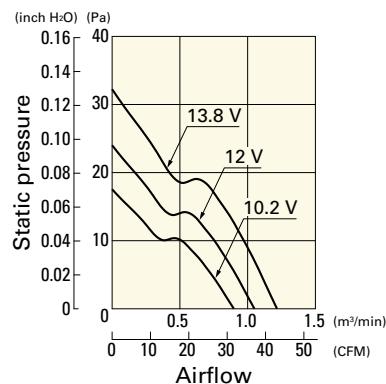


9GA0912L401 With pulse sensor

Operating voltage range

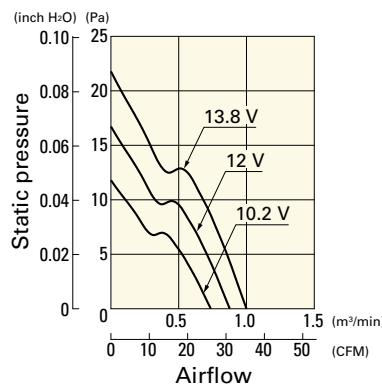


9GA0924H401 With pulse sensor

Operating voltage range

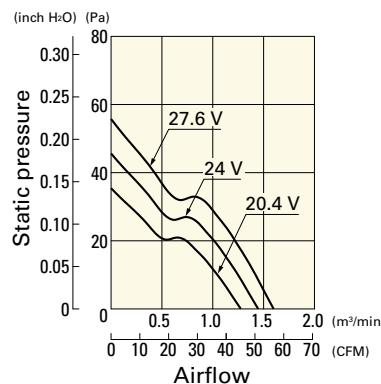


9GA0924W401 With pulse sensor

Operating voltage range

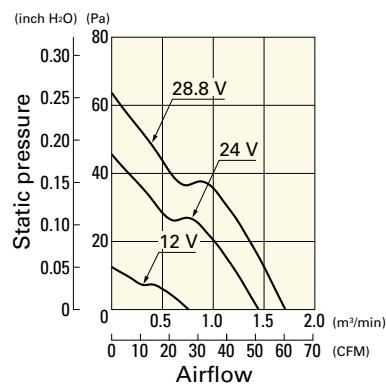


9GA0924F401 With pulse sensor

Operating voltage range

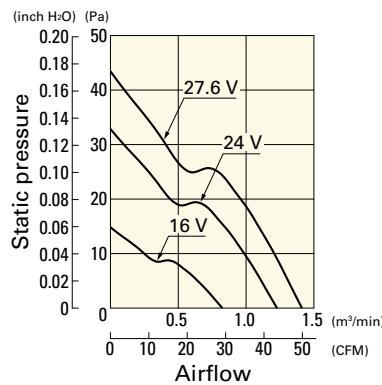


9GA0924M401 With pulse sensor

Operating voltage range

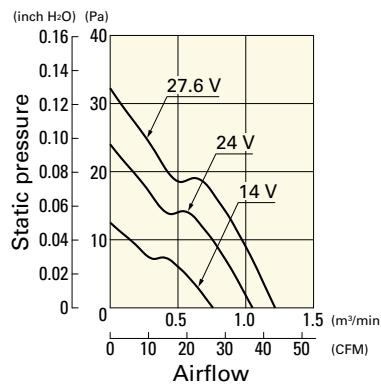


9GA0924L401 With pulse sensor


Operating voltage range

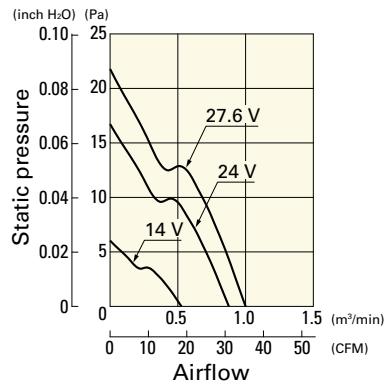

## Dimensions (unit: mm) (With ribs)

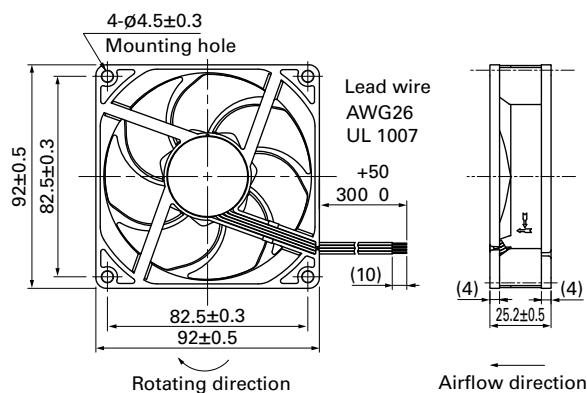

## ■ Reference Dimensions of Mounting Holes and Vent Opening (unit: mm)

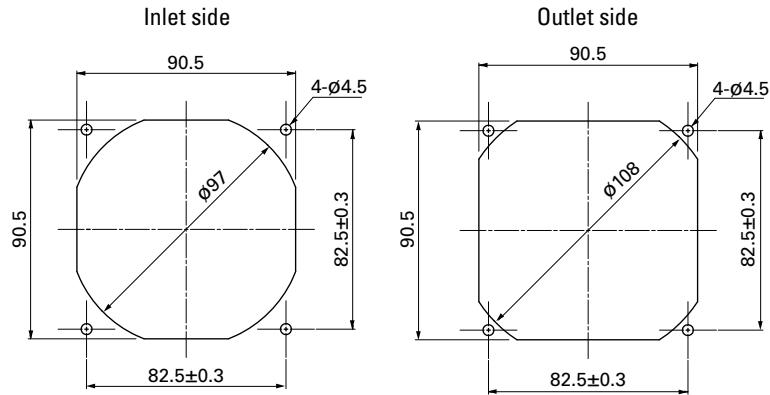

## ■ Options

### Finger guards

page: p. 558

Model no.: 109-099E, 109-099H, 109-099C

### Resin finger guards

page: p. 565

Model no.: 109-1001G

### Resin filter kits

page: p. 566

Model no.: 109-1001F13 (13PPI), 109-1001F20 (20PPI),  
109-1001F30 (30PPI), 109-1001F40 (40PPI)

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for DC Fans category:***

***Click to view products by Sanyo Denki manufacturer:***

Other Similar products are found below :

[AUB0612L](#) [AFB0948HH-S687](#) [G2E085-AA05-10](#) [4318/12T](#) [AUB0912H-F00](#) [3412N/2ME](#) [W2G110-AM39-01](#) [8412GLV](#) [8412NGL-12](#)  
[6448-384](#) [4114N/17-251](#) [4318/2R](#) [4412F/2D](#) [424JMU](#) [4414/2HH](#) [4112 N/12GL-175](#) [9GA0924L4021](#) [9GA0924M4021](#) [9GA0924M4011](#)  
[9GA0812A2D0011](#) [9GA0912M4D011](#) [9GA0924W4D01](#) [9GA0912F4021](#) [9GA0912F402](#) [9GA0912H4D011](#) [9GA0824L20021](#)  
[9GA0824L20011](#) [9GA0812A2002](#) [9GA0812B20011](#) [9GA0812B2D001](#) [9GA0812L20021](#) [9WP1248M1021](#) [9GA0812A2D001](#)  
[9GA0824L2D001](#) [9GA0924W4D011](#) [9GA0912W402](#) [9GA0912M402](#) [9GA0824B2D001](#) [9GA0824A20021](#) [9GA0912W4021](#)  
[9GA0924W402](#) [9GA0812L2D0011](#) [9GA0812A20021](#) [9GA0824B2D0011](#) [9GA0824L2001](#) [9GA0824L2002](#) [9GA0812L2D001](#)  
[9GA0824L2D0011](#) [9GA0912M401](#) [9GA0924M402](#)