



# 60×60×25 mm

San Ace 60W 9WL type   

DC  
Splash Proof Fan 60 mm sq.

## General Specifications

- Material ..... Frame: Aluminum (Black coating), Impeller: Plastic (Flammability: UL 94V-1)
- Expected life ..... See the table below. (L10 life: 90% survival rate for continuous operation in indoor free air at 60°C, rated voltage)
- Motor protection function ..... Locked rotor burnout protection, Reverse polarity protection  
For details, please refer to p. 547.
- Dielectric strength ..... 50/60 Hz, 500 VAC, for 1 minute (between lead wire conductors and frame)
- Insulation resistance ..... 10 MΩ or more with a 500 VDC megger (between lead wire conductors and frame)
- Sound pressure level (SPL) ..... At 1 m away from the air inlet
- Storage temperature ..... -30 to +70°C (Non-condensing)
- Lead wire ..... ⊕Red ⊖Black Sensor Yellow Control Brown
- Mass ..... 120 g
- Ingress protection ..... IP68

## Specifications

The models listed below **have pulse sensors with PWM control function.**

| Model no.     | Rated voltage [V] | Operating voltage range [V] | PWM duty cycle* [%] | Rated current [A] | Rated input [W] | Rated speed [min <sup>-1</sup> ] | Max. airflow [m <sup>3</sup> /min] [CFM] | Max. static pressure [Pa] [inchH <sub>2</sub> O] | SPL [dB (A)] | Operating temperature [°C] | Expected life [h] |
|---------------|-------------------|-----------------------------|---------------------|-------------------|-----------------|----------------------------------|--|--|--------------|----------------------------|-------------------|
| 9WL0612P4S001 | 12                | 10.8 to 13.2                | 100                 | 0.67              | 8.04            | 11000                            | 1.4 49.4                                 | 300 1.204  | 53           | -20 to +70                 | 180000/60°C       |
|               |                   |                             | 20                  | 0.06              | 0.72            | 2900                             | 0.36 12.7                                | 20.8 0.083                                       | 20           |                            |                   |
| 9WL0612P4J001 |                   |                             | 100                 | 0.39              | 4.68            | 8650                             | 1.1 38.8                                 | 182 0.73   | 47           |                            |                   |
|               |                   |                             | 20                  | 0.03              | 0.36            | 1150                             | 0.13 4.8                                 | 3.3 0.013  | 14           |                            |                   |
| 9WL0612P4H001 |                   |                             | 100                 | 0.17              | 2.04            | 6150                             | 0.78 27.5                                | 97 0.389   | 36           |                            |                   |
|               |                   |                             | 20                  | 0.03              | 0.36            | 1350                             | 0.17 6.0                                 | 4.7 0.018  | 14           |                            |                   |
| 9WL0624P4S001 | 24                | 21.6 to 26.4                | 100                 | 0.34              | 8.16            | 11000                            | 1.4 49.4                                 | 300 1.204  | 53           |                            |                   |
|               |                   |                             | 20                  | 0.03              | 0.72            | 2900                             | 0.36 12.7                                | 20.8 0.083                                       | 20           |                            |                   |
| 9WL0624P4J001 |                   |                             | 100                 | 0.19              | 4.56            | 8650                             | 1.1 38.8                                 | 182 0.73   | 47           |                            |                   |
|               |                   |                             | 20                  | 0.02              | 0.48            | 2200                             | 0.28 9.8                                 | 12.0 0.048                                       | 17           |                            |                   |
| 9WL0624P4H001 |                   |                             | 100                 | 0.08              | 1.92            | 6150                             | 0.78 27.5                                | 97 0.389   | 36           |                            |                   |
|               |                   |                             | 20                  | 0.02              | 0.48            | 1300                             | 0.16 5.6                                 | 4.3 0.017  | 14           |                            |                   |

\* PWM frequency: 25 kHz. Fan does not rotate when PWM duty cycle is 0%.

The following sensor and control options are available for selection.

Differs according to the model. Refer to the table on p. 579. Without sensor Pulse sensor Lock sensor




## Airflow - Static Pressure Characteristics / PWM Duty - Speed Characteristics Example

**9WL0612P4S001** With pulse sensor with PWM control function

PWM duty cycle

Operating voltage range


PWM duty - Speed characteristics example

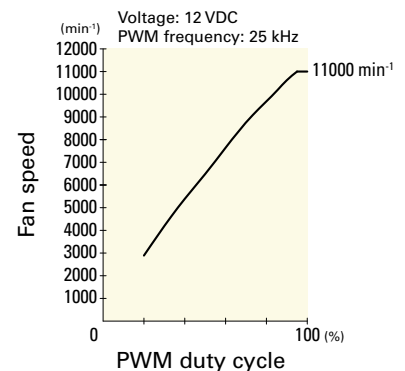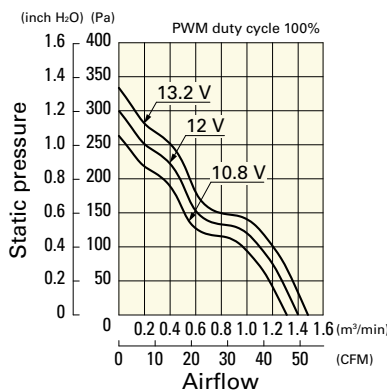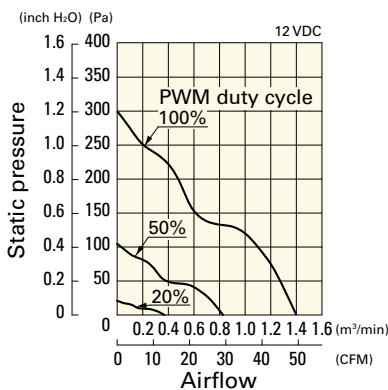


# Airflow - Static Pressure Characteristics / PWM Duty - Speed Characteristics Example

**9WL0612P4J001** With pulse sensor with PWM control function


PWM duty cycle

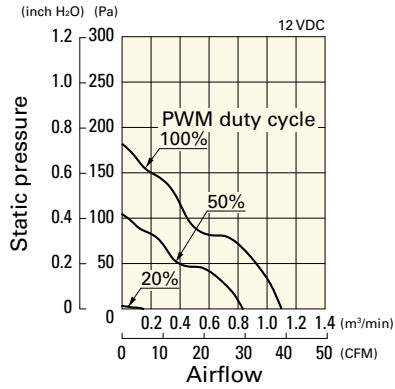

Operating voltage range

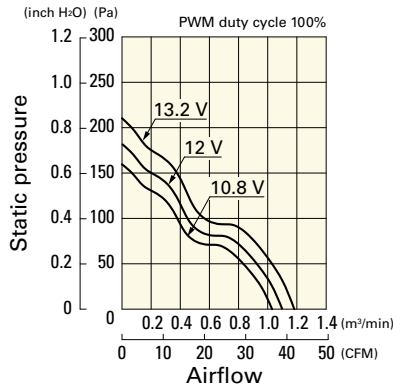


PWM duty - Speed characteristics example

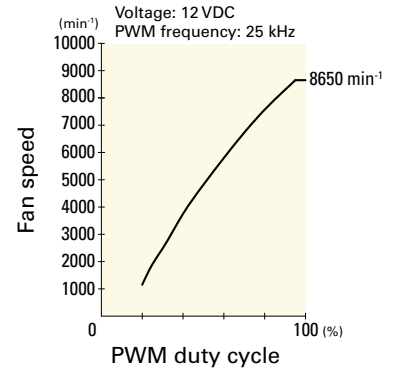


**9WL0612P4H001** With pulse sensor with PWM control function


PWM duty cycle

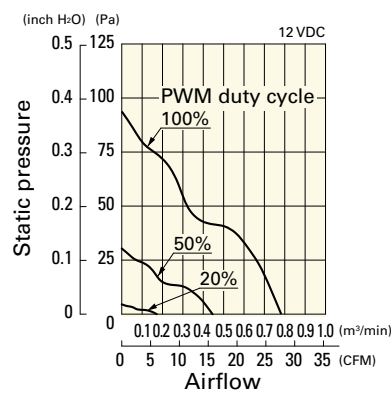

Operating voltage range

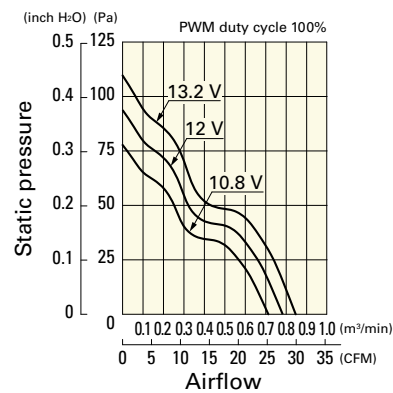


PWM duty - Speed characteristics example

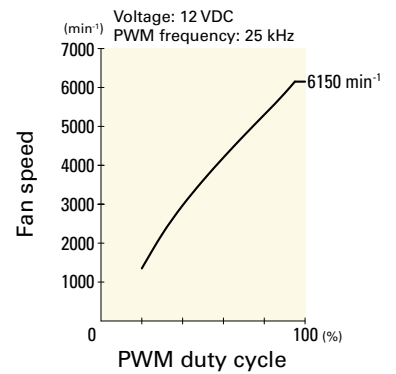


**9WL0624P4S001** With pulse sensor with PWM control function


PWM duty cycle

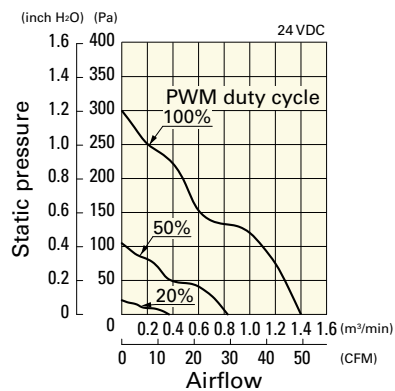

Operating voltage range

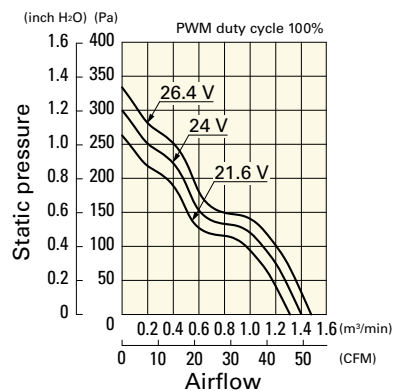


PWM duty - Speed characteristics example

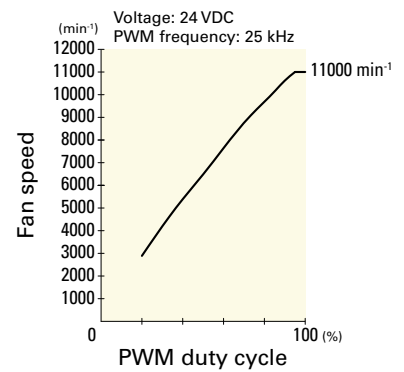


**9WL0624P4J001** With pulse sensor with PWM control function


PWM duty cycle

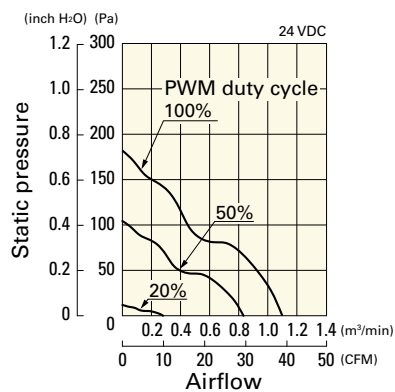

Operating voltage range

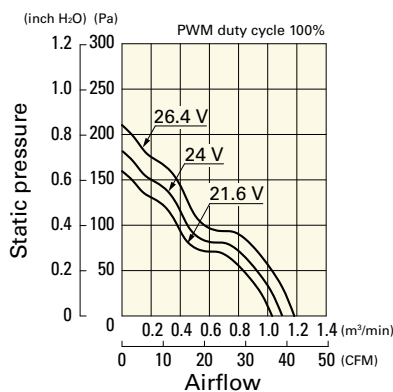


PWM duty - Speed characteristics example

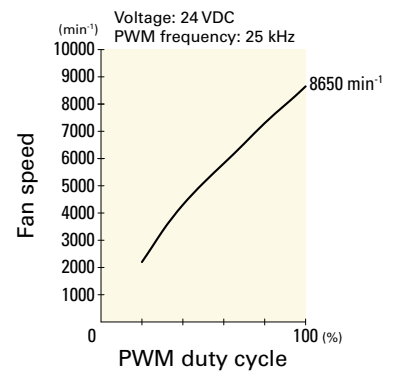


## Airflow - Static Pressure Characteristics / PWM Duty - Speed Characteristics Example

**9WL0624P4H001** With pulse sensor with PWM control function


PWM duty cycle

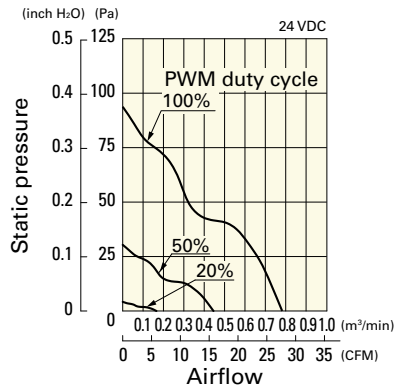


Operating voltage range

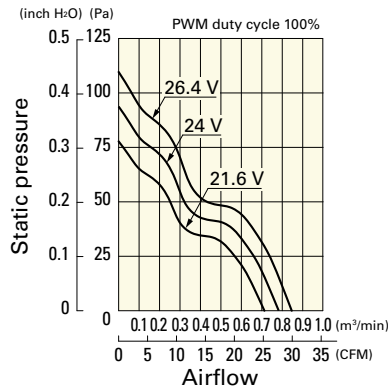

PWM duty - Speed characteristics example

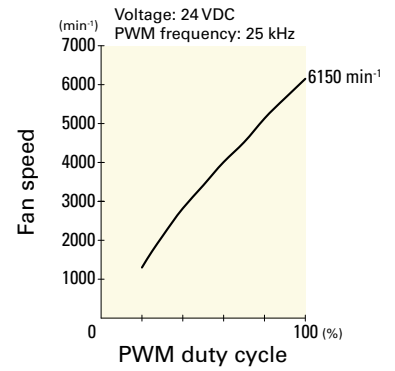


## Dimensions (unit: mm)

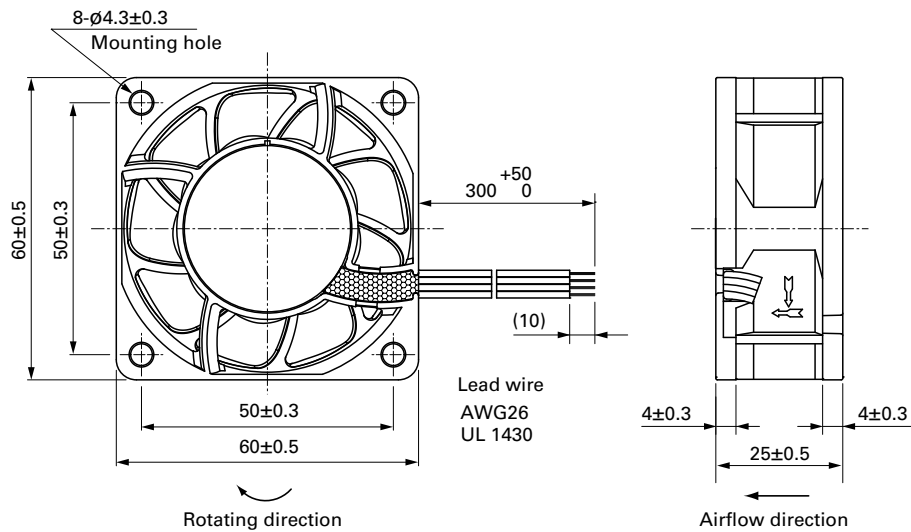

## Reference Dimensions of Mounting Holes and Vent Opening (unit: mm)

Inlet side, Outlet side

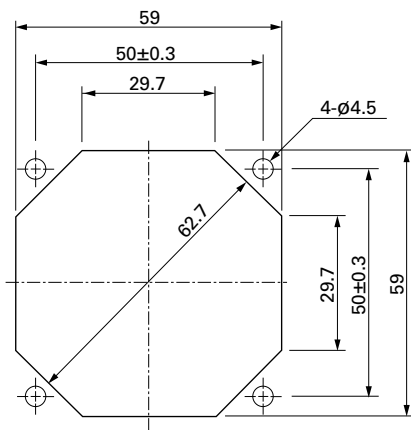

## Options

Finger guards

page: p. 532

Model no.: 109-139E, 109-139H

Resin finger guards

page: p. 539

Model no.: 109-1003G

DC  
Splash Proof Fan 60 mm sq.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [DC Fans](#) category:*

*Click to view products by [Sanyo Denki](#) manufacturer:*

Other Similar products are found below :

[614R](#) [AUB0612L](#) [AFB0948HH-S687](#) [G2E085-AA05-10](#) [4318/12T](#) [AUB0912H-F00](#) [3412N/2ME](#) [W2G110-AM39-01](#) [8412GLV](#) [8412NGL-12](#) [6448-384](#) [4114N/17-251](#) [4318/2R](#) [4412F/2D](#) [424JMU](#) [4414/2HH](#) [4112 N/12GL-175](#) [9GA0912F402](#) [9GA0812B20011](#)  
[AFB0824SHBAV1](#) [DV5214/2NP-230](#) [9GA0912H4021](#) [THC1548MGDJJ](#) [9GA0812B2001](#) [GFB1224SHG](#) [8500NU](#) [9WG1212E101-E](#)  
[3241.124](#) [DC0401012V2B-3T0](#) [ASFP14391](#) [ASFP64371](#) [ASFP64391](#) [ASFP84391](#) [ASFP92391](#) [9A0612G402](#) [AD5012HB-C71](#)  
[AD5012MB-C71](#) [ASFP84372](#) [ASFP64372](#) [31100-000440-RS](#) [ASFP14372](#) [ASFP16371](#) [ASFP40770](#) [ASFP42770](#) [ASFP44770](#) [ASFP64392](#)  
[ASFP82392](#) [ASFP84392](#) [ASFP92371](#) [ASFP92392](#)