

Vacuum hose

VSL 6-4 PU

Part no.:10.07.09.00002

<https://www.schmalz.com/10.07.09.00002>

Homepage > Vacuum Technology for Automation > Vacuum Components > Filters and Connections > Hoses and Connectors > Vacuum /


Compressed Air Hoses VSL > VSL 6-4 PU

Hose for vacuum and compressed-air systems



External diameter D: 6 mm
Internal diameter d: 4 mm
Length (max): 500 m
Material: PU
Installation radius (min): 35 mm
Pressure range (operating pressure):
-0.95 ... 10.00 bar
Ambient temperature: -20 ... 90 °C

Design Data

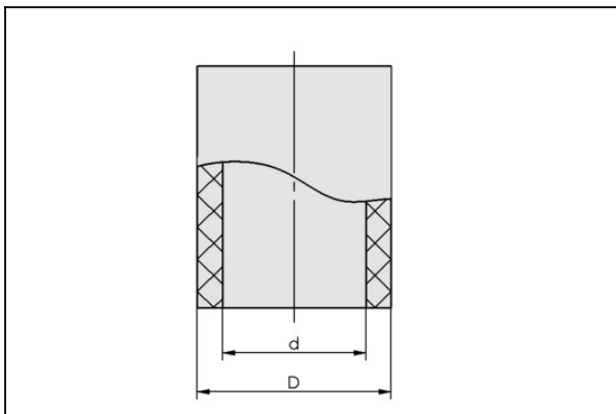

Attribute	Value
d	4 mm
D	6 mm


Accessories

Vacuum hose

VSL 6-4 PU

Part no.:10.07.09.00002

<https://www.schmalz.com/10.07.09.00002>

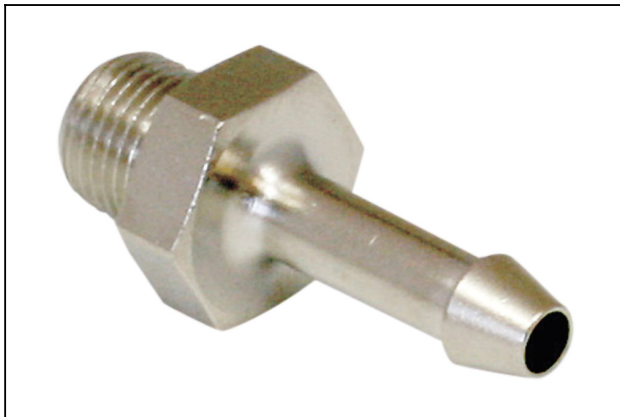

ST G1/8-AG 4 MS-V

Part no.10.08.03.00153

Hose sleeve

Thread G1: G1/8"-M

Internal hose diameter: 4 mm

Material: Brass

Surface: nickel plated



ST M5-AG 4 MS-V

Part no.10.08.03.00152

Hose sleeve

Thread G1: M5-M

Internal hose diameter: 4 mm

Material: Brass

Surface: nickel plated



STV-GE G1/4-AG 6

Part no.10.08.02.00205

Push-in Fitting, straight

Thread G1: G1/4"-M

External hose diameter: 6 mm

Material: Brass

Surface: nickel plated

Ambient temperature: -20 ... 80 °C

Vacuum hose

VSL 6-4 PU

Part no.:10.07.09.00002

<https://www.schmalz.com/10.07.09.00002>



STV-GE G1/8-AG 6

Part no.10.08.02.00204

Push-in Fitting, straight

Thread G1: G1/8"-M

External hose diameter: 6 mm

Material: Brass

Surface: nickel plated

Ambient temperature: -20 ... 80 °C



STV-GE G1/8-AG 6 HT

Part no.10.08.02.00389

Push-in Fitting, straight

Thread G1: G1/8"-M

External hose diameter: 6 mm

Material: Brass

Surface: nickel plated

Ambient temperature: -50 ... 200 °C

Type: HT



STV-GE M5-AG 6

Part no.10.08.02.00201

Push-in Fitting, straight

Thread G1: M5-M

External hose diameter: 6 mm

Material: Brass

Surface: nickel plated

Ambient temperature: -20 ... 80 °C

Vacuum hose

VSL 6-4 PU

Part no.:10.07.09.00002

<https://www.schmalz.com/10.07.09.00002>



STV-GE M5-AG 6 HT

Part no.10.08.02.00396

Push-in Fitting, straight

Thread G1: M5-M

External hose diameter: 6 mm

Material: Brass

Surface: nickel plated

Ambient temperature: -50 ... 200 °C

Type: HT



STVI-GE G1/4-IG 6

Part no.10.08.02.00153

Push-in Fitting, straight

Thread G1: G1/4"-F

External hose diameter: 6 mm

Material: Brass

Surface: nickel plated

Ambient temperature: -20 ... 80 °C



STVI-GE G1/8-IG 6

Part no.10.08.02.00150

Push-in Fitting, straight

Thread G1: G1/8"-F

External hose diameter: 6 mm

Material: Brass

Surface: nickel plated

Ambient temperature: -20 ... 80 °C

Vacuum hose

VSL 6-4 PU

Part no.:10.07.09.00002

<https://www.schmalz.com/10.07.09.00002>



STV-T G1/4-AG 6

Part no.10.09.02.00042

Push-in Fitting, T

Thread G1: G1/4"-M

External hose diameter: 6 mm

Length L: 41 mm

Material: Brass

Surface: nickel plated



STV-T G1/8-AG 6

Part no.10.09.02.00040

Push-in Fitting, T

Thread G1: G1/8"-M

External hose diameter: 6 mm

Length L: 41.5 mm

Material: Brass

Surface: nickel plated



STV-W G1/4-AG 6

Part no.10.08.02.00159

Push-in Fitting, swivelling elbow

Thread G1: G1/4"-M

External hose diameter: 6 mm

Material: Brass, nickel-plated

Ambient temperature: -20 ... 80 °C

Vacuum hose

VSL 6-4 PU

Part no.:10.07.09.00002

<https://www.schmalz.com/10.07.09.00002>



STV-W G1/8-AG 6

Part no.10.08.02.00288

Push-in Fitting, swivelling elbow

Thread G1: G1/8"-M

External hose diameter: 6 mm

Material: Plastic



STV-W G1/8-AG 6

Part no.10.08.02.00158

Push-in Fitting, swivelling elbow

Thread G1: G1/8"-M

External hose diameter: 6 mm

Material: Brass, nickel-plated

Ambient temperature: -20 ... 80 °C



STV-W G1/8-AG 6 HT

Part no.10.08.02.00391

Push-in Fitting, swivelling elbow

Thread G1: G1/8"-M

External hose diameter: 6 mm

Material: Brass

Surface: nickel plated

Ambient temperature: -50 ... 200 °C

Type: HT

Vacuum hose

VSL 6-4 PU

Part no.:10.07.09.00002

<https://www.schmalz.com/10.07.09.00002>



STV-W M5-AG 6

Part no.10.08.02.00296

Push-in Fitting, swivelling elbow

Thread G1: M5-M

External hose diameter: 6 mm

Material: Plastic



STV-W M5-AG 6

Part no.10.08.02.00235

Push-in Fitting, swivelling elbow

Thread G1: M5-M

External hose diameter: 6 mm

Material: Brass, nickel-plated

Ambient temperature: -20 ... 80 °C



STV-W M5-AG 6 HT

Part no.10.08.02.00397

Push-in Fitting, swivelling elbow

Thread G1: M5-M

External hose diameter: 6 mm

Material: Brass

Surface: nickel plated

Ambient temperature: -50 ... 200 °C

Type: HT

Vacuum hose

VSL 6-4 PU

Part no.:10.07.09.00002

<https://www.schmalz.com/10.07.09.00002>



STV-WF G1/4-AG 6

Part no.10.08.02.00169

Push-in Fitting, swivelling and lockable

Thread G1: G1/4"-M

External hose diameter: 6 mm

Material: Brass, nickel-plated

Ambient temperature: -10 ... 70 °C



STV-WF G1/8-AG 6

Part no.10.08.02.00168

Push-in Fitting, swivelling and lockable

Thread G1: G1/8"-M

External hose diameter: 6 mm

Material: Brass, nickel-plated

Ambient temperature: -10 ... 70 °C



SVB-T 6

Part no.10.09.02.00021

Plug connection, T

External hose diameter: 6 mm

Length L: 42 mm

Material: Brass

Surface: nickel plated

Ambient temperature: -20 ... 80 °C

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Bench Top Tools](#) category:

Click to view products by [SCHMALZ](#) manufacturer:

Other Similar products are found below :

[0027](#) [6104-201-2102](#) [6104-201-2502](#) [6-1372442-6](#) [62500-1584](#) [63801-7252](#) [63801-7269](#) [69002-5525](#) [691667-1](#) [768539-1](#) [854130-1](#)
[854946-2](#) [856203-1](#) [904449-1](#) [9-22280-9](#) [986096-2](#) [992438-3](#) [1-21000-3](#) [1-21000-4](#) [1-21000-1](#) [1-25022-4](#) [1302263353](#) [1424264-1](#)
[1424267-1](#) [1428211-1](#) [1-455755-6](#) [1752324-1](#) [1752744-1](#) [18023-9](#) [189763-1](#) [1901726-1](#) [1954222-1](#) [2079747-1](#) [21001-2](#) [2119083-1](#)
[2119085-1](#) [2119371-1](#) [2161362-2](#) [2161930-1](#) [2217088-2](#) [2217339-1](#) [2217347-1](#) [22281-9](#) [22374-7](#) [240825-4](#) [992342-2](#) [2030790-2](#) [2063796-1](#) [2063799-2](#) [2119092-1](#)