

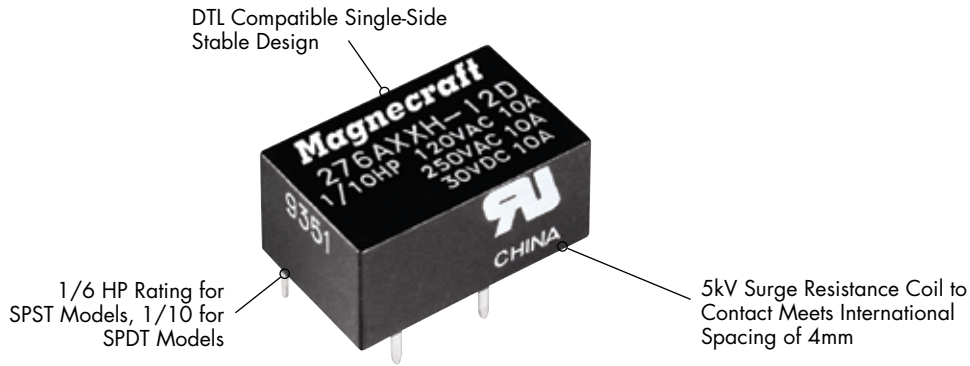


276 Low Profile PCB Mount Power Relay/SPST and SPDT 7 - 10 Amp Rated



General Specifications		(UL 508)		276XAX	276AXX
Contact Characteristics			Units	7 Amp	10 Amp
Number and type of Contacts				SPDT	SPST-NO
Contact materials				Silver Alloy	Silver Alloy
Current rating			A	7	10
Switching voltage			V	240 50/60 Hz	240 50/60 Hz
			V	30	30
			HP	1/10 @ 120VAC	1/6 @ 120VAC
Minimum Switching Requirement	Minimum		mA	100	100
Coil Characteristics					
Voltage Range			V	3...24	3...24
Operating Range				80% to 110%	80% to 110%
Average consumption	% of Nominal		W	0.2	0.2
Drop-out voltage threshold				10%	10%
Performance Characteristics					
Electrical Life	Operations @ Rated Current (Resistive)			100,000	100,000
Mechanical Life	Unpowered			5,000,000	5,000,000
Operating time (response time)			ms	10	10
Dielectric	Between coil and contact		V	2000	2000
	Between contacts		V	1000	1000
Environment					
Product certifications	Standard version			UL	UL
Ambient air temperature around the device	Storage		°C	-40...+85	-40...+85
	Operation		°C	-40...+55	-40...+55
Vibration resistance	Operational		g-n	3, 10-55 Hz	3, 10-55 Hz
Shock resistance			g-n	20	20
Weight			grams	5.5	5.5

WIRING DIAGRAMS TOP VIEW

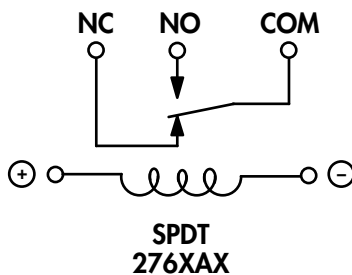




Standard Part Numbers

BOLD-FACED PART NUMBERS ARE NORMALLY STOCKED

Nominal Input Voltage	Nominal Coil Resistance (Ω)	Part Number	Contact Configuration
5 VDC	125 Ω	276AXXH-5D	SPST-NO
6 VDC	180 Ω	276AXXH-6D	SPST-NO
12 VDC	720 Ω	276AXXH-12D	SPST-NO
24 VDC	2880 Ω	276AXXH-24D	SPST-NO
5 VDC	125 Ω	276XAXH-5D	SPDT
6 VDC	180 Ω	276XAXH-6D	SPDT
12 VDC	720 Ω	276XAXH-12D	SPDT
24 VDC	2880 Ω	276XAXH-24D	SPDT

Part Number Builder

Series	Contact Configuration	Type of Seal	Coil Voltage	Current Type
276	XAX	H	-12	D
276	AXX = SPST - NO XAX = SPDT	H = Epoxy Sealed	5 = 5VDC 6 = 6VDC 12 = 12VDC 24 = 24VDC	D = DC Coil

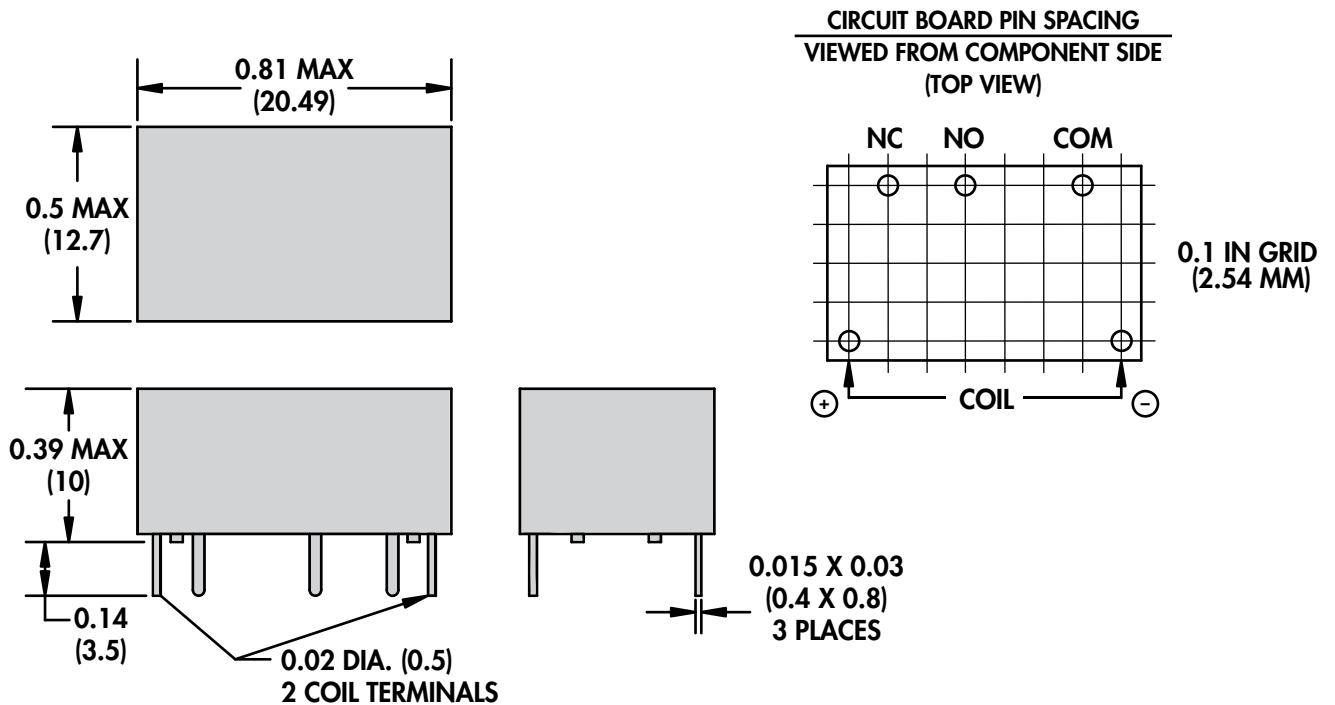

DRAWING AND PIN SPACING ENLARGED TO 200% OF ACTUAL SIZE

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [General Purpose Relays](#) category:

Click to view products by [Schneider](#) manufacturer:

Other Similar products are found below :

[PCN-105D3MH,000](#) [59641F200](#) [LY1SAC110120](#) [5X827E](#) [5X837F](#) [5X840F](#) [5X842F](#) [5X848E](#) [LY2N-AC120](#) [LY2S-AC220/240](#) [LY2-US-AC120](#) [LY3-US-AC120](#) [LY4F-UA-DC12](#) [LY4F-UA-DC24](#) [LY4F-US-AC120](#) [LY4F-US-AC240](#) [LY4F-US-DC24](#) [LY4F-VD-AC110](#) [LYQ20DC12](#) [M115C60](#) [M115N010](#) [M115N0150](#) [6031007G](#) [603-12D](#) [61211T0B4](#) [61212T400](#) [61222Q400](#) [61243B600](#) [61243C500](#) [61243Q400](#) [61311BOA2](#) [61311BOA6](#) [61311BOA8](#) [61311C0A2](#) [61311COA1](#) [61311COA6](#) [61311F0A2](#) [61311QOA1](#) [61311QOA4](#) [61311T0D6](#) [61311TOA6](#) [61311TOA7](#) [61311TOB3](#) [61311TOB4](#) [61311U0A6](#) [61312Q600](#) [61312T400](#) [61312T600](#) [61313U200](#) [61313U400](#)