Advantages of a Finger-Safe, Ice Cube Socket System

The Complete System Solution!



- Offers a "one stop solution" for your power management system.
- Variety of contact configurations and materials to meet your switching needs.
- Plug-In switching capabilities from 10mA to 20 Amps.
- A variety of Feature Codes and operation combinations available for all budgets.
- Ejector clips, ribbed relay housings and space-saving sockets allow for easy removal from crowded DIN rails.
- Color and appearance designed for high visibility in all environments.
- Wiring diagrams include NEMA and IEC standards.
- Engineering availability allows for customized relay solutions.
- Internal Coil Bus Jumper System reduces the number of wires required for hook-up to adjacent sockets.



I.D. Tag/Write-On Plastic Label Used for Custom Identification of Circuits.

Isolated Input and Output Terminals Separates Control Circuits from Load Circuits.

> Slim Design Minimizes Space on DIN Rail.

Mating Hold-Down Clips Available Secures Relay to Socket.



DIN Rail End Clip

Locking Screw Keeps a Snug DIN Rail System by Eliminating Sliding Sockets.

DIN Rail

35 mm Extruded Aluminum Rail. Designed to Work With Most Sockets. Pre-punched for Quick Installation.



Modules Allows for Optional Protection or LED Modules to be Used With Sockets.

0

10-BSNN-


The 700 series sockets have the perfect mix of historical Magnecraft socket quality combined with a dynamic arsenal of options. When mated with the Magnecraft relays and accessories, these RoHS compliant sockets provide a complete modular system that will meet all your plug-in relay requirements in a package that is both visually appealing and functionally outstanding resulting in a Complete Solution.


> **Finger-Safe** Protects Operators from Live Circuits.

Internal Coil Bus Jumper System Allows Connection to Adjacent Sockets Without Additional Wiring.

2-Way Side or DIN Rail Mounting System Retrofits Existing Panel Mounting and 35 mm DIN Rail. **I.D. Tag/Write-On Plastic Label** Used for Identification of Relays in Multi-Relay Circuits.

70-782EL14-1 Socket/10 Amp Rating, 300 Volts

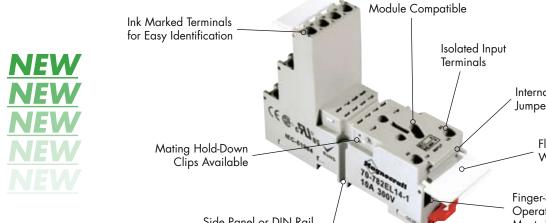

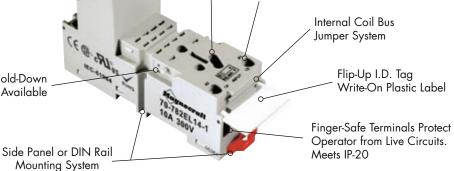

SECTION 2


BOLD-FACED PART NUMBERS ARE NORMALLY STOCKED


c RU us	Æ	CE	\bigcirc	
UL Recognized File No. E70550	Certified 40787		RoHS Compliant	

Standard Part Number	Description		
70-782EL14-1	14-Pin Ice Cube, Logic Style, DIN Panel Mount with Elevator Terminals, Module Compatible.		

General Specifications (UL 508)

General Specifications (UL SU	•		
Characteristics	Units	Value	
Number of Terminals		14	
Electrical Rating			
Nominal Voltage Rating	Volts	300	
Nominal Current Rating	Amps	10	
Dielectric Strength			
Output to Adjacent Output Terminals	V rms	3000	
Output to Input Terminals	V rms	3000	
Terminals to Rail / Chassis	V rms	3000	
Temperature			
Operating Range:	°C	- 40 to + 80	
Storage Range:	°C	- 40 to + 105	
Construction			
Protection Category (Finger-Safe)	EN 60529	IP 20	
Internal Metal Tracks		Copper Alloy, Zinc Plated	
Screw Terminals		Steel, Zinc Plated	
Screw Style		Combination Head,	
Screw size	mm	M3	
Screw Torque 3.5 mm (Maximum)	Lb-in / Nm	7 / 0.8	
Miscellaneous			
		Din / Panel	
Socket Mounting:	EN 60204-1	AWG mm2	
Wire Size Capacity (Maximum) Soild Cu	AWG, mm2	16 / 18 (2) 1.5 /0.75 (2)	
Stranded Cu	AWG, mm2	16 / 18 (2) 1.5 / 0.75 (2)	
Wire Connection Method	AvvG, mmz	Elevator	
DIN Rail Mounting	EN 60715	35mm	
Chassis Mount Screw Torque	Lin 00/15	7 / 0.8	
Flamability Rating	Class	94V-0	
Body Color		Light Gray	
DIN Locking Method		Red Plastic Locking Clip	
Product Certification		UL, CSA	
Conformance		CE, RoHS	
Weight	grams	62	
* veigini	giuns	02	

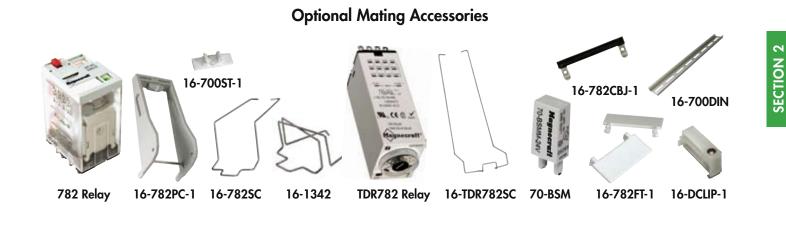

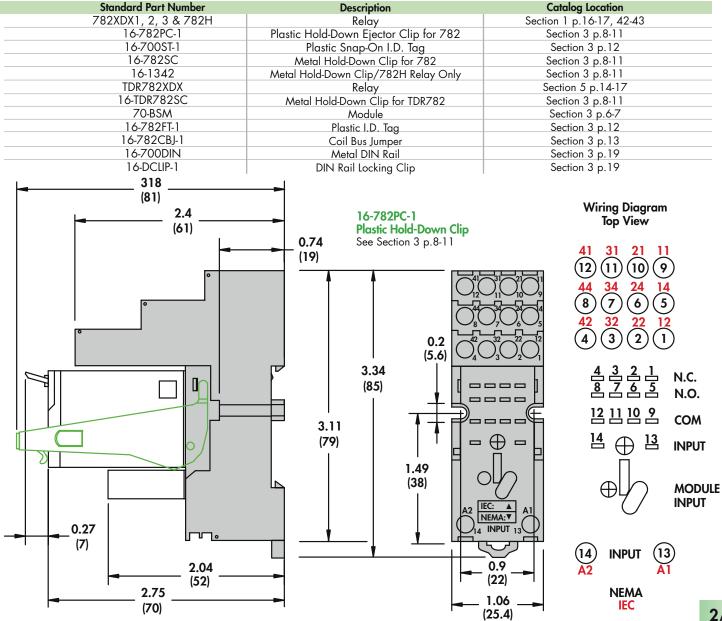

Magnecraft Solution Guide 105A

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Relay Sockets & Fixings category:

Click to view products by Schneider manufacturer:

Other Similar products are found below :

00008258500
00111976502
0000-825-81-00
60SY4S05
M41G
670-0125
670-0127
6700152
670-0153
6700156
D258-2TS00
70-309
7

1393143-3
7-1616360-5
8000-DG2-5
911361
9-1616339-5
PJF11N
GDA12HA
GDA12SA
GDA12SD
GDA16HD
GDA22HA

GDA95A
GDA95D
GFX20
PT08QN
PT 1/8 D = 3.2
GUA1
GUA2-11
GUA4-04
GUA4-31
GUM5R
GUR-120
GUR-24
GUR-240

GUR-277
GURX-277
GUW12
GUW95
GUZ63L
R99-11
FOR MY(NAMEPLATE)
D52PR2T
RES100K
1310H-HDC
1390H-1ST

1393824-3
1390H-2PC
1410-2SM
6000-2SM
6000-2SM</td