Advantages of a Finger-Safe, Ice Cube Socket System

The Complete System Solution!



- Offers a "one stop solution" for your power management system.
- Variety of contact configurations and materials to meet your switching needs.
- Plug-In switching capabilities from 10mA to 20 Amps.
- A variety of Feature Codes and operation combinations available for all budgets.
- Ejector clips, ribbed relay housings and space-saving sockets allow for easy removal from crowded DIN rails.
- Color and appearance designed for high visibility in all environments.
- Wiring diagrams include NEMA and IEC standards.
- Engineering availability allows for customized relay solutions.
- Internal Coil Bus Jumper System reduces the number of wires required for hook-up to adjacent sockets.



I.D. Tag/Write-On Plastic Label Used for Custom Identification of Circuits.

Isolated Input and Output Terminals Separates Control Circuits from Load Circuits.

> Slim Design Minimizes Space on DIN Rail.

Mating Hold-Down Clips Available Secures Relay to Socket.



DIN Rail End Clip

Locking Screw Keeps a Snug DIN Rail System by Eliminating Sliding Sockets.

DIN Rail

35 mm Extruded Aluminum Rail. Designed to Work With Most Sockets. Pre-punched for Quick Installation.



Modules Allows for Optional Protection or LED Modules to be Used With Sockets.

0

10-BSNN-

The 700 series sockets have the perfect mix of historical Magnecraft socket quality combined with a dynamic arsenal of options. When mated with the Magnecraft relays and accessories, these RoHS compliant sockets provide a complete modular system that will meet all your plug-in relay requirements in a package that is both visually appealing and functionally outstanding resulting in a Complete Solution.

> **Finger-Safe** Protects Operators from Live Circuits.

Internal Coil Bus Jumper System Allows Connection to Adjacent Sockets Without Additional Wiring.

2-Way Side or DIN Rail Mounting System Retrofits Existing Panel Mounting and 35 mm DIN Rail. **I.D. Tag/Write-On Plastic Label** Used for Identification of Relays in Multi-Relay Circuits.

70-782EL8-1 Socket/12 Amp Rating, 300 Volts

EW

	Compatible
Ink Marked Terminals for Easy Identification	Isolated Input Terminals
CE Q. D. C.	Internal Coil Bus Jumper System
Mating Hold-Down	Flip-Up I.D. Tag Write-On Plastic Label
Clips Available Side Panel or DIN Rail Mounting System	Finger-Safe Terminals Protect Operator from Live Circuits. Meets IP-20



C	t	RoHS

BOLD-FACED PAR1	NUMBERS ARE NORMALLY STOCKED
Standard Part Number	Description


General Specifications (UL 508)

General Specifications (UL 50		
Characteristics	Units	Value
Number of Terminals		8
Flandstein Deutere		
Electrical Rating	Volts	300
Nominal Voltage Rating		12
Nominal Current Rating	Amps	12
Dielectric Strength		
Output to Adjacent Output Terminals	V rms	3000
Output to Input Terminals	V rms	3000
Terminals to Rail / Chassis	V rms	3000
Temperature	1	
Operating Range:	°C	- 40 to + 80
Storage Range:	°Č	- 40 to + 105
Slordge Kunge.	Č	
Construction		
Protection Category (Finger-Safe)	EN 60529	IP 20
Internal Metal Tracks		Copper Alloy, Zinc Plated
Screw Terminals		Steel, Zinc Plated
Screw Style		Combination Head,
Screw size	mm	M3
Screw Torque 3.5 mm (Maximum)	Lb-in / Nm	7 / 0.8
Miscellaneous		
Socket Mounting:		Din / Panel
Wire Size Capacity (Maximum)	EN 60204-1	AWG mm2
Soild Cu	AWG, mm2	14 / 16 (2) 2.5 / 1.5 (2)
Stranded Cu	AWG, mm2	14 / 16 (2) 2.5 / 1.5 (2)
Wire Connection Method		Élevator
DIN Rail Mounting	EN 60715	35mm
Chassis Mount Screw Torque	Lb-in / Nm	7 / 0.8
Flamability Rating	Class	94V-0
Body Color		Light Gray
DIN Locking Method		Red Plastic Locking Clip
Product Certification		UL, CSA
Conformance		CE, RoHS
Weight	grams	46



Optional Mating Accessories

Standard Part Number	Description	Catalog Location
782XBX1, 2, 3	Relay	Section 1 p.14-15
16-782PC-1	Plastic Hold-Down Ejector Clip for 782	Section 3 p.8-11
16-700ST-1	Plastic Snap-On I.D. Tag	Section 3 p.12
16-782SC	Metal Hold-Down Clip for 782	Section 3 p.8-11
TDR782XBX	Relay	Section 5 p.14-17
16-TDR782SC	Metal Hold-Down Ćlip for TDR782	Section 3 p.8-11
70-BSM	Module	Section 3 p.6-7
16-782FT-1	Plastic I.D. Tag	Section 3 p.12
16-782CBJ-1	Coil Bus Jumper	Section 3 p.13
16-700DIN	Metal DIN Rail	Section 3 p.19
16-DCLIP-1	DIN Rail Locking Clip	Section 3 p.19

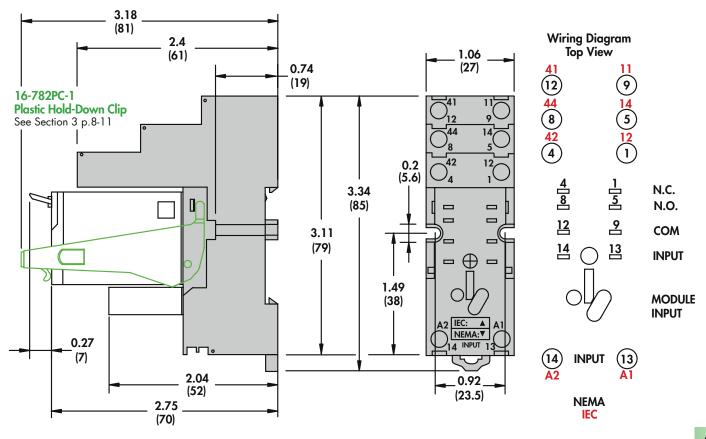

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Relay Sockets & Fixings category:

Click to view products by Schneider manufacturer:

Other Similar products are found below :

00008258500
00111976502
0000-825-81-00
60SY4S05
M41G
670-0125
670-0127
6700152
670-0153
6700156
D258-2TS00
70-309
7

1393143-3
7-1616360-5
8000-DG2-5
911361
9-1616339-5
PJF11N
GDA12HA
GDA12SA
GDA12SD
GDA16HD
GDA22HA

GDA95A
GDA95D
GFX20
PT08QN
PT 1/8 D = 3.2
GUA1
GUA2-11
GUA4-04
GUA4-31
GUM5R
GUR-120
GUR-24
GUR-240

GUR-277
GURX-277
GUW12
GUW95
GUZ63L
R99-11
FOR MY(NAMEPLATE)
D52PR2T
RES100K
1310H-HDC
1390H-1ST

1393824-3
1390H-2PC
1410-2SM
6000-2SM
6000-2SM</td