



## Schneider Electric Relays


200 N. Martingale Rd., Suite 1000

Schaumburg, IL 60173

Phone: 847-441-2540 • Fax: 847-881-0741

E-Mail: [relays@schneider-electric.com](mailto:relays@schneider-electric.com) • Web site: [www.serelays.com](http://www.serelays.com)

ITEM # 784XDXM4L-120A, 784 ICE CUBE RELAYS / 4PDT, 15 AMP RATING

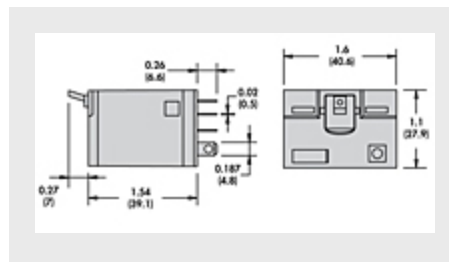

[SPECIFICATIONS](#) | [COIL CHARACTERISTICS](#) | [PERFORMANCE CHARACTERISTICS](#) | [ENVIRONMENT](#) | [PRODUCT CERTIFICATIONS](#)

Specifications	
Check Inventory	<a href="#">Check Distributor Inventory</a>
Status	Standard
Terminal Style	Plug-in
Contact Configuration	4PDT
Thermal (Carrying) Current	15 A
Coil Resistance (Ohms)	2100 Ohm
Load Type	Standard
Contact Materials	Silver Alloy
Maximum Switching Voltages	IEC: 250 VAC UL/CSA: 300 VAC
Switching Current at Voltage (AC, Resistive)	CSA: 15 A at 150 VAC 50/60 Hz (30A max. total) UL: 15 A at 277 VAC 50/60 Hz
Switching Current at Voltage (DC, Resistive)	IEC: 15 A at 28 VDC UL: 15A at 28 VDC

<b>Switching Current at Voltage (HP)</b>	1 at 277 VAC hp 1/2 at 120 VAC hp
--	--------------------------------------

<b>Pilot Duty</b>	B300
-------------------	------

<b>Minimum Switching Requirement</b>	10 mA at 17 VDC
--------------------------------------	-----------------

<b>Cover Options</b>	Full Featured
----------------------	---------------

<b>Features</b>	Locking push button, Mechanical flag indicator, Removable ID tag, Bi-polar LED
-----------------	--

#### California Proposition 65 Warning



**WARNING:** This product can expose you to chemicals including:  
**Substance 1:** Nickel compounds, which is known to the State of California to cause cancer.

**Substance 2:** DIDP, which is known to the State of California to cause birth defects or other reproductive harm.

For more information go to [www.p65warnings.ca.gov](http://www.p65warnings.ca.gov)

#### Coil Characteristics

<b>Coil Voltage</b>	120 VAC 50/60 Hz
---------------------	------------------

<b>Operating Range - % of Nominal (AC)</b>	85 to 110 %
--	-------------

<b>Operating Range - % of Nominal (DC)</b>	80 to 110 %
--	-------------

<b>Average Consumption (AC / VA)</b>	2.50 VA
--------------------------------------	---------

<b>Average Consumption (DC / W)</b>	1.60 W
-------------------------------------	--------

<b>Drop-out Voltage Threshold (AC)</b>	15 %
--	------

<b>Drop-out Voltage Threshold (DC)</b>	10 %
--	------

#### Performance Characteristics

<b>Electrical Life (UL508), Operations at Rated Current (Resistive)</b>	100000
---	--------

<b>Mechanical Life, Unpowered</b>	10000000
-----------------------------------	----------

<b>Operating Time (Response Time)</b>	20 ms
---------------------------------------	-------

<b>Dielectric Strength - Between Coil and Contact (AC)</b>	2000 V(rms)
--	-------------

<b>Dielectric Strength - Between Poles (AC)</b>	2000 V(rms)
---	-------------

#### Environment

<b>Vibration Resistance - Operational</b>	±1 mm (10-35 Hz) and 3 gn (35-150 Hz)
---	---------------------------------------

<b>Shock Resistance</b>	15 g-n
-------------------------	--------

<b>Degree of Protection</b>	IP 40
-----------------------------	-------

<b>Weight</b>	80 g 2.82 oz
---------------	-----------------

**Product Certifications** -

<b>Agency Approvals</b>	CSA (44087) UL (E164862) CE RoHs
-------------------------	---

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [General Purpose Relays](#) category:*

*Click to view products by [Schneider](#) manufacturer:*

Other Similar products are found below :

[PCN-105D3MH,000](#) [59641F200](#) [LY1SAC110120](#) [5X827E](#) [5X837F](#) [5X840F](#) [5X842F](#) [5X848E](#) [LY2N-AC120](#) [LY2S-AC220/240](#) [LY2-US-AC120](#) [LY3-US-AC120](#) [LY4F-UA-DC12](#) [LY4F-UA-DC24](#) [LY4F-US-AC120](#) [LY4F-US-AC240](#) [LY4F-US-DC24](#) [LY4F-VD-AC110](#) [LYQ20DC12](#) [M115C60](#) [M115N010](#) [M115N0150](#) [6031007G](#) [603-12D](#) [61211T0B4](#) [61212T400](#) [61222Q400](#) [61243B600](#) [61243C500](#) [61243Q400](#) [61311BOA2](#) [61311BOA6](#) [61311BOA8](#) [61311C0A2](#) [61311COA1](#) [61311COA6](#) [61311F0A2](#) [61311QOA1](#) [61311QOA4](#) [61311T0D6](#) [61311TOA6](#) [61311TOA7](#) [61311TOB3](#) [61311TOB4](#) [61311U0A6](#) [61312Q600](#) [61312T400](#) [61312T600](#) [61313U200](#) [61313U400](#)