



Schneider Electric Relays


200 N. Martingale Rd., Suite 1000

Schaumburg, IL 60173

Phone: 847-441-2540 • Fax: 847-881-0741

E-Mail: relays@schneider-electric.com • Web site: www.serelays.com

ITEM # 788XBXR69C-120A, 788 POWER RELAYS / DPDT, 10 AMP RATING

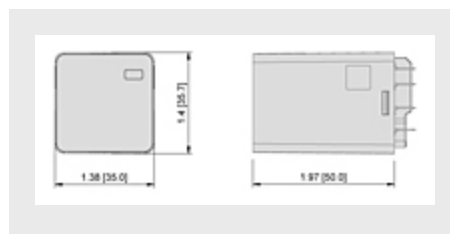

[SPECIFICATIONS](#) | [COIL CHARACTERISTICS](#) | [PERFORMANCE CHARACTERISTICS](#) | [ENVIRONMENT](#) | [PRODUCT CERTIFICATIONS](#)

Specifications	
Check Inventory	Check Distributor Inventory
Status	Standard
Legacy Part No.	788XBXR69C-120A
Terminal Style	Plug-in
Contact Configuration	DPDT
Thermal (Carrying) Current	10 A
Coil Resistance (Ohms)	1700 Ohm
Load Type	Standard
Contact Materials	Silver Alloy with Gold Flash
Maximum Switching Voltages	UL: 300 VAC/125 VDC
Switching Current at Voltage (AC, Resistive)	IEC: 10 A at 250 VAC 50/60 Hz UL: 10 A at 277 VAC 50/60 Hz
Switching Current at Voltage (DC, Resistive)	IEC: 10 A at 28 VDC UL: 10 A at 30 VDC

Switching Current at Voltage (HP)	1 at 277 VAC hp 1/3 at 120 VAC hp
--	--------------------------------------

Pilot Duty	B300
-------------------	------

Current Rating with Magnetic Blowout - Code 69	UL: 3 A at 150 VDC
---	--------------------

Minimum Switching Requirement	10 mA at 17 VDC
--------------------------------------	-----------------

Cover Options	Plain Cover
----------------------	-------------

Features	LED, Blow-out magnet, Mechanical flag indicator
-----------------	---

California Proposition 65 Warning



WARNING: This product can expose you to chemicals including:

Substance 1: Nickel compounds, which is known to the State of California to cause cancer.

Substance 2: DIDP, which is known to the State of California to cause birth defects or other reproductive harm.

For more information go to www.p65warnings.ca.gov

Coil Characteristics

Coil Voltage	120 VAC 50/60 Hz
---------------------	------------------

Operating Range - % of Nominal (AC)	85 to 110 %
--	-------------

Operating Range - % of Nominal (DC)	80 to 110 %
--	-------------

Average Consumption (AC / VA)	3 VA
--------------------------------------	------

Drop-out Voltage Threshold (AC)	15 %
--	------

Performance Characteristics

Electrical Life (UL508), Operations at Rated Current (Resistive)	100000
---	--------

Mechanical Life, Unpowered	5000000
-----------------------------------	---------

Operating Time (Response Time)	20 ms
---------------------------------------	-------

Dielectric Strength - Between Coil and Contact (AC)	2500 V(rms)
--	-------------

Dielectric Strength - Between Poles (AC)	2000 V(rms)
---	-------------

Environment

Vibration Resistance - Operational	3 g-n at 35-150 Hz
---	--------------------

Shock Resistance	10 g-n
-------------------------	--------

Degree of Protection	IP 40
-----------------------------	-------

Weight	83 g 2.93 oz
---------------	-----------------

Product Certifications -**Agency Approvals**

UL (E164862)
CSA (225619 Class 3211-07)
CE
RoHs

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [General Purpose Relays](#) category:

Click to view products by [Schneider](#) manufacturer:

Other Similar products are found below :

[PCN-105D3MH,000](#) [59641F200](#) [LY1SAC110120](#) [5X827E](#) [5X837F](#) [5X840F](#) [5X842F](#) [5X848E](#) [LY2N-AC120](#) [LY2S-AC220/240](#) [LY2-US-AC120](#) [LY3-US-AC120](#) [LY4F-UA-DC12](#) [LY4F-UA-DC24](#) [LY4F-US-AC120](#) [LY4F-US-AC240](#) [LY4F-US-DC24](#) [LY4F-VD-AC110](#) [LYQ20DC12](#) [M115C60](#) [M115N010](#) [M115N0150](#) [6031007G](#) [603-12D](#) [61211T0B4](#) [61212T400](#) [61222Q400](#) [61243B600](#) [61243C500](#) [61243Q400](#) [61311BOA2](#) [61311BOA6](#) [61311BOA8](#) [61311C0A2](#) [61311COA1](#) [61311COA6](#) [61311F0A2](#) [61311QOA1](#) [61311QOA4](#) [61311T0D6](#) [61311TOA6](#) [61311TOA7](#) [61311TOB3](#) [61311TOB4](#) [61311U0A6](#) [61312Q600](#) [61312T400](#) [61312T600](#) [61313U200](#) [61313U400](#)