

# 861SSR210-DC-4

Relay, Legacy, solid state, SPST NC, 10A, 24...280 VAC, 3...32 VDC, SCR, AC random switch



## Main

Range	Legacy
Product Type	Solid state relay
Nominal Output Current	10 A for AC
Network Number of Phases	1 phase
Mounting Support	Panel DIN rail
Output Voltage	24...280 V AC
Control Circuit Voltage	3...32 V DC

## Complementary

Holding Current	50 mA
Input Current Limits	30 mA 32 V DC typical
Switch Function	SPST
Contacts Type and Composition	NC
Protection Technology	Current limiter
Protection Type	Reverse polarity protection
Tightening Torque	0.8 N.m input/output
Connections Terminals	Input/output screw clamp terminal 0.00 in <sup>2</sup> (2.5 mm <sup>2</sup> ) AWG 14)
Local Signalling	Input status 1 LED green)
Switching Device	SCR output Random voltage switching
Load Current	10 A at nominal load 8 A incandescent lamp 4.5 A motor
Maximum Peak Voltage	400 V
Overload Current	24 A for 1 second
Surge Current	500 A 1 cycle
Must Release Voltage	1 V
Voltage Drop	<1.6 V peak AC <1.25 V on-state AC
Thermal Resistance	0.66 °C/W
Maximum I <sup>2</sup> t for fusing	1250 A <sup>2</sup> .s 8.3 ms
Leakage Current	6 mA at off-state 240 V AC
DV/dt	200 V/μs off-state at maximum rated voltage
Response Time	8.33 ms turn-off) 8.33 ms turn-on)
Dielectric Strength	4000 V between input and output 2500 V between terminals and chassis
Height	2.56 in (65 mm)
Width	0.62 in (15.75 mm)
Depth	3.54 in (89.83 mm)
Product Weight	4.48 oz (127.1 g)
Device Presentation	Complete device

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

## Environment

Product Certifications	CE CSA UL
IP Degree of Protection	IP20
Ambient Air Temperature for Operation	-22...176 °F (-30...80 °C)
Ambient Air Temperature for Storage	-40...212 °F (-40...100 °C)


## Ordering and shipping details

GTIN	03606480282256
------	----------------


## Offer Sustainability

California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a>
REACH Regulation	<a href="#">REACH Declaration</a>
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) <a href="#">EU RoHS Declaration</a>
Mercury free	Yes
RoHS exemption information	<a href="#">Yes</a>
China RoHS Regulation	<a href="#">China RoHS Declaration</a>
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.

Approximate Dimensions

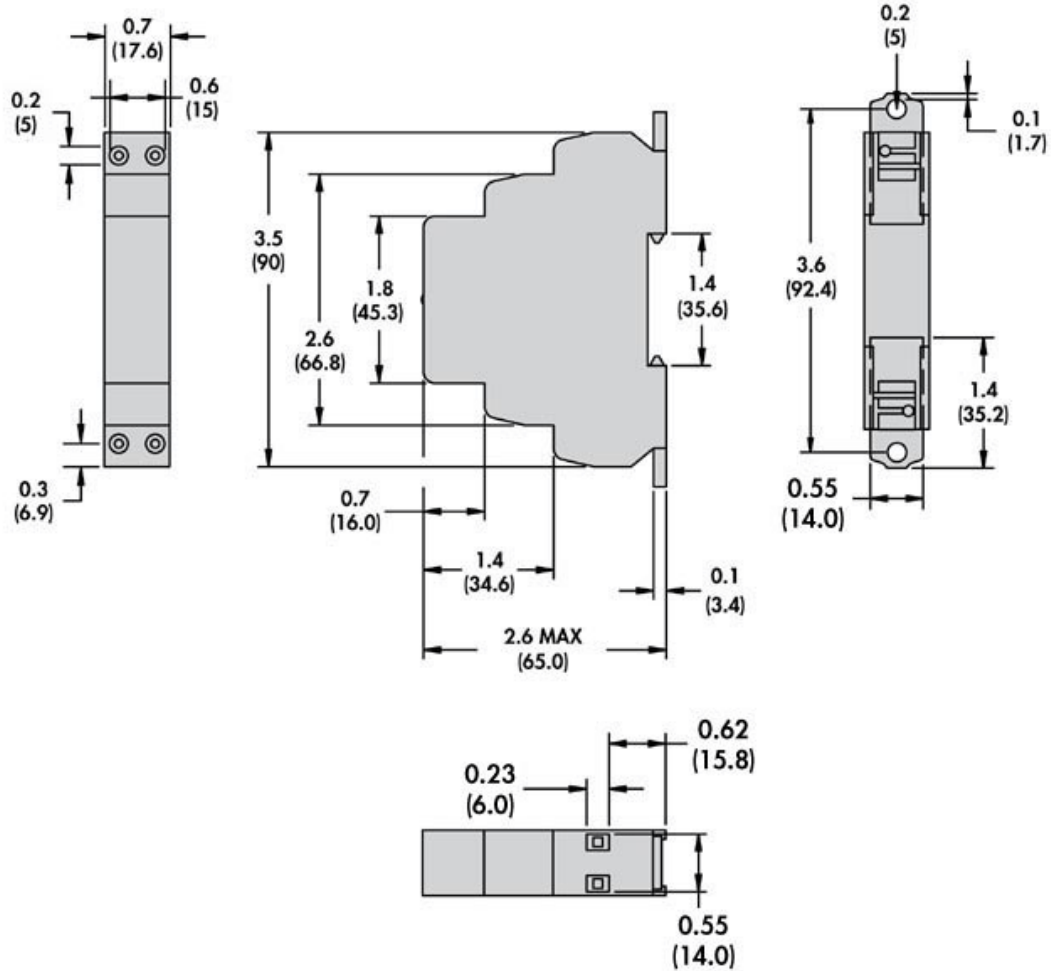

Connections and Wiring Diagrams

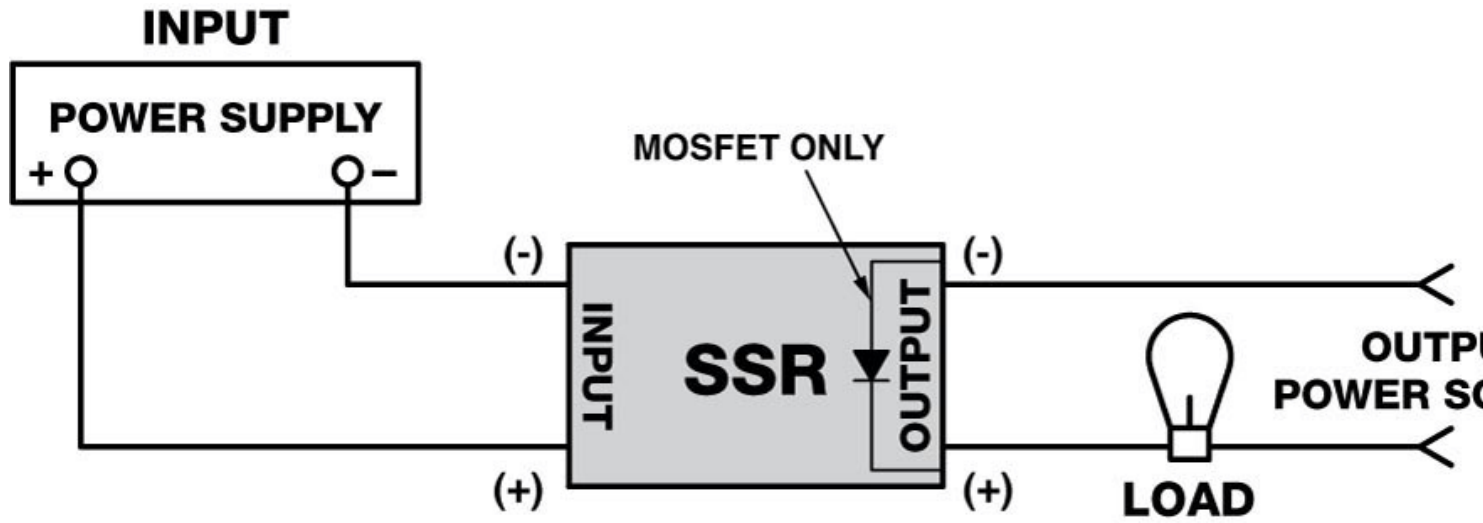

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Solid State Relays - Industrial Mount](#) category:*

*Click to view products by [Schneider](#) manufacturer:*

Other Similar products are found below :

[D2440-C](#) [H10CA4890](#) [D4875C](#) [1395831-1](#) [1616010-6](#) [BR312BY](#) [A-1326](#) [H10CA4850](#) [H12CA4890VL](#) [RA2410-D06](#) [RA2410HA06T](#)  
[D1202F](#) [D53TP50-10](#) [W230E-1-12](#) [W230T-3-12](#) [1-1617030-3](#) [1-1617033-7](#) [MS2-D2420](#) [MS2-D2430](#) [A-1440](#) [RJ1P60V50E](#) [HS501DR-](#)  
[D2425](#) [RN1F48I50](#) [70.362.1028.0](#) [7-1393030-8](#) [Z5.509.0828.0](#) [G3DZ-4B DC24](#) [G3DZ-F4B DC12](#) [2912138](#) [SSRDAC10](#) [SSR-10048RD1](#)  
[RV8S-L-A240-D24](#) [RV8S-L-A240-D6](#) [RV8S-S-A240-D6](#) [RV8S-S-A240Z-D24](#) [RV8S-S-D24-A240](#) [RV8S-S-D48-A120](#) [RN1F12V50](#)  
[RJ1P60I30E](#) [RJ1P60V30E](#) [SO967860](#) [SMT8628521](#) [SO869970](#) [SOD867180](#) [SAL961360](#) [SO867970](#) [SOB863860](#) [SOB867640](#) [G3PH-](#)  
[5150B DC5-24](#) [G3PH-2075B DC5-24](#)