

Main

Range of product	Phaseo Economic
Product or component type	Safety and isolation transformer
Rated power in VA	100 VA
Input voltage	230 V AC phase to phase, terminal(s): L1-L2 230 V AC single phase, terminal(s): N-L1
Output voltage	24 V AC
Secondary winding	Single
Protective cover	Without
Ambient air temperature for operation	-20...40 °C

Complementary

Input voltage limits	207...253 V
Network frequency limits	47...63 Hz
Input voltage tolerance	+/- 15 V
Efficiency	83 %
Power dissipation in W	20.5 W
Voltage variation at nominal load	9.25 % at 230 V
Output sustained overvoltage	0,102 (no load, hot state)
Voltage drop at rated load	11.04 %
No load losses	6.7 W
Short-circuit voltage	0,113
Output protection type	Against overload, protection technology: external Against overvoltage, protection technology: external Against short-circuits, protection technology: external
Connections - terminals	Screw type terminals for input ground connection, connection capacity: 1 x 2.5...1 x 4 mm ² AWG 14...AWG 11 Screw type terminals for input connection, connection capacity: 4 x 2.5...4 x 4 mm ² AWG 14...AWG 11 Screw type terminals for output connection, connection capacity: 2 x 2.5...2 x 4 mm ² AWG 14...AWG 11
Marking	CE

Fixing mode	By 4 screws, screw(s) Ø = 5 mm on horizontal panel with derating to 90 %, operating position: horizontal By 4 screws, screw(s) Ø = 5 mm on vertical panel By 4 screws, screw(s) Ø = 5 mm on vertical panel, operating position: vertical By clips (with mounting plate) on 35 mm symmetrical DIN rail
Operating altitude	3000 m
Electrical insulation class	Class B
Product weight	1.9 kg


Environment

Product certifications	EAC
IP degree of protection	IP20
Environmental characteristic	EMC conforming to EN 62041 Safety conforming to EN 61558-1 Safety conforming to EN 61558-2-6
Ambient air temperature for storage	-40...80 °C
Relative humidity	0...95 % during operation
Overvoltage category	Class I conforming to VDE 0106-1
Dielectric strength	3200 V between input and ground 3200 V between output and ground 5100 V between input and output

Contractual warranty

Warranty period	18 months
-----------------	-----------

Dimensions

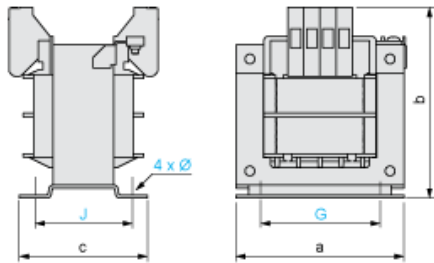


Dimensions in mm

a	b	c	G	J	Ø
85	94	88	64	67	4.8


Dimensions in in.

a	b	c	G	J	Ø
3.35	3.70	3.46	2.52	2.64	0.19


Internal Scheme



Primary Voltage Wiring



Secondary Voltage Wiring

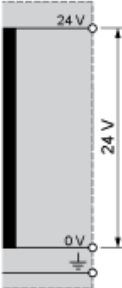

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [schneider manufacturer](#):

Other Similar products are found below :

[LU9M1](#) [7D](#) [7S](#) [7XA1](#) [FNQR2](#) [8501RS44V24](#) [8501RSD14P14V51](#) [8501XO20V03Y414](#) [9001KXRK](#) [9001SKR9P35RH25](#) [9001SKT35L31](#)
[9003K2C003GA](#) [9007AA1](#) [9007BA1](#) [9007C54D](#) [9007C62A2](#) [9007CA11](#) [9007FA3](#) [9007HA4](#) [9007HA6](#) [9007KA1](#) [9007KB11](#)
[9007MS01S0206](#) [9007MS02S0300](#) [9012GAR4](#) [9012GAW2](#) [9012GBW1](#) [9012GDW5E3](#) [9012GFW1](#) [9012GNG1](#) [9012GNG3](#) [9012GNG6](#)
[9013FHG39J69](#) [9013GHG2J30](#) [9050JCK2F30V14](#) [GV2ME04](#) [GV2ME10](#) [GV2ME14](#) [GV2ME20](#) [GV2ME32](#) [GV2P06](#) [GV2P08](#) [GV2P10](#)
[GV2P16](#) [GV2P20](#) [GV2P21](#) [GV2RT07](#) [GV2RT21](#) [GVAD1001](#) [GVAN11](#)