

### Main

Range of product	Phaseo Economic
Product or component type	Safety and isolation transformer
Rated power in VA	320 VA
Input voltage	230 V AC phase to phase, terminal(s): L1-L2 230 V AC single phase, terminal(s): N-L1
Output voltage	24 V AC
Secondary winding	Single
Protective cover	Without
Ambient air temperature for operation	-20...40 °C

### Complementary

Input voltage limits	207...253 V
Network frequency limits	47...63 Hz
Input voltage tolerance	+/- 15 V
Efficiency	89 %
Power dissipation in W	39.6 W
Voltage variation at nominal load	5.08 % at 230 V
Output sustained overvoltage	0,061 (no load, hot state)
Voltage drop at rated load	6.5 %
No load losses	16.7 W
Short-circuit voltage	0,062
Output protection type	Against overload, protection technology: external Against overvoltage, protection technology: external Against short-circuits, protection technology: external
Connections - terminals	Screw type terminals for input ground connection, connection capacity: 1 x 2.5...1 x 4 mm <sup>2</sup> AWG 14...AWG 11 Screw type terminals for input connection, connection capacity: 4 x 2.5...4 x 4 mm <sup>2</sup> AWG 14...AWG 11 Screw type terminals for output connection, connection capacity: 2 x 2.5...2 x 4 mm <sup>2</sup> AWG 14...AWG 11
Marking	CE

Fixing mode	By 4 screws, screw(s) $\varnothing = 5$ mm on horizontal panel with derating to 90 % By 4 screws, screw(s) $\varnothing = 5$ mm on vertical panel, operating position: horizontal By 4 screws, screw(s) $\varnothing = 5$ mm on vertical panel, operating position: vertical
Operating altitude	3000 m
Electrical insulation class	Class B
Product weight	4.08 kg


## Environment

Product certifications	EAC
IP degree of protection	IP20
Environmental characteristic	EMC conforming to EN 62041 Safety conforming to EN 61558-1 Safety conforming to EN 61558-2-6
Ambient air temperature for storage	-40...80 °C
Relative humidity	0...95 % during operation
Overvoltage category	Class I conforming to VDE 0106-1
Dielectric strength	3200 V between input and ground 3200 V between output and ground 5100 V between input and output

## Contractual warranty

Warranty period	18 months
-----------------	-----------

Dimensions

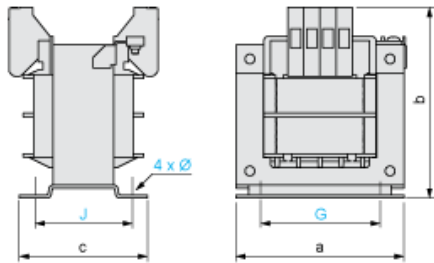


Dimensions in mm

a	b	c	G	J	Ø
121	122	92	90	75	5.8


Dimensions in in.

a	b	c	G	J	Ø
4.76	4.80	3.62	3.54	2.95	0.23

Internal Scheme



Primary Voltage Wiring



---

Secondary Voltage Wiring

---



## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [schneider manufacturer](#):*

Other Similar products are found below :

[LU9M1](#) [7D](#) [7S](#) [7XA1](#) [FNQR2](#) [8501RS44V24](#) [8501RSD14P14V51](#) [8501XO20V03Y414](#) [9001KXRK](#) [9001SKR9P35RH25](#) [9001SKT35L31](#)  
[9003K2C003GA](#) [9007AA1](#) [9007BA1](#) [9007C54D](#) [9007C62A2](#) [9007CA11](#) [9007FA3](#) [9007HA4](#) [9007HA6](#) [9007KA1](#) [9007KB11](#)  
[9007MS01S0206](#) [9007MS02S0300](#) [9012GAR4](#) [9012GAW2](#) [9012GBW1](#) [9012GDW5E3](#) [9012GFW1](#) [9012GNG1](#) [9012GNG3](#) [9012GNG6](#)  
[9013FHG39J69](#) [9013GHG2J30](#) [9050JCK2F30V14](#) [GV2ME04](#) [GV2ME10](#) [GV2ME14](#) [GV2ME20](#) [GV2ME32](#) [GV2P08](#) [GV2P10](#) [GV2P16](#)  
[GV2P20](#) [GV2P21](#) [GV2RT07](#) [GV2RT21](#) [GVAN11](#) [GVAN20](#) [GZ1E02](#)