

Product availability: Stock - Normally stocked in distribution facility



## Main

|                              |                           |
|------------------------------|---------------------------|
| Range of product             | Zelio Relay               |
| Product or component type    | Socket                    |
| Contact terminal arrangement | Mixed                     |
| Product compatibility        | Plug-in relay RPM (1 C/O) |
| Device short name            | RPZ                       |

## Complementary

|  |  |
|--|--|
| [I <sub>th</sub> ] conventional free air thermal current | 15 A   |
| System Voltage   | 250 V  |
| Tightening torque  | < 0.8 N.m (M3 screw(s))<br>< 1 N.m (M3.5 screw(s))                           |
| Fixing mode  | By screw mounting on panel<br>Clip-on mounting on 35 mm symmetrical DIN rail |
| Product weight   | 0.07 lb(US) (0.031 kg)   |

## Environment

|                                       |  |
|---------------------------------------|--|
| Connections - terminals               | Contact terminal - screw clamp terminals, 2 wires solid cable without cable end 0.5...4 mm <sup>2</sup> / AWG 20...AWG 12<br>Contact terminal - screw clamp terminals, 1 wire solid cable without cable end 0.5...4 mm <sup>2</sup> / AWG 20...AWG 12<br>Contact terminal - screw clamp terminals, 2 wires flexible cable with cable end 0.5...2.5 mm <sup>2</sup> / AWG 20...AWG 14<br>Contact terminal - screw clamp terminals, 1 wire flexible cable with cable end 0.5...2.5 mm <sup>2</sup> / AWG 20...AWG 14<br>Coil terminal - screw clamp terminals, 2 wires solid cable without cable end 0.5...2.5 mm <sup>2</sup> / AWG 20...AWG 14<br>Coil terminal - screw clamp terminals, 1 wire solid cable without cable end 0.5...2.5 mm <sup>2</sup> / AWG 20...AWG 14<br>Coil terminal - screw clamp terminals, 2 wires flexible cable with cable end 0.5...1.5 mm <sup>2</sup> / AWG 20...AWG 16<br>Coil terminal - screw clamp terminals, 1 wire flexible cable with cable end 0.5...1.5 mm <sup>2</sup> / AWG 20...AWG 16 |
| Standards                             | CSA C22.2 No 14<br>IEC 61984<br>UL 508   |
| Product certifications                | CSA<br>UL<br>REACH<br>CE<br>RoHS<br>China RoHS<br>EAC  |
| Ambient air temperature for storage   | -40...185 °F (-40...85 °C)   |
| Ambient air temperature for operation | -40...131 °F (-40...55 °C)   |
| IP degree of protection               | IP20 conforming to EN/IEC 60529  |
| Dielectric strength                   | 2500 V   |

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

### Ordering and shipping details

|                       |  |
|-----------------------|--|
| Category              | 21128 - ZELIO ICE CUBE RELAY ACCESSORIES |
| Discount Schedule     | CP2                                      |
| GTIN                  | 00785901573265                           |
| Nbr. of units in pkg. | 10                                       |
| Package weight(Lbs)   | 8.999999999999997E-2                     |
| Returnability         | Y  |
| Country of origin     | CN                                       |


### Offer Sustainability

|                           |  |
|---------------------------|--|
| California proposition 65 | WARNING: This product can expose you to chemicals including:   |
| ----- Substance 1         | Nickel compounds, which is known to the State of California to cause cancer, and   |
| ----- Substance 2         | Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. |
| ----- More information    | For more information go to <a href="http://www.p65warnings.ca.gov">www.p65warnings.ca.gov</a>                              |

### Contractual warranty

|                 |           |
|-----------------|-----------|
| Warranty period | 18 months |
|-----------------|-----------|

Dimensions

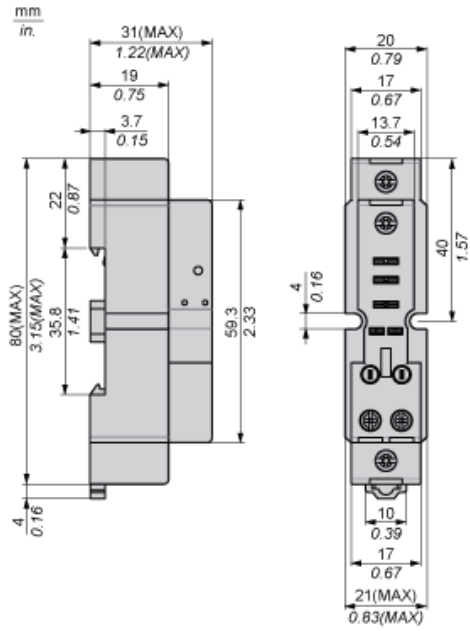



## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Relay Sockets & Fixings](#) category:*

*Click to view products by [Schneider](#) manufacturer:*

Other Similar products are found below :

[00008258500](#) [00111976502](#) [0000-825-81-00](#) [60SY4S05](#) [M41G](#) [670-0125](#) [670-0127](#) [6700152](#) [670-0153](#) [6700156](#) [D258-2TS00](#) [70-309](#) [7-1393143-3](#) [7-1616360-5](#) [8000-DG2-5](#) [911361](#) [9-1616339-5](#) [PJF11N](#) [GDA12HA](#) [GDA12HD](#) [GDA12SA](#) [GDA12SD](#) [GDA16HD](#) [GDA22HA](#) [GDA95A](#) [GDA95D](#) [GFX20](#) [PT08QN](#) [PT 1/8 D = 3.2](#) [GUA1](#) [GUA2-11](#) [GUA4-04](#) [GUA4-31](#) [GUM5R](#) [GUR-120](#) [GUR-24](#) [GUR-240](#) [GUR-277](#) [GURX-277](#) [GUW12](#) [GUW95](#) [GUZ63L](#) [R99-11 FOR MY\(NAMEPLATE\)](#) [D52PR2T](#) [RES100K](#) [1310H-HDC](#) [1390H-1ST](#) [1393824-3](#) [1390H-2PC](#) [1410-2SM](#)