




Product availability: Non-Stock - Not normally stocked in distribution facility

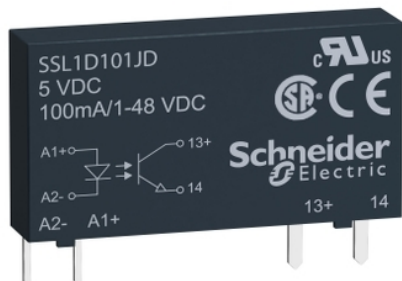

Main

| | |
|---------------------------|-------------------|
| Range of product | Zelio Relay |
| Product or component type | Solid state relay |
| Device short name | SSL |
| Phase | 1 phase |

Complementary

| | |
|---------------------------------|-------------------------------------|
| Mounting support | Socket |
| Line Rated Current | 0.1 A |
| Output voltage | 1...48 V DC |
| [Uc] control circuit voltage | 3...12 V DC |
| Contacts type and configuration | 1 NO |
| Capacitance unbalance | 1.5 pF input/output |
| Minimum switching voltage | 3 V DC turn-on |
| Maximum switching voltage | 1 V DC turn-off |
| Input current limits | 4 mA |
| Input impedance | 1250 Ohm |
| Solid state output type | Transistor output DC switching |
| Load current | 0.001...0.1 A |
| Absolute maximum voltage | 60 V DC |
| Maximum operating frequency | 500 Hz |
| Surge current | 0.3 A 10 ms |
| Voltage drop | <= 1 V on-state |
| Leakage current | <= 0.001 mA off-state |
| Response time | 0.02 ms turn-on 0.13 ms turn-off |
| Overvoltage category | III |
| Width | 0.2 in (5 mm) |
| Height | 1.1 in (28 mm) |
| Depth | 0.59 in (15 mm) |
| Product weight | 0.01 lb(US) (0.0041 kg) |

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Environment

| | |
|---------------------------------------|----------------------------|
| Flame retardance | V0 conforming to UL 94 |
| Dielectric strength | 3750 V input/output |
| Pollution degree | 2 |
| Product certifications | REACH UL CSA RoHS |
| Marking | CE |
| Ambient air temperature for operation | -4...176 °F (-20...80 °C) |
| Ambient air temperature for storage | -4...185 °F (-20...85 °C) |


Ordering and shipping details

| | |
|-----------------------|-----------------------------------|
| Category | 22375 - INTERFACE MODULE(ABA,R,S) |
| Discount Schedule | CP2 |
| GTIN | 00785901968184 |
| Nbr. of units in pkg. | 12 |
| Package weight(Lbs) | 0.01 |
| Returnability | N |
| Country of origin | MX |


Offer Sustainability

| | |
|----------------------------------|--|
| Sustainable offer status | Green Premium product |
| RoHS (date code: YYWW) | Compliant - since 1417 - Schneider Electric declaration of conformity Schneider Electric declaration of conformity |
| REACH | Reference not containing SVHC above the threshold |
| Product environmental profile | Available |
| Product end of life instructions | Need no specific recycling operations |
| California proposition 65 | WARNING: This product can expose you to chemicals including: |
| - - - - - Substance 1 | Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. |
| - - - - - More information | For more information go to www.p65warnings.ca.gov |

Dimensions

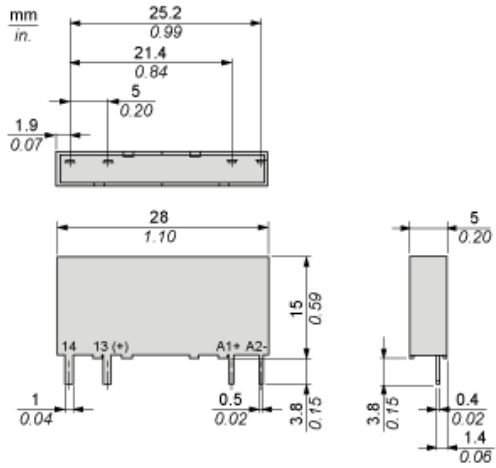

Derating Curves

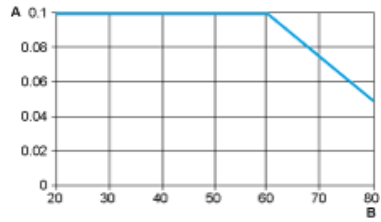

A : Load Current (Amperes)
B : Ambient Temperature (°C)

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Solid State Relays - PCB Mount](#) category:

Click to view products by [Schneider](#) manufacturer:

Other Similar products are found below :

[M86F-2W](#) [M90F-2Y](#) [G2-1A07-ST](#) [G2-1A07-TT](#) [G2-1B02-TT](#) [G2-DA06-ST](#) [923812OCAS](#) [PLA134S](#) [DS11-1005](#) [AQV212J](#)
[AQY412EHAJ](#) [EFR1200480A150](#) [901-7](#) [LCA220](#) [LCB110S](#) [1618400-5](#) [SR75-1ST](#) [AQH2213AJ](#) [AQV112KLJ](#) [AQV212AJ](#) [AQV212SXJ](#)
[AQV238AD01](#) [AQW414TS](#) [AQY221N2SYD01](#) [AQY221R2VJ](#) [AQY275AXJ](#) [AQY414SXE01](#) [G2-1A02-ST](#) [G2-1A03-ST](#) [G2-1A03-TT](#)
[G2-1A05-ST](#) [G2-1A06-TT](#) [G2-1A23-TT](#) [G2-1B01-ST](#) [G2-1B01-TT](#) [G2-1B02-ST](#) [G2-DA03-ST](#) [G2-DA03-TT](#) [G2-DA06-TT](#) [CPC1333GR](#)
[3-1617776-2](#) [CTA2425](#) [TLP3131\(F\)](#) [LBA110S](#) [LBB110S](#) [LCA110LSTR](#) [LCB126S](#) [WPPM-0626D](#) [WPPM-3526D](#) [WPPM-3588D](#)