


Item # TDR782XBXA-12D, TDR782 Time Delay Relays / DPDT, 5 Amp Rating

QUOTE

TDR782 features:

- an adjustable knob allowing users to choose from 7 timing ranges
- a large knob on top to fine tune the timing setting
- Dual LEDs which indicate when power is present at the coil and when the output is energized

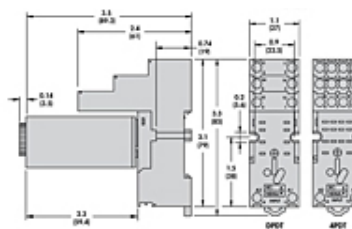

· [SPECIFICATIONS](#) · [OUTPUT CHARACTERISTICS](#) · [INPUT CHARACTERISTICS](#) · [PERFORMANCE CHARACTERISTICS](#) · [ENVIRONMENT](#) · [PRODUCT CERTIFICATIONS](#)

SPECIFICATIONS

Check Inventory	Check Distributor Inventory
Status	NCNR
Type of Device	Time Delay
Rated Current Load	5 A
Timing Range	0.1s to 100h
Number of Functions	1

OUTPUT CHARACTERISTICS

Contact Configuration	DPDT
Contact Materials	Silver Alloy
Current Rating	5 A
Maximum Permissible Current (< 0.01 s)	10 A
Indication (LED)	Amber

INPUT CHARACTERISTICS

Maximum Consumption AC	(at 120 AC) 2.6 VA (at 230 AC) 3 VA (at 24 AC) 1.7 VA
Maximum Consumption DC	(at 12 DC) 1.5 W (at 24 DC) 1.2 W
Indication (LED)	Green
Functions Available	A - On Delay (Power On)
Time Scales	7
Time Ranges Available	0.1 to 1 s 1 to 10 s 0.1 to 1 min 1 to 10 min 0.1 to 1 H 1 to 10 H 10 to 100 H
Tolerance, Mechanical Setting	5 %
Repeatability, Constant Voltage and Temperature	0.5 %
Temperature Drift	0.05 % / °C
Reset Time, Maximum	50 ms

PERFORMANCE CHARACTERISTICS

Electrical Life (UL508), Operations at Rated Current (Resistive)	100000
Mechanical Life, Unpowered	10000000
Dielectric Strength - Input to Contacts	2000 VAC

ENVIRONMENT

Ambient Air Temperature around the Device - Operation	-20 to +60 °C
Ambient Air Temperature around the Device - Storage	-40 to +70 °C
Degree of Protection	IP 50

PRODUCT CERTIFICATIONS

Agency Approvals	CE (per IEC 61810-1) UL (E191122) CSA (254373) RoHS
------------------	--

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Time Delay & Timing Relays](#) category:

Click to view products by [Schneider](#) manufacturer:

Other Similar products are found below :

[5NO30](#) [614-11B-0A2](#) [614-11B-0A3](#) [614-11B-0A4](#) [614-11B-0A6](#) [614-11B-0A8](#) [614-11C-OA1](#) [614-11C-OA2](#) [614-11C-OA5](#) [614-11Q-OA3](#) [614-11Q-OA6](#) [614-11T-OA3](#) [614-11T-OA6](#) [614-11T-OA7](#) [614-12B-4A1](#) [614-12C-400](#) [614-12Q-400](#) [614-12T-600](#) [614-22T-4A1](#) [614-43B-400](#) [614-43C-100](#) [614-43F-200](#) [614-43Q-0A2](#) [614-43Q-100](#) [614-43Q-600](#) [614-43T-0A9](#) [614-43T-600](#) [614-43U-400](#) [614-43U-4A1](#) [614-43U-6A2](#) [615-21T-200](#) [655-11T-100](#) [655-11U-500](#) [655-12T-300](#) [655-22T-400](#) [655-22T-600](#) [CUA-41-30001](#) [CUA-41-30030](#) [CUA-41-70180](#) [CUA-41-71038](#) [CUA-42-30005](#) [CUA-42-30010](#) [CUA-42-30120](#) [CUA-42-70120](#) [CUA-99-72502](#) [CUC-41-30030](#) [CUF-42-30010](#) [CUH-41-31006](#) [7012AFX](#) [7012GD](#)