


Product availability: Stock - Normally stocked in distribution facility

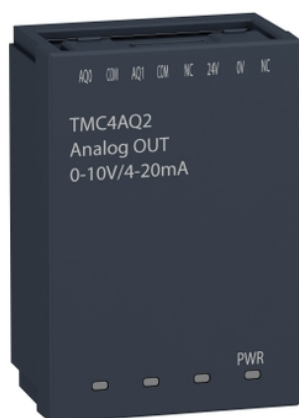

Main

Range of product	Modicon M241
Product or component type	Analogue output cartridge
Product compatibility	Modicon M241C

Complementary

Analogue output number	2
Analogue output type	Current (4...20 mA) Voltage (0...10 V)
Analogue output resolution	16 bits
LSB value	1 mV voltage, output range: 0...10 V 2 µA current, output range: 4...20 mA
Load type	Resistive
Load impedance ohmic	<= 500 Ohm (current) >= 2 kOhm (voltage)
Conversion time	10 ms + 1 controller cycle time
Stabilisation time	10 ms
Absolute accuracy error	+/- 0.2 % of full scale 25 °C
Temperature drift	+/- 0.006 %FS/°C
Repeat accuracy	+/- 0.5 %FS
Non-linearity	+/- 0.05 %FS
Output ripple	+/- 20 mV
Cross talk	80 dB
Type of cable	Twisted shielded pairs cable
Electrical connection	1 spring terminal block (pitch 3.81 mm) 1.5 mm ² 1 for outputs and supply
Cable distance between devices	Twisted shielded pairs cable: 30 m for input
Insulation	Non-insulated between outputs Between output and internal logic 500 V DC
Supply voltage limits	20.4...28.8 V
Local signalling	1 LED green PWR
Height	1.97 in (50 mm)
Depth	0.83 in (21 mm)
Width	1.34 in (34 mm)
Product weight	0.12 lb(US) (0.055 kg)

Environment


Immunity to microbreaks	10 ms
-------------------------	-------

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Ordering and shipping details

Category	22533 - M2XX PLC & ACCESSORIES
Discount Schedule	MSX
GTIN	00785901329442
Nbr. of units in pkg.	1
Package weight(Lbs)	0.14000000000000001
Returnability	Y
Country of origin	ID

Offer Sustainability

Sustainable offer status	Green Premium product
RoHS (date code: YYWW)	Compliant - since 1350 - Schneider Electric declaration of conformity  Schneider Electric declaration of conformity
REACH	Reference not containing SVHC above the threshold
Product environmental profile	Available
Product end of life instructions	Available
California proposition 65	WARNING: This product can expose you to chemicals including:
----- Substance 1	Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm.
----- More information	For more information go to www.p65warnings.ca.gov

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [I/O Modules](#) category:

Click to view products by [Schneider](#) manufacturer:

Other Similar products are found below :

[70L-IDC5S](#) [70L-OAC-L](#) [70Z3289-4](#) [G21960000700](#) [G21960002700](#) [G34960002700](#) [G88104401](#) [OACU](#) [C4SWOUT](#) [PB16H](#)
[G34960001700](#) [G3TA-OA101SZ-1](#) [DC24](#) [G77-S](#) [G78-16-E](#) [5607189](#) [DA5](#) [ODC-24A](#) [IDC5P](#) [FC6A-N16B1](#) [6421](#) [FC6A-N32B3](#)
[70MRCQ32-HL](#) [G3TAOD201SDC24](#) [C200H-LK201-V1](#) [G3TA-OA202SZ-US](#) [DC12](#) [GT1-OD16](#) [GT1-AD04CST](#) [B7AM-6BS](#) [70GRCQ24-](#)
[HS](#) [6422](#) [84110410](#) [GT1-OD16MX](#) [G7VC-OC16-B7](#) [70MRCK24-DIN](#) [6202](#) [6402](#) [PI/NI-2D/24](#) [FC6A-J2C1](#) [FC6A-KC1C](#) [FC6A-R081](#)
[FC6A-J8CU1](#) [GP32900003700](#) [641-480-5022](#) [PB16H](#) [84145010](#) [84110210](#) [FRUSB1601](#) [PCL-720+-BE](#) [FRRJ451601](#) [AP24MX3DB25F](#)