



Main

Range of Product	ConneXium
Product or Component Type	Ethernet Modbus gateway/router
Product destination	All products compatible with Modbus standard
Concept	Transparent Ready
Web server	Class B10
[Us] rated supply voltage	24 V DC

Complementary

Web services	Via predefined web pages : diagnostic on Ethernet and Modbus links Predefined web pages Access to connected products list, reading of Modbus devices registers
Communication Service	SNMP agent, device administration with a SNMP manager Read/Write Modbus registers of connected devices Miniature firewall on-board (IP address filtering) and password protection BOOTP protocol, FDR client
Supply	Power supply device PoE IEEE 802.3af
Integrated connection type	Ethernet TCP/IP RJ45 10/100 Mbps 1 twisted pair Serial link 5-way removable terminal block Modbus RTU and ASCII RS485 57.6 kbps Serial link micro switches Modbus RTU and ASCII RS485 57.6 kbps Serial link RJ45 RS232 38.4 kbps
Maximum Number of Connected Devices	Modbus serial link <32
Port Ethernet	10BASE-T/100BASE-TX
Mounting Support	Symmetrical DIN rail
Marking	CE
Local signalling	For serial link communication (RS485, RX, TX) 3 LEDs For Ethernet communication (LK, RX, TX, 100) 4 LEDs
Width	2.83 in (72 mm)
Height	3.19 in (81 mm)
Depth	2.99 in (76 mm)

Environment

Ambient air temperature for operation	32...140 °F (0...60 °C)
Relative humidity	5...95 % 104 °F (40 °C) without condensation
IP Degree of Protection	IP30
Standards	EN 61000-4-2/3/4/5/6/8 UL 508 CSA C22.2 No 14-M91 EN 55022 FCC class A EN 61000-6-2
Product Certifications	CUL UL

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Ordering and shipping details

Category	18225 - PLC NTRK HRDWR & PROWORX SOFTWARE
Discount Schedule	PC41
GTIN	00785901524939
Nbr. of units in pkg.	1
Package weight(Lbs)	0.72 lb(US) (0.33 kg)
Returnability	No
Country of origin	IN

Packing Units

Package 1 Height	5.51 in (140.000 mm)
Package 1 width	5.51 in (140.000 mm)
Package 1 Length	4.72 in (120.000 mm)


Offer Sustainability

EU RoHS Directive	Under investigation
-------------------	---------------------

Contractual warranty

Warranty	18 months
----------	-----------

Dimensions

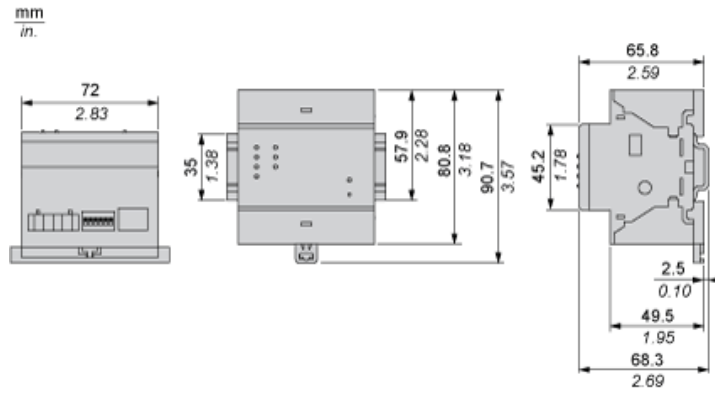

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Ethernet Modules](#) category:

Click to view products by [Schneider](#) manufacturer:

Other Similar products are found below :

[GX-OD1612](#) [TDKEZW3](#) [I350F2BLK](#) [I350T2V2](#) [V23993-USB1029A](#) [100-POE4](#) [I350T4V2BLK](#) [I350T2V2BLK](#) [FC6A-PH1](#) [X520QDA1](#)
[BCM84794A1KFSBG](#) [7506GX2](#) [FL NP PND-4TX IB](#) [FL SWITCH 2306-2SFP](#) [TC ROUTER 3002T-4G ATT](#) [X710T2L](#) [X710T4LBLK](#)
[7000-44711-7960150](#) [EKI-7708E-4F-AE](#) [2352903-2](#) [56005](#) [56006](#) [56112](#) [56117](#) [56168](#) [56200](#) [1085169](#) [RSB20-0800T1T1SAAB](#) [1005957](#)
[1005TX](#) [1006191](#) [304TX-N](#) [104TX](#) [105TX](#) [WIZ107SR_TTL](#) [106FX2-SC](#) [SFP-100FX-M-2KM-T](#) [851-10912](#) [TDKEZW5](#) [2003025](#)
[2003037](#) [2013040](#) [2013050](#) [2014120](#) [2014126](#) [2014130](#) [2014134](#) [2014140](#) [2014150](#) [2017008](#)