

Product availability: Stock - Normally stocked in distribution facility



### Main

|                           |                                      |
|---------------------------|--------------------------------------|
| Range of product          | Harmony XVB Universal                |
| Product or component type | Base unit                            |
| Component name            | XVBC                                 |
| Material                  | Glass reinforced polyamide base unit |

### Complementary

|                               |  |
|-------------------------------|--|
| Fixing mode                   | Direct or tube fixing  |
| Mounting diameter             | 2.76 in (70 mm)  |
| Product destination           | Banks without flash discharge tube unit                                      |
| Electrical connection         | 1 connector for standard input   |
| Cable entry                   | Bottom or side entry   |
| Assembly style                | Customer assembly, up to 5 units   |
| Terminals description ISO n°1 | (COM-1)PW<br>(COM-2)PW<br>(COM-3)PW<br>(COM-4)PW<br>(COM-5)PW<br>(GND)GROUND |
| Product weight                | 0.35 lb(US) (0.16 kg)  |

### Environment

|                                     |  |
|-------------------------------------|--|
| Product certifications              | CCC<br>CSA C22-2 No 14<br>GOST<br>UL 508 |
| Standards                           | EN/IEC 60947-5-1                         |
| Protective treatment                | TC                                       |
| Ambient air temperature for storage | -40...158 °F (-40...70 °C)               |
| NEMA degree of protection           | NEMA 4X indoor UL 508                    |

### Ordering and shipping details

|                       |                         |
|-----------------------|-------------------------|
| Category              | 22611 - XVB-STACKLIGHTS |
| Discount Schedule     | XV                      |
| GTIN                  | 00785901845034          |
| Nbr. of units in pkg. | 1                       |
| Package weight(Lbs)   | 0.37                    |
| Returnability         | Y                       |
| Country of origin     | ID                      |

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

## Offer Sustainability

|                           |  |
|---------------------------|--|
| California proposition 65 | WARNING: This product can expose you to chemicals including:   |
| ----- Substance 1         | Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. |
| ----- More information    | For more information go to <a href="http://www.p65warnings.ca.gov">www.p65warnings.ca.gov</a>                                    |


## Contractual warranty

|                 |           |
|-----------------|-----------|
| Warranty period | 18 months |
|-----------------|-----------|

Indicator Bank with "Flash" Discharge Tube Unit

Dimensions

Below drawing shows the minimum configuration of the product. Select the number of stages according to the product characteristics in order to get b dimension.

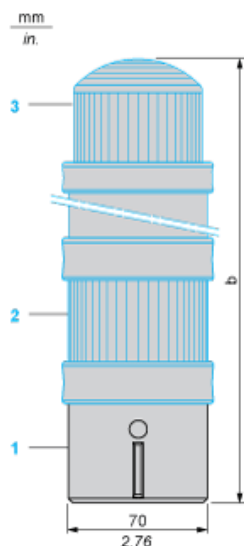

- (1) Base unit
- (2) Illuminated or audible signalling unit XVBC..., to be ordered separately
- (3) "Flash" unit XVBC..., to be ordered separately


| Number of illuminated or audible signalling units other than "flash" tube | b in mm | b in in. |
|---|---------|----------|
| 1   | 295     | 11.61    |
| 2   | 358     | 14.09    |
| 3   | 421     | 16.57    |
| 4   | 484     | 19.06    |

---

Base Unit for Indicator Banks

---

Panel Cut-out for Direct Fixing

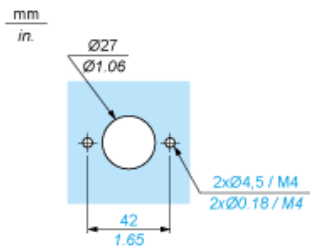


---

## Illuminated Beacon

---

### Wiring Diagram



## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [LED Lighting Fixtures](#) category:*

*Click to view products by [Schneider](#) manufacturer:*

Other Similar products are found below :

[1301080067](#) [XVEC21P](#) [XVEC2B7](#) [2576960000](#) [113163000-00662717](#) [113472000-00691461](#) [XVBC2B3](#) [XVBC2B7](#) [XVBC4B4](#) [XVBC4B5](#)  
[XVBC4B6](#) [XVBC4M3](#) [XVBC4M4](#) [XVBC4M5](#) [XVBC4M8](#) [XVBZ01](#) [XVBZ03A](#) [XVBZ04](#) [E35600](#) [NB-RLAMP01-LED](#) [FLK7LED](#)  
[XVBZ04A](#) [XVBC4M7](#) [XVBC4M6](#) [XVBC4B3](#) [XVBC2B8](#) [2700127](#) [2702933](#) [2702477](#) [2403122](#) [2403121](#) [2402991](#) [89406068](#) [148-00076](#)  
[113261000-00641180](#) [190007019-00014904](#) [226108019-00610754](#) [4823](#) [4824](#) [4868](#) [112887037-00076065](#) [113021000-00564565](#)  
[113473000-00704968](#) [NB-RLAMP01](#) [112577000-00539774](#) [113458000-00668976](#) [E35500](#) [408001403-00671626](#) [SL7/4-FW](#) [LML-6TER-](#)  
[CAB](#)