

Control and signaling units Ø 8 and 12

Harmony® XVL LED pilot lights

Catalog

January 2015



How can you fit a 6000-page catalog in your pocket ?


Schneider Electric provides you with the complete set of industrial automation catalogs all on a handy USB key for PC or in an application for tablets



Digi-Cat, a handy USB key for PC



- > Convenient to carry
- > Always up-to-date
- > Environmentally friendly
- > Easy-to-share format

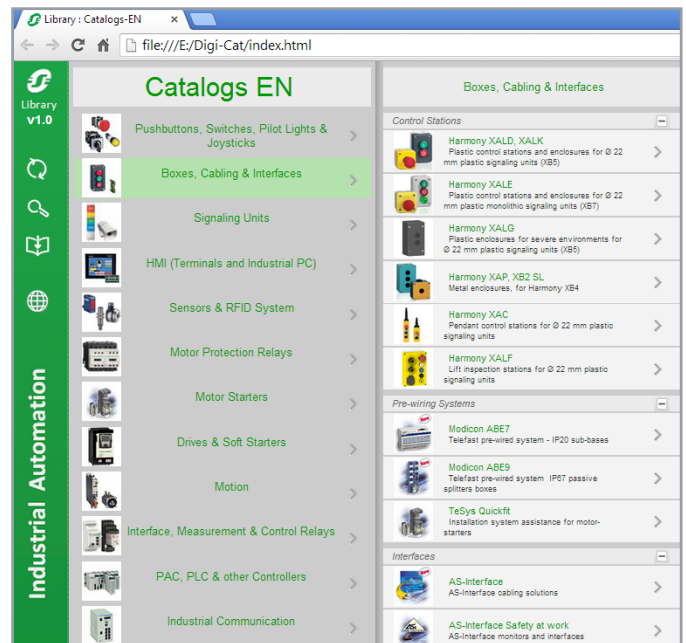

Contact your local representative to get your own Digi-Cat



e-Library, the app for tablets


If you have an iPad®:

- > Go to the App Store and search for e-Library
- > or scan the QR code



If you have an Android tablet:

- > Go to the Google Play Store™ and search for eLibrary
- > or scan the QR code

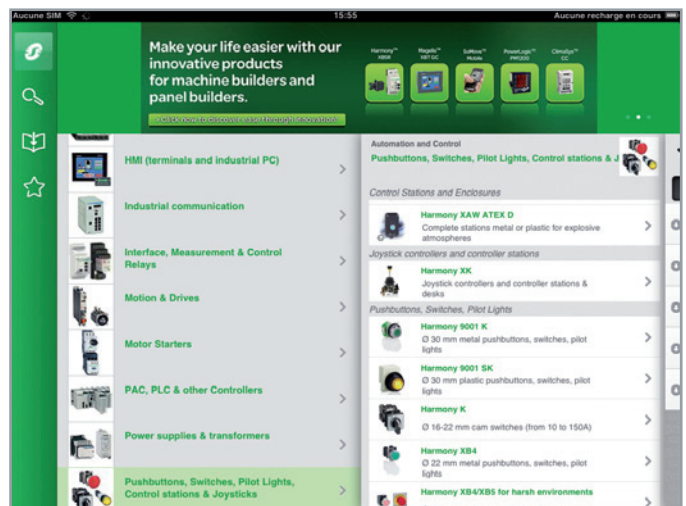

General contents

Harmony® XVL LED pilot lights











Selection guide page 2

■ Presentation

□ LED pilot lights, type XVLA page 4

■ References page 5

■ Product reference index page 6

Type of products		Pilot lights	Pushbuttons, selector switches and pilot lights			Biometric switches
						
						
						
						
Description of range		<ul style="list-style-type: none"> LED pilot lights 	<ul style="list-style-type: none"> Pushbuttons Multiple-headed pushbuttons Emergency Stop pushbuttons Selector switches and key switches Illuminated pushbuttons Pilot lights 			<ul style="list-style-type: none"> Fingerprint readers 24V $\overline{\text{---}}$ Stand-alone biometric switches Stand-alone USB biometric switches USB biometric switches dedicated to Schneider HMI (1)
Features	Products	Monolithic, compact, low consumption	Complete units or sub-assemblies (body + head)			Monolithic
	Bezel	Double insulated	Double insulated (3)	Metal, chromium plated or black	Double insulated	Double insulated, dark grey
	Shape of head	Circular	Circular, square or rectangular	Circular	Circular or square	–
Drilling or cut-out for fixing		\varnothing 8 mm and \varnothing 12 mm/0.315 in. and 0.472 in.	\varnothing 16 mm/0.630 in.	\varnothing 22 mm/0.866 in.		
Degree of protection	Conforming to IEC 60529	IP 40 IP 65 with seal	IP 65	IP 66 IP 69K (Selector switches and key switches, multiple-headed pushbuttons and Emergency Stop pushbuttons with bellows)	IP 65 (control button)	
	Conforming to UL 508 and CSA C22-2 N° 14	–	Enclosure type 4, 4X and 13			Enclosure type 12
Cabling		Tags for 2.8 x 0.5 mm/0.110 x 0.020 in. connectors or threaded connector	Faston connectors Solder pins for printed circuit boards (3) Fast connector socket (4)	Spring clamp terminal connections Screw clamp terminal connections Faston connectors Connector With adaptor for printed circuit board	Cable or connectors	
Mounting	Panel thickness	1...8 mm/ 0.039...0.315 in.	1...6 mm/0.039...0.236 in.			
Type references		XVLA	XB6, XB6E	XB4	XB5	XB5S

(1) Compatible with Magelis iPC, STU, OT, GXO, GT (except GT1000 series), GK, GH, and GTO models.
 (2) Wireless and batteryless pushbutton and receiver ready-paired at the factory.



Control and signaling units

Ø 8 and 12

LED pilot lights

Presentation

This range of LED pilot lights meets the latest requirements in signaling techniques.

Applications

Due to their small size, Ø 8 and Ø 12 fixing pilot lights are particularly suitable for the following applications:

- Mounting on small control panels
- Shallow depth mounting
- Where a large number of signaling units are required on a control panel
- Low power dissipation

Advantages

LED pilot lights have many advantages:

- Very long life and low maintenance costs (bulb test procedure no longer required)
- Highly resistant to shocks, vibrations, and over voltage
- Low power consumption which, for example, allows direct compatibility with programmable controller outputs
- No sudden failures

Description and environment

■ The XVL A range features two different models:

- **XVLA1** ●● 8 mm/0.31 in. diameter pilot lights with black bezel. This version has a sealed front face (IP 40).
- **XVLA2** ●● 8 and 12 mm/0.31 and 0.47 in. diameter pilot lights with integral lens cap and covered LED. These models have sealed front faces (IP 40) and can be fitted with an additional seal to provide IP 65 protection.

■ All models comply with UL (Recognized) and CSA certifications.

Connection

■ Quick installation is assisted by:

- tag connectors suitable for soldered connections on Ø 8 mm/Ø 0.31 in. pilot lights
- threaded connectors on Ø 12 mm/Ø 0.47 in. pilot lights

■ This offers two advantages in terms of connection:

- An integral ballast resistor
- Reverse polarity protection

Control and signaling units

Ø 8 and 12

LED pilot lights



XVLA1●●

References

Pilot lights with black bezel

Description	Supply voltage ---	Color	Reference	Weight kg/lb
Ø 8 mm/Ø 0.31 in. Degree of protection: <input type="checkbox"/> IP 40 (with integral ballast resistor and reverse polarity protection diode)	5 V	Green	XVLA113	0.003/0.007
		Red	XVLA114	0.003/0.007
		Yellow	XVLA115	0.003/0.007
	12 V	Green	XVLA123	0.003/0.007
		Red	XVLA124	0.003/0.007
		Yellow	XVLA125	0.003/0.007
	24 V	Green	XVLA133	0.003/0.007
		Red	XVLA134	0.003/0.007
		Yellow	XVLA135	0.003/0.007
	48 V	Green	XVLA143	0.003/0.007
		Red	XVLA144	0.003/0.007
		Yellow	XVLA145	0.003/0.007

IP 40 version



XVLA2●●

IP 65 version



XVLA2●● + XVLZ911 (1)

Pilot lights with integral lens cap, covered LED

Description	Supply voltage ---	Color	Reference	Weight kg/lb
Ø 8 mm/Ø 0.31 in. Degree of protection: <input type="checkbox"/> IP 40 <input type="checkbox"/> IP 65 with seal XVLZ911 (1) (with integral ballast resistor and reverse polarity protection diode)	5 V	Green	XVLA213	0.003/0.007
		Red	XVLA214	0.003/0.007
		Yellow	XVLA215	0.003/0.007
	12 V	Green	XVLA223	0.003/0.007
		Red	XVLA224	0.003/0.007
		Yellow	XVLA225	0.003/0.007
	24 V	Green	XVLA233	0.003/0.007
		Red	XVLA234	0.003/0.007
		Yellow	XVLA235	0.003/0.007
	48 V	Green	XVLA243	0.003/0.007
		Red	XVLA244	0.003/0.007
		Yellow	XVLA245	0.003/0.007
Ø 12 mm/Ø 0.47 in. Degree of protection: <input type="checkbox"/> IP 40 <input type="checkbox"/> IP 65 with seal XVLZ912 (1) (with integral ballast resistor and reverse polarity protection diode)	5 V	Green	XVLA313	0.007/0.015
		Red	XVLA314	0.007/0.015
		Yellow	XVLA315	0.007/0.015
	12 V	Green	XVLA323	0.007/0.015
		Red	XVLA324	0.007/0.015
		Yellow	XVLA325	0.007/0.015
	24 V	Green	XVLA333	0.007/0.015
		Red	XVLA334	0.007/0.015
		Yellow	XVLA335	0.007/0.015
	48 V	Green	XVLA343	0.007/0.015
		Red	XVLA344	0.007/0.015
		Yellow	XVLA345	0.007/0.015

IP 40 version



XVLA3●●

IP 65 version




XVLA3●● + XVLZ912 (1)

Separate components

Description	For use with	Sold in lots of	Unit reference	Weight kg/lb
Tightening tools (sold singly)	Ø 8 mm/Ø 0.31 in. pilot lights	1	XVLX08	0.015/0.033
	Ø 12 mm/Ø 0.47 in. pilot lights	1	XVLX12	0.030/0.661
Seals (IP 65)	Ø 8 mm/Ø 0.31 in. pilot lights	10	XVLZ911	0.001/0.002
	Ø 12 mm/Ø 0.47 in. pilot lights	10	XVLZ912	0.001/0.002
Other versions	Ø 8 and Ø 12 mm/Ø 0.31 and Ø 0.47 in. LED pilot lights, without resistor, without reverse polarity protection diode (max. direct current: 30 mA ---) Please consult our Customer Care Centre.			

(1) To be ordered separately.



XVLX●●



XVLZ91●

X	
XVLA113	5
XVLA114	5
XVLA115	5
XVLA123	5
XVLA124	5
XVLA125	5
XVLA133	5
XVLA134	5
XVLA135	5
XVLA143	5
XVLA144	5
XVLA145	5
XVLA213	5
XVLA214	5
XVLA215	5
XVLA223	5
XVLA224	5
XVLA225	5
XVLA233	5
XVLA234	5
XVLA235	5
XVLA243	5
XVLA244	5
XVLA245	5
XVLA313	5
XVLA314	5
XVLA315	5
XVLA323	5
XVLA324	5
XVLA325	5
XVLA333	5
XVLA334	5
XVLA335	5
XVLA343	5
XVLA344	5
XVLA345	5
XVLX08	5
XVLX12	5
XVLZ911	5
XVLZ912	5

Harmony Innovation



Schneider Electric Industries SAS

Head Office
35, rue Joseph Monier
F-92500 Rueil-Malmaison
France

www.schneider-electric.com/control

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Design: Schneider Electric
Photos: Schneider Electric

DIA5ED2130605EN

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [LED Panel Mount Indicators](#) category:

Click to view products by [Schneider](#) manufacturer:

Other Similar products are found below :

[607-1312-310F](#) [607-3232-140F](#) [6091M1-24V](#) [6091M5-24V](#) [6091M7-24V](#) [6091QM1-12V](#) [821-0331-503](#) [FL2870C8R](#) [FL2950WL7B](#)
[FL589WL8R](#) [Q6P3BXXB12E](#) [H8630FBBA3](#) [MPC5ADW6.0](#) [DX1091GN](#) [DX1118GN](#) [NL177WL3G](#) [NL276C3G](#) [NL2950BWL3G](#)
[NL2950CWL2R](#) [NL589WL2R](#) [NL67C3G](#) [NL67C3R](#) [2191L1-12V](#) [PB22BM41K](#) [PB22SIM40Y](#) [PB22SIOL0RG](#) [PB22SKRS31KC](#)
[PB22SPPM41R](#) [PB22SPPM61R](#) [LE177C5B](#) [LE2821H5G](#) [LH1048BSWL3702](#) [LH1048BWL3702](#) [LH382A](#) [LHM62B](#) [SSI-LXH387USBD-](#)
[150](#) [SSI-LXH9ZIC40587](#) [SSI-LXR4815SOD-150](#) [SSP-LXS110818BA](#) [FL2950BWL7R](#) [FL2950CWL7R](#) [FL2950WL7R](#) [FL2950WL8R](#)
[FL2951WL8G](#) [FL2951WL8R](#) [FL589C7R](#) [FL67C7R](#) [FL67WL8G](#) [2191QU7-24V](#) [2191U1-12V](#)