

Product data sheet

Characteristics

XZCPV11V12L5

Pre wired connectors XZ, straight female, M12, 5 pins, cable PVC 5 m



Main

| | |
|------------------------------------|----------------------------------|
| Range of Product | Telemecanique Cabling components |
| Accessory / separate part category | Cabling accessory |
| Accessory / Separate Part Type | Pre-wired connectors |
| Series name | General purpose |

Complementary

| | |
|--------------------------------|---------------------------------------|
| Electrical connection | Straight female connector M12, 5 pins |
| Cable connector fixing | Screw-on |
| Collar material | Metal |
| Status LED | Without |
| Cable length | 16.40 ft (5 m) |
| Cable outer diameter | 0.20 in (5.2 mm) |
| Cable composition | 5 x 0.34 mm ² |
| Wire insulation material | PVC |
| [Ue] rated operational voltage | 60 V AC 75 V DC |
| Line Rated Current | 3 A |
| Contact resistance | 5000 μOhm |
| Minimum insulating resistance | 1 GΩ |
| Net Weight | 0.44 lb(US) (0.201 kg) |

Environment

| | |
|---------------------------------------|-----------------------------------|
| IP Degree of Protection | IP67 IP65 |
| Product Certifications | cULus |
| Ambient air temperature for operation | -13...176 °F (-25...80 °C) static |
| Ambient Air Temperature for Storage | -13...176 °F (-25...80 °C) |

Ordering and shipping details

| | |
|-----------------------|----------------------|
| Category | 22483-MACHINE CABLES |
| Discount Schedule | DS3 |
| GTIN | 3389119621519 |
| Nbr. of units in pkg. | 1 |
| Package weight(Lbs) | 6.81 oz (193.0 g) |
| Returnability | Yes |
| Country of origin | CZ |

Packing Units

| | |
|------------------------------|------------------------|
| Unit Type of Package 1 | PCE |
| Package 1 Height | 1.18 in (3 cm) |
| Package 1 width | 6.69 in (17 cm) |
| Package 1 Length | 6.69 in (17 cm) |
| Unit Type of Package 2 | S02 |
| Number of Units in Package 2 | 20 |
| Package 2 Weight | 9.17 lb(US) (4.161 kg) |
| Package 2 Height | 5.91 in (15 cm) |
| Package 2 width | 11.81 in (30 cm) |
| Package 2 Length | 15.75 in (40 cm) |


Offer Sustainability

| | |
|----------------------------|---|
| California proposition 65 | WARNING: This product can expose you to chemicals including: Diisononyl phthalate (DINP), which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov |
| REACH Regulation | REACH Declaration |
| EU RoHS Directive | Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration |
| Mercury free | Yes |
| RoHS exemption information | Yes |

Contractual warranty

| | |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|


Dimensions

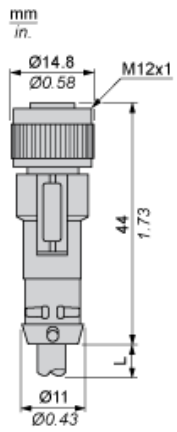

L : Length of cable

Connections and Schemes

Connectors



BU : Blue
BN : Brown
BK : Black
GY : Grey
BK/ Black / White
WH :

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Sensor Cables / Actuator Cables](#) category:

Click to view products by [Schneider](#) manufacturer:

Other Similar products are found below :

[60963](#) [60964](#) [703000D02F2002](#) [703000D02F300](#) [703001D02F0602](#) [703001D02F1201](#) [703001D02F300](#) [704000D02F120](#) [MDM21SH001F](#)
[773032K02F030](#) [802027107404-1](#) [802027213811-1](#) [804001A09M150](#) [805001A09M0502](#) [84914-0235](#) [84914-0237](#) [885030A09M010](#)
[885030A09M020](#) [8R4006A18M010](#) [8R4J30E03C3003](#) [1200650503](#) [1200651713](#) [1200660844](#) [1200660845](#) [1200661173](#) [1200680071](#)
[1200720053](#) [1200720081](#) [1200720094](#) [1200720099](#) [1200720217](#) [1200800231](#) [1200860125](#) [1200870123](#) [1200650298](#) [1200660183](#)
[1200660782](#) [1200660849](#) [1200661295](#) [1200661297](#) [1200661343](#) [1200670080](#) [1200680331](#) [1200720252](#) [1200720255](#) [1200720597](#)
[1200730184](#) [1200860344](#) [1200870359](#) [1200870643](#)