

Miniature Fuse, 6.3 x 32 mm, Quick-Acting F, Sand, 250 VAC



250 VAC · Quick-Acting F

See below:  
[Approvals and Compliances](#)

### Description

- H = High Breaking Capacity

### References

Last order date: 30.04.2021  
 We recommend for new applications [SHF 6.3x32](#)

### Weblinks

[pdf data sheet](#), [html datasheet](#), [General Product Information](#), [Distributor-Stock-Check](#), [Detailed request for product](#)

### Technical Data

Rated Voltage	250 VAC	Resistance to Vibration	acc. to IEC 60068-2-6, test Fc
Rated current	0.5 - 20A		
Breaking Capacity	1000A - 1500A		
Characteristic	Quick-Acting F		
Mounting	Fuseholder / Clip		
Admissible Ambient Air Temp.	-40°C to 85°C		
Climatic Category	40/085/21 acc. to IEC 60068-1		
Material: Tube	Glass with sand filling		
Material: Endcaps	Nickel-Plated Copper Alloy		
Unit Weight	2.51 g		
Storage Conditions	0°C to 60°C, max. 70% r.h.		
Product Marking	☐, Rated current, Rated Voltage, Characteristic, Certification marks		

### Approvals and Compliances

Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in [Details about Approvals](#)

SCHURTER products are designed for use in industrial environments. They have approvals from independent testing bodies according to national and international standards. Products with specific characteristics and requirements such as required in the automotive sector according to IATF 16949, medical technology according to ISO 13485 or in the aerospace industry can be offered exclusively with customer-specific, individual agreements by SCHURTER.






### Application standards

Application standards where the product can be used


Organization	Design	Standard	Description
	Designed for applications acc.	IEC/UL 62368-1	Audio/video, information and communication technology equipment - Part 1: Safety requirements

**Compliances**

The product complies with following Guide Lines

Identification	Details	Initiator	Description
	<a href="#">CE declaration of conformity</a>	SCHURTER AG	The CE marking declares that the product complies with the applicable requirements laid down in the harmonisation of Community legislation on its affixing in accordance with EU Regulation 765/2008.
	<a href="#">UKCA declaration of conformity</a>	SCHURTER AG	The UKCA marking declares that the product complies with the applicable requirements laid down in the British Amendment of Regulation (EC) 765/2008.
	RoHS	SCHURTER AG	Directive RoHS 2011/65/EU, Amendment (EU) 2015/863
	China RoHS	SCHURTER AG	The law SJ / T 11363-2006 (China RoHS) has been in force since 1 March 2007. It is similar to the EU directive RoHS.
	REACH	SCHURTER AG	On 1 June 2007, Regulation (EC) No 1907/2006 on the Registration, Evaluation, Authorization and Restriction of Chemicals 1 (abbreviated as "REACH") entered into force.

Dimension [mm]  32 mm

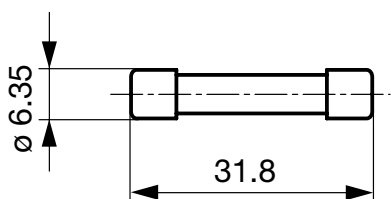


**Pre-Arcing Time**

Rated Current $I_n$	$1.5 \times I_n$ min.	$2.1 \times I_n$ max.	$2.75 \times I_n$ min.	$2.75 \times I_n$ max.	$4.0 \times I_n$ min.	$4.0 \times I_n$ max.	$10.0 \times I_n$ max.
0.5 A - 4 A	60 min	60 min	70 ms	5 s	10 ms	150 ms	10 ms
5 A - 20 A	60 min	60 min	150 ms	2 s	25 ms	200 ms	20 ms

PHFA

Time-Current-Curves

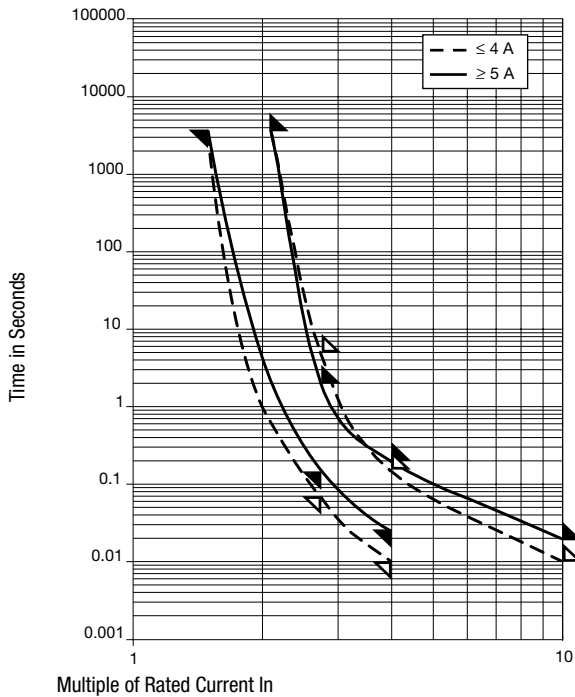

All Variants

Rated Current [A]	Rated Voltage [VAC]	Breaking Capacity	Voltage Drop 1.0 I <sub>n</sub> max. [mV]	Voltage Drop 1.0 I <sub>n</sub> typ. [mV]	Power Dissipation 1.5 I <sub>n</sub> typ. [mW]	Melting I <sup>2</sup> t 10.0 I <sub>n</sub> typ. [A <sup>2</sup> s]	Order Number
0.5	250	1)	3000	1000	3000	0.13	0001.1021
0.63	250	1)	2500	2500	3800	0.003	0001.1022
0.8	250	1)	2200	520	1200	0.06	0001.1023
1	250	1)	1900	410	1200	0.4	0001.1024
1.25	250	1)	1600	1600	5400	-	0001.1025
1.6	250	1)	1300	460	2100	1.2	0001.1026
2	250	1)	1000	340	2000	2.4	0001.1027
2.5	250	1)	700	350	2800	4.1	0001.1028
3.15	250	1)	600	270	3000	7.9	0001.1029
4	250	1)	550	270	3500	15	0001.1030
5	250	1)	500	240	3700	32	0001.1031
6.3	250	1)	450	170	4700	38	0001.1032
8	250	1)	400	250	6700	62	0001.1033
10	250	1)	350	150	5200	140	0001.1034
12.5	250	2)	300	150	7600	230	0001.1035
16	250	2)	250	130	8400	455	0001.1036
20	250	2)	250	130	11500	846	0001.1037

Most Popular.

Availability for all products can be searched real-time: <https://www.schurter.com/en/Stock-Check/Stock-Check-SCHURTER>

1) 1500 A @ 250 VAC , p.f. = 0.7 - 0.8

2) 1000 A @ 250 VAC , p.f. = 0.7 - 0.8

Packaging Unit

Small Box Pack (10 pcs.)

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Cartridge Fuses](#) category:*

*Click to view products by [Schurter](#) manufacturer:*

Other Similar products are found below :

[5TT3A-R](#) [MBO-20](#) [MDM-4/10](#) [MDQ-V-15/100](#) [MDX-1-6/10](#) [MDX-2](#) [MDX-3-2/10](#) [MDX-6-1/4](#) [FLSR-15](#) [FLSR-30](#) [FRS-1-1/4](#) [FRS-1-6/10](#) [FRS-4/10](#) [H362003](#) [ABC-2](#) [1/2A](#) [AGC-1-1/2RX](#) [AGC-15EX](#) [AGC-V-3-12-R](#) [AGY-50](#) [15019-G](#) [MSL-1-1/2](#) [MSL-1-1/4](#) [MSL-1/2](#) [MSL-1/4](#) [MSL-3](#) [MSL-3/4](#) [MSL-4](#) [MSL-5](#) [BK1/C436-2A](#) [BK1-GMA-1-6-R](#) [BK1-S505-1-R](#) [BK1-S506-3-15-R](#) [BK/MDM-15](#) [BK/MDM-3/4](#) [S501-V-10A](#) [S505-V-500MA](#) [SEF-1697-1-002](#) [301030](#) [303030](#) [FLA10](#) [FLA-4/10](#) [FLNR-5](#) [20.0M6.3X32F](#) [GGB-17-1/2](#) [301001](#)  
[301020](#) [311008](#) [313.25](#) [313.75](#)