Miniature Fuse, 5 x 20 mm, Super-Quick-Acting FF, 250 VAC



250 VAC · Super-Quick-Acting FF		See below: Approvals and Compliances			
Description - High breaking capacity - Ceramic Tube		Weblinks pdf data sheet, html datasheet, General Product Information, Distributor-Stock-Check, Detailed request for product			
Technical Data					
Rated Voltage	250 VAC				
Rated current	1.6 - 10A				
Breaking Capacity	1500A				
Characteristic	Super-Quick-Acting FF				
Mounting	Fuseholder / Clip				
Admissible Ambient Air Temp.	-40 °C to 85 °C				
Climatic Category	40/085/21 acc. to IEC 60068-1				
Material: Tube	Ceramics				
Material: Endcaps	Nickel-Plated Copper Alloy				
Unit Weight	1.19 g				
Storage Conditions	0°C to 60°C, max. 70% r.h.				
Product Marking	S, Rated current, Rated Voltage, Characteristic				

### **Approvals and Compliances**

Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in Details about Approvals

SCHURTER products are designed for use in industrial environments. They have approvals from independent testing bodies according to national and international standards. Products with specific characteristics and requirements such as required in the automotive sector according to IATF 16949, medical technology according to ISO 13485 or in the aerospace industry can be offered exclusively with customer-specific, individual agreements by SCHURTER.

### **Application standards**

Application standards where the product can be used


Organ	ization	Design	Standard	Description
<u>IEC</u>		Designed for applications acc.	IEC/UL 62368-1	Audio/video, information and communication technology equipment - Part 1: Safety requirements

### Compliances

The product complies with following Guide Lines

Identification	Details	Initiator	Description
C€	CE declaration of conformity	SCHURTER AG	The CE marking declares that the product complies with the applicable requirements laid down in the harmonisation of Community legislation on its affixing in accordance with EU Regulation 765/2008.
CA CA	UKCA declaration of conformity	SCHURTER AG	The UKCA marking declares that the product complies with the applicable requirements laid down in the British Amendment of Regulation (EC) 765/2008.
ROHS	RoHS	SCHURTER AG	Directive RoHS 2011/65/EU, Amendment (EU) 2015/863
<b>©</b>	China RoHS	SCHURTER AG	The law SJ / T 11363-2006 (China RoHS) has been in force since 1 March 2007. It is similar to the EU directive RoHS.
REACH	REACH	SCHURTER AG	On 1 June 2007, Regulation (EC) No 1907/2006 on the Registration, Evaluation, Authorization and Restriction of Chemicals 1 (abbreviated as "REACH") entered into force.


#### Dimension [mm] **-**| 20 mm



## **Pre-Arcing Time**

Rated Current In	1.2 x In min.	2.0 x In min.	2.0 x In max.	2.75 x In min.	2.75 x In max.	4.0 x In min.	4.0 x In max.	10.0 x ln max.
1.6 A - 10 A	60 min	10 ms	2 s	4 ms	50 ms	2 ms	15 ms	2 ms

### **Time-Current-Curves**

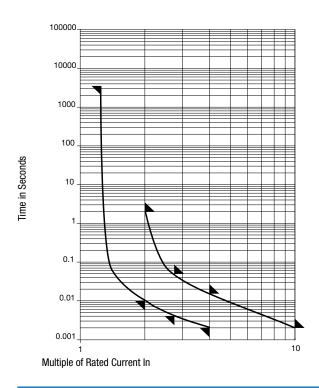

### **All Variants**

Rated Cur- rent [A]	Rated Vol- tage [VAC]	Breaking Capacity	Voltage Drop 1.0 I <sub>n</sub> max. [mV]	Voltage Drop 1.0 I <sub>n</sub> typ. [mV]	Power Dissipation 1.25 I <sub>n</sub> typ. [mW]	Melting I <sup>2</sup> t 10.0 I <sub>n</sub> typ. [A <sup>2</sup> s]	Order Number
1.6	250	1)	400	250	600	0.384	0034.0903
2	250	1)	370	200	600	0.484	0034.0904
2.5	250	1)	340	200	800	1.06	0034.0905
3.15	250	1)	310	180	1000	1.26	0034.0906
4	250	1)	280	180	1200	1.28	0034.0907
5	250	1)	250	160	1400	1.78	0034.0908
6.3	250	1)	250	170	2000	5.95	0034.0909
8	250	1)	250	190	2800	8.32	0034.0910
10	250	1)	250	160	2900	17	0034.0911

Most Popular.

Availability for all products can be searched real-time:https://www.schurter.com/en/Stock-Check/Stock-Check-SCHURTER

1) 1500 A @ 250 VAC , p.f. = 0.7 - 0.8

# **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Cartridge Fuses category:

Click to view products by Schurter manufacturer:

Other Similar products are found below:

5TT3A-R MBO-20 MDM-4/10 MDQ-V-15/100 MDX-1-6/10 MDX-2 MDX-3-2/10 MDX-6-1/4 FLSR-15 FLSR-30 FRS-1-1/4 FRS-1-6/10 FRS-4/10 H362003 ABC-2 1/2A AGC-1-1/2RX AGC-15EX AGC-V-3-12-R AGY-50 15019-G MSL-1-1/2 MSL-1-1/4 MSL-1/2 MSL-1/4 MSL-3 MSL-3/4 MSL-4 MSL-5 BK1/C436-2A BK1-GMA-1-6-R BK1-S505-1-R BK1-S506-3-15-R BK/MDM-15 BK/MDM-3/4 S501-V-10A S505-V-500MA SEF-1697-1-002 301030 303030 FLA10 FLA-4/10 FLNR-5 20.0M6.3X32F GBB-17-1/2 301001 301020 311008 313.25 313.75