PB 1011

PB 1011 Test Jack, PCB Mounting, Ø 2 mm, 10 A



Test Jack

Test Jack





pdf data sheet, html datasheet, General Product Information, Approvals,

Distributor-Stock-Check, Accessories, Detailed request for product

See below: Approvals and Compliances

Weblinks

Test Jack

Description

- PCB
- Test Jack , Diameter 2.0 mm
- measuring and testing during operation
- Continuous electrical connection
- Resilient contacts, gold plated

Technical Data			
Diameter Rated current	2mm 10A	Solderability	235 °C / 2 sec acc. to IEC 60068-2- 20 , Test Ta, method 1
Admissible switching power	220 W / max. 5 A or 75 VDC	Resistance to Soldering Heat	260 °C / 5 sec acc. to IEC 60068-2- 20 , Test Tb, method 1A
	440 W / max. 5 A or 50 VAC	Weight	0.5g
Contact resistance	< 7 m Ω at 20 mV	Material: Housing	Thermoplastic (PC), UL 94V-2
Allowable Operation Tempe- rature	-25 °C to 70 °C	Surface of contacts	gold plated , Thickness 0.5 µm

Approvals and Compliances

Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in Details about Approvals

SCHURTER products are designed for use in industrial environments. They have approvals from independent testing bodies according to national and international standards. Products with specific characteristics and requirements such as required in the automotive sector according to IATF 16949, medical technology according to ISO 13485 or in the aerospace industry can be offered exclusively with customer-specific, individual agreements by SCHURTER.

Application standards

Application standards where the product can be used


Organization	Design	Standard	Description
IEC	Designed for applications acc.	IEC/UL 62368-1	Audio/video, information and communication technology equipment - Part 1: Safety requirements
Compliances			

Compliances

The product complies with following Guide Lines

Identification	Details	Initiator	Description
	RoHS	SCHURTER AG	Directive RoHS 2011/65/EU, Amendment (EU) 2015/863
©	China RoHS	SCHURTER AG	The law SJ / T 11363-2006 (China RoHS) has been in force since 1 March 2007. It is similar to the EU directive RoHS.
REACH	REACH	SCHURTER AG	On 1 June 2007, Regulation (EC) No 1907/2006 on the Registration, Evaluation, Authorization and Restriction of Chemicals 1 (abbreviated as "REACH") entered into force.

Dimensions [mm]

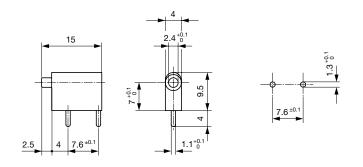

Diagrams

All Variants

Product group	Color	Order Number	
Test Jack	black	0040.1011	
Test Jack	red	0040.1012	
Test Jack	blue	0040.1014	

Most Popular.

Availability for all products can be searched real-time:https://www.schurter.com/en/Stock-Check/Stock-Check-SCHURTER

Packaging unit 100 F	Pcs
----------------------	-----

Mating Inlets/Plugs

Category / Description



Test Jacks & Probes Overview complete

PS 1061, 10 A, Test Probe

PS 1061

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Test Plugs & Test Jacks category:

Click to view products by Schurter manufacturer:

Other Similar products are found below :

01-2601-4-0210 01-2601-4-0212 01-2604-4-0212 01-2604-5-0210 01-2150-1-0312 01-2350-1-02 01-2352-1-02 01-2368-1-02 01-2604-4-0210 01-2604-5-0212 01-2606-4-0210 01-2606-4-0212 01-2606-5-0212 M39024/10-01G M39024/10-17G M39024/11-09G M39024/11-42 M39024/11-43 M39024/12-08 707-5311 707-5402-01-19 707-5410 923739-40-I R644543000 R948161000 R999351000 1408-4 1499-101 1533-1 1659559 1659567 1663921 1663939 1696-102 174-R825B-EX NYS508-BU NYS508-O 211-101 RS100GBL RS250GBL 251-102 25-2251-2-03 25-2259-2-03 923743-16-I 923743-24-I 923743-28-I 2854-BLU 30-443G 1680 174-R819B-EX