

Cover for Holder OGN, OGN-SMD



4W/10A

See below:  
[Approvals and Compliances](#)

**References**

Mating cover to [OGN](#); [OGN-SMD](#);

**Weblinks**

[pdf data sheet](#), [html datasheet](#), [General Product Information](#), [Packaging details](#), [Distributor-Stock-Check](#), [Detailed request for product](#), [Microsite](#)

**Technical Data**

|                              |  |
|------------------------------|--|
| Fuse-Link                    | 5 x 20 mm  |
| Rated Power Acceptance IEC   | 4 W / 10 A @ Ta 23 °C<br>2.5 W / 10 A with transparent cover |
| Admissible Ambient Air Temp. | -40 °C to 85 °C  |
| Material: Cover              | Thermoplastic UL 94V-0                                       |
| Storage Conditions           | 0 °C to 60 °C, max. 70% r.h.                                 |




**Approvals and Compliances**

Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in [Details about Approvals](#)

SCHURTER products are designed for use in industrial environments. They have approvals from independent testing bodies according to national and international standards. Products with specific characteristics and requirements such as required in the automotive sector according to IATF 16949, medical technology according to ISO 13485 or in the aerospace industry can be offered exclusively with customer-specific, individual agreements by SCHURTER.



**Product standards**

Product standards that are referenced

| Organization  | Design                | Standard             | Description  |
|---|-----------------------|----------------------|--|
|  | Designed according to | IEC 60127-6          | Miniature fuses. Part 6. Fuse-holders for miniature fuse-links |
|  | Designed according to | UL 4248-1            | Fuseholder general requirements                                |
|  | Designed according to | CSA C22.2 no. 4248.1 | Fuseholder general requirements                                |





**Application standards**

Application standards where the product can be used

| Organization  | Design                         | Standard       | Description  |
|---|--------------------------------|----------------|--|
|  | Designed for applications acc. | IEC/UL 62368-1 | IEC 62368-1 includes the basic requirements for safety of audio, video, information technology and office equipment.   |
|  | Designed for applications acc. | IEC 60335-1    | Safety of electrical appliances for household and similar purposes. Meets the requirements for appliances in unattended use. This includes the enhanced requirements of glow wire tests acc. to IEC 60695-2-11 or -12 & -13. |


## Compliances

The product complies with following Guide Lines

| Identification   | Details                    | Initiator   | Description   |
|--|----------------------------|-------------|---|
|  | RoHS                       | SCHURTER AG | Directive RoHS 2011/65/EU, Amendment (EU) 2015/863  |
|  | China RoHS                 | SCHURTER AG | The law SJ / T 11363-2006 (China RoHS) has been in force since 1 March 2007. It is similar to the EU directive RoHS.  |
|  | REACH                      | SCHURTER AG | On 1 June 2007, Regulation (EC) No 1907/2006 on the Registration, Evaluation, Authorization and Restriction of Chemicals 1 (abbreviated as "REACH") entered into force. |
|  | White Paper Glow wire test | SCHURTER AG | Meets the requirements of IEC 60335-1 for appliances in unattended use. This includes the enhanced requirements of glow wire tests acc. to IEC 60695-2-11 or -12 &-13.  |

## Dimension [mm]

25 mm

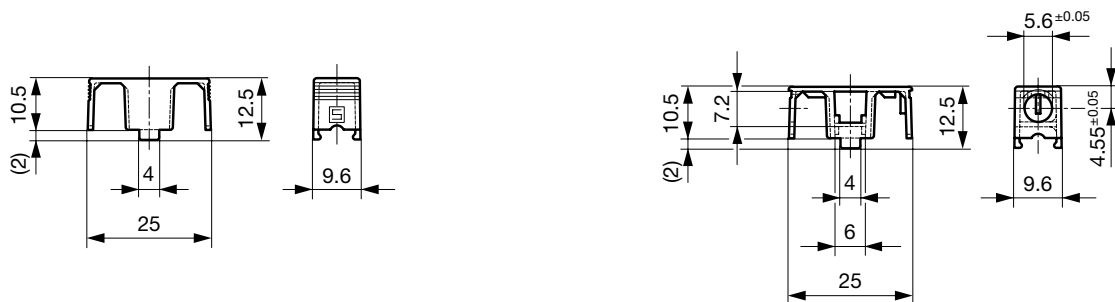

Variants 0853.0551, 0853.0571, 0853.0573 and 0853.0575

Variant 0853.0576

## All Variants

| Designation                        | Order Number |
|------------------------------------|--------------|
| Transparent Cover (not for reflow) | 0853.0551    |
| Cover for 245 °C Reflow            | 0853.0571    |
| Cover for 260 °C Reflow            | 0853.0573    |
| Cover, black (not for reflow)      | 0853.0575    |
| Cover with Clamp for 245 °C Reflow | 0853.0576    |

Most Popular.

Availability for all products can be searched real-time: <https://www.schurter.com/en/Stock-Check/Stock-Check-SCHURTER>

## Packaging Unit

Bulk (100 pcs.)

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Fuse Holder Accessories](#) category:*

*Click to view products by [Schurter](#) manufacturer:*

Other Similar products are found below :

[BK/1A1337](#) [1A1853](#) [1A4421](#) [1A5220](#) [903-048](#) [1A1337](#) [1A4544](#) [1A5220-01](#) [CO2-10](#) [CO3-03](#) [348897](#) [B072-7007](#) [BK/1A4421](#) [X30110](#)  
[09030012H](#) [09050023H](#) [00970021HXNVDL](#) [00BS0232P](#) [CO2-04](#) [BK1A1853](#) [BK9834](#) [0880.0001](#) [00970053XP](#) [3566C](#) [00970053H](#)  
[04450718ZX900](#) [CH10CL](#) [BP/FP-3](#) [58600000005](#) [33-012C](#) [880140](#) [00970023S](#) [880150](#) [PDM71009ZXM](#) [B109-7091-4](#) [B109-7091-6](#)  
[B109-7091-5](#) [901-524](#) [CVR-RH-25100](#) [LFH60030FBC](#) [03540514Z](#) [03540526Z](#) [03540531Z](#) [03540541Z](#) [03540525Z](#) [03540537Z](#)  
[03540539Z](#) [03540540Z](#) [FEH](#) [CC2/J](#)