

Fuse NH-DIN00-DIN00C 500V



Description

- Characteristic gG (gL)
- According to IEC 269
- According VDE 0636
- Selectivity 1:1.6
- Removal tags energized

Weblinks

[pdf-datasheet](#), [html-datasheet](#), [CE declaration of conformity](#), [RoHS](#), [REACH](#), [CAD-Drawings](#), [Detailed request for product](#)

Technical Data

Rated Current In	6- 160 A
Rated Voltage	500 VAC
Breaking Capacity	120 kA
Rated Power Operating Frequency fe	50 Hz

Contact blade	Full contact blades, Cu silvered
Characteristic resistance	even with alternating load nonagin to VDE 0636
Indicator	Combi indicator


Basic Design

Insulator	Ceramic
Metal components	corrosion-resistant (rustproof)

Power Dissipation (Watt) operating temperature max.

The power dissipation is the so called power loss at rated current load and operation temperature acc. VDE 0636 . It is to be measured in Watt at AC condition. The voltage tap is to be assured that the power dissipation of the blade contacts are included. This means the measure contact need to be applied at the ends of the blade contacts. The standard VDE 0636 part 1 and 2 requires that following maximal permissible power losses are not exceeded.

Dimension

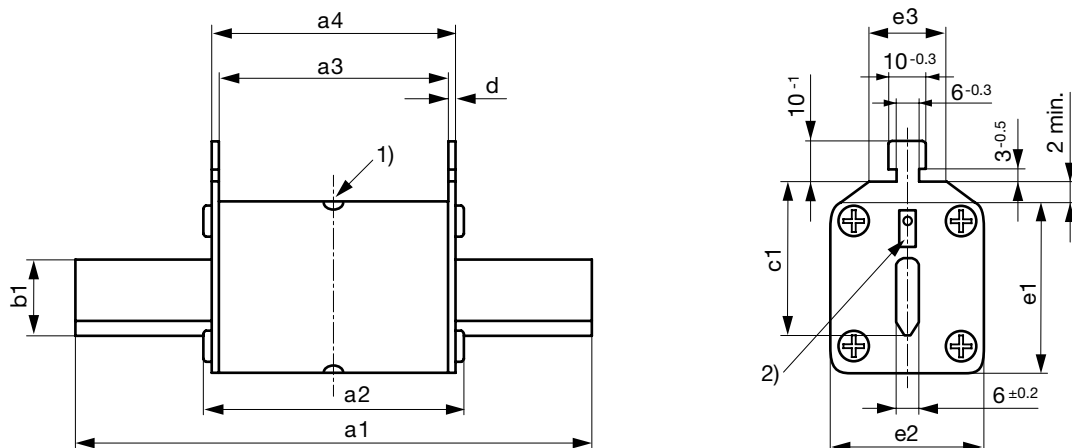

DIN	a1	a2	a3	a4	b1	c1	d	e1	e2	e3
00	78.5 ±1,5	54 -6	45 ±1,5	49 ±1,5	15 +0,8	35 ±0,8	2,0 +1,0/-0,5	41	30 -1,0	20 ±5
00C	78.5 ±1,5	54 -6	45 ±1,5	49 ±1,5	15 +0,8	35 ±0,8	2,0 +1,0/-0,5	36	20 +0,9	20 ±5

- 1) Centre indicator
- 2) Flat indicator

## All Variants

Rated current [A]	Style [Compact]	Power Loss [W]	Order Number	E-No
6	C	1.3	<a href="#">1301.0071</a>	840500079
10	C	1.5	<a href="#">1301.0072</a>	840500089
16	C	1.8	<a href="#">1301.0073</a>	840500099
20	C	1.9	<a href="#">1301.0074</a>	840500109
25	C	2.4	<a href="#">1301.0075</a>	840500119
35	C	3.1	<a href="#">1301.0076</a>	840500139
40	C	3.6	<a href="#">1301.0077</a>	840500149
50	C	4.2	<a href="#">1301.0078</a>	840500159
63	C	5.0	<a href="#">1301.0079</a>	840500179
80	C	5.2	<a href="#">1301.0080</a>	840500199
100	C	6.7	<a href="#">1301.0081</a>	840500209
125	-	7.8	<a href="#">1301.0016</a>	840100219
160	-	9.4	<a href="#">1301.0061</a>	840100239

Most Popular:

Availability for all products can be searched real-time: <http://www.schurter.com/Stock-Check/Stock-Check-SCHURTER>

**Packaging Unit** 3 Pcs

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Specialty Fuses](#) category:*

*Click to view products by [Schurter](#) manufacturer:*

Other Similar products are found below :

[63NZ02GL](#) [714125](#) [722134](#) [F02A-4AS](#) [F02B-1A](#) [80NH00GR-6](#) [FWH-200A](#) [FWP-32A14F](#) [12LCT](#) [12TDLSJ63](#) [REN-3](#) [15.5CAVH2E](#)  
[ECF-1](#) [ECF-2](#) [ECF-3](#) [ECF-4](#) [170M0213](#) [170M1369-D](#) [170M3809D](#) [BK/F02B-1A](#) [N-2-1/2](#) [N-3-2/10](#) [NITD2](#) [20D16](#) [KAA-3](#) [KAB-30](#)  
[KAW-3](#) [2D16](#) [LKN-125B](#) [16D27SB](#) [16FC](#) [170M1564D](#) [170M2616](#) [170M2668](#) [170M4161](#) [170M4241](#) [170M4699](#) [ESD63](#) [ABS-30](#) [ABS-8](#)  
[ACF-15](#) [ACF-30](#) [ACO-30](#) [F02A-10A](#) [SSD10](#) [200NH1M](#) [FWP-25A14FI](#) [FWP-40A14FI](#) [FWP-500A](#) [FWP-63A22FI](#)