

Surface Mount Fuse, 7.4 x 3.1 mm, Time-Lag T, 125 VAC, 125 VDC



Exemplary part photo depending on part no.

UL 248-14 · 125 VAC · 125 VDC · Time-Lag T

See below:

[Approvals and Compliances](#)

Description

- Directly solderable on printed circuit boards

References


Corresponding Fuseholder

Assembled Fuseholder

Weblinks

[pdf data sheet](#), [html datasheet](#), [General Product Information](#), [Distributor-Stock-Check](#), [Detailed request for product](#)

Technical Data

| | |
|------------------------------|--|
| Rated Voltage | 125 VAC, 125 VDC |
| Rated current | 0.25 - 6.3 A |
| Breaking Capacity | 100 A |
| Characteristic | Time-Lag T |
| Mounting | PCB, SMT |
| Admissible Ambient Air Temp. | -40 °C to +85 °C |
| Climatic Category | 40/085/21 acc. to IEC 60068-1 |
| Material: Housing | Thermoplastic, UL 94V-0 |
| Material: Terminals | Copper alloy, tin-plated |
| Unit Weight | 0.01 g |
| Storage Conditions | 0 °C to 40 °C, max. 70% r.h. |
| Product Marking |  Type, Rated current, Certification marks |

| | |
|------------------------------|---|
| Soldering Methods | Reflow, Wave Soldering Profile |
| Solderability | 245 °C / 3 sec acc. to IEC 60068-2-58, Test Td |
| Resistance to Soldering Heat | 260 +0/-5 °C / 40 sec acc. to IPC/JEDEC J-STD-020D, Level 1 |
| Moisture Sensitivity Level | MSL 1, J-STD-020 |
| Case Resistance | acc. to EIA/IS-722, Test 4.7 >100 MΩ (between leads and body) |
| Moisture Resistance Test | MIL-STD-202, Method 106 (50 cycles in a temp./mister chamber) |
| Mechanical Shock | MIL-STD-202, Method 213 Condition A |
| Resistance to Solvents | MIL-STD-202, Method 215 |
| Terminal Strength | MIL-STD-202, Method 211A (Deflection of board 1 mm for 1 minute) |

Approvals and Compliances


Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in [Details about Approvals](#)

SCHURTER products are designed for use in industrial environments. They have approvals from independent testing bodies according to national and international standards. Products with specific characteristics and requirements such as required in the automotive sector according to IATF 16949, medical technology according to ISO 13485 or in the aerospace industry can be offered exclusively with customer-specific, individual agreements by SCHURTER.

Approvals



The approval mark is used by the testing authorities to certify compliance with the safety requirements placed on electronic products.

Approval Reference Type: OMT 125

| Approval Logo | Certificates | Certification Body | Description |
|---|------------------------------|--------------------|------------------------|
|  | UL Approvals | UL | UL File Number: E41599 |


Product standards

Product standards that are referenced

| Organization | Design | Standard | Description |
|---|-----------------------|--------------------|---|
|  | Designed according to | UL 248-14 | Low voltage fuses - Part 14: Additional fuses |
|  | Designed according to | CSA22.2 No. 248.14 | Low-Voltage Fuses - Part 14: Supplemental Fuses |





Application standards

Application standards where the product can be used


| Organization | Design | Standard | Description |
|--|--------------------------------|----------------|--|
|  | Designed for applications acc. | IEC/UL 62368-1 | IEC 62368-1 includes the basic requirements for safety of audio, video, information technology and office equipment. |



Compliances

The product complies with following Guide Lines

| Identification | Details | Initiator | Description |
|--|--|-------------|---|
|  | CE declaration of conformity | SCHURTER AG | The CE marking declares that the product complies with the applicable requirements laid down in the harmonisation of Community legislation on its affixing in accordance with EU Regulation 765/2008. |
|  | RoHS | SCHURTER AG | Directive RoHS 2011/65/EU, Amendment (EU) 2015/863 |
|  | China RoHS | SCHURTER AG | The law SJ / T 11363-2006 (China RoHS) has been in force since 1 March 2007. It is similar to the EU directive RoHS. |
|  | REACH | SCHURTER AG | On 1 June 2007, Regulation (EC) No 1907/2006 on the Registration, Evaluation, Authorization and Restriction of Chemicals 1 (abbreviated as "REACH") entered into force. |

Dimension [mm]

 7.4 mm

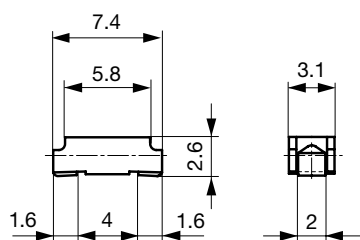


Soldering pads

Pre-Arcing Time


| Rated Current I_n | 1.0 x I_n min. | 2.0 x I_n max. | 8.0 x I_n min. | 8.0 x I_n max. |
|---------------------|------------------|------------------|------------------|------------------|
| 0.25 A - 0.375 A | 4 h | 60 s | 2 ms | 30 ms |
| 0.5 A - 6.3 A | 4 h | 60 s | 5 ms | 100 ms |


Time-Current-Curves

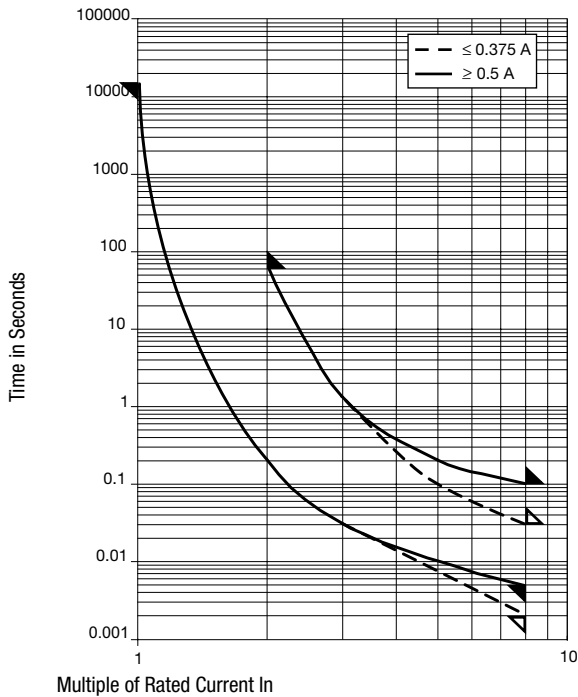

All Variants

| Rated Current [A] | Rated Voltage [VAC] | Rated Voltage [VDC] | Breaking Capacity | Voltage Drop 1.0 I _n typ. [mV] | Power Dissipation 1.0 I _n typ. [mW] | Melting I ² t 8.0 I _n typ. [A ² s] | U_{LUS} | Order Number |
|-------------------|---------------------|---------------------|-------------------|---|--|---|-----------|--------------|
| 0.25 | 125 | 125 | 1) | 142 | 35.5 | 0.02 | ● | 3404.0110.11 |
| 0.25 | 125 | 125 | 1) | 142 | 35.5 | 0.02 | ● | 3404.0110.22 |
| 0.25 | 125 | 125 | 1) | 142 | 35.5 | 0.02 | ● | 3404.0110.24 |
| 0.375 | 125 | 125 | 1) | 123 | 46.1 | 0.054 | ● | 3404.0111.11 |
| 0.375 | 125 | 125 | 1) | 123 | 46.1 | 0.054 | ● | 3404.0111.22 |
| 0.375 | 125 | 125 | 1) | 123 | 46.1 | 0.054 | ● | 3404.0111.24 |
| 0.5 | 125 | 125 | 1) | 95 | 47.5 | 0.16 | ● | 3404.0112.11 |
| 0.5 | 125 | 125 | 1) | 95 | 47.5 | 0.16 | ● | 3404.0112.22 |
| 0.5 | 125 | 125 | 1) | 95 | 47.5 | 0.16 | ● | 3404.0112.24 |
| 0.75 | 125 | 125 | 1) | 92 | 69 | 0.43 | ● | 3404.0113.11 |
| 0.75 | 125 | 125 | 1) | 92 | 69 | 0.43 | ● | 3404.0113.22 |
| 0.75 | 125 | 125 | 1) | 92 | 69 | 0.43 | ● | 3404.0113.24 |
| 1 | 125 | 125 | 1) | 88 | 88 | 0.77 | ● | 3404.0114.11 |
| 1 | 125 | 125 | 1) | 88 | 88 | 0.77 | ● | 3404.0114.22 |
| 1 | 125 | 125 | 1) | 88 | 88 | 0.77 | ● | 3404.0114.24 |
| 1.5 | 125 | 125 | 1) | 82 | 123 | 1.73 | ● | 3404.0115.11 |
| 1.5 | 125 | 125 | 1) | 82 | 123 | 1.73 | ● | 3404.0115.22 |
| 1.5 | 125 | 125 | 1) | 82 | 123 | 1.73 | ● | 3404.0115.24 |
| 2 | 125 | 125 | 1) | 75 | 150 | 3.58 | ● | 3404.0116.11 |
| 2 | 125 | 125 | 1) | 75 | 150 | 3.58 | ● | 3404.0116.22 |
| 2 | 125 | 125 | 1) | 75 | 150 | 3.58 | ● | 3404.0116.24 |
| 2.5 | 125 | 125 | 1) | 137 | 343 | 5.6 | ● | 3404.0117.11 |
| 2.5 | 125 | 125 | 1) | 137 | 343 | 5.6 | ● | 3404.0117.22 |
| 2.5 | 125 | 125 | 1) | 137 | 343 | 5.6 | ● | 3404.0117.24 |
| 3 | 125 | 125 | 1) | 128 | 384 | 8.06 | ● | 3404.0118.11 |
| 3 | 125 | 125 | 1) | 128 | 384 | 8.06 | ● | 3404.0118.22 |
| 3 | 125 | 125 | 1) | 128 | 384 | 8.06 | ● | 3404.0118.24 |
| 3.5 | 125 | 125 | 1) | 119 | 417 | 11.76 | ● | 3404.0119.11 |

| Rated Current [A] | Rated Voltage [VAC] | Rated Voltage [VDC] | Breaking Capacity | Voltage Drop 1.0 I _n typ. [mV] | Power Dissipation 1.0 I _n typ. [mW] | Melting I ² t 8.0 I _n typ. [A ² s] |  | Order Number |
|-------------------|---------------------|---------------------|-------------------|---|--|---|---|--------------|
| 3.5 | 125 | 125 | 1) | 119 | 417 | 11.76 | ● | 3404.0119.22 |
| 3.5 | 125 | 125 | 1) | 119 | 417 | 11.76 | ● | 3404.0119.24 |
| 4 | 125 | 125 | 1) | 77 | 308 | 12.3 | ● | 3404.0120.11 |
| 4 | 125 | 125 | 1) | 77 | 308 | 12.3 | ● | 3404.0120.22 |
| 4 | 125 | 125 | 1) | 77 | 308 | 12.3 | ● | 3404.0120.24 |
| 5 | 125 | 125 | 1) | 79 | 395 | 20.8 | ● | 3404.0121.11 |
| 5 | 125 | 125 | 1) | 79 | 395 | 20.8 | ● | 3404.0121.22 |
| 5 | 125 | 125 | 1) | 79 | 395 | 20.8 | ● | 3404.0121.24 |
| 6.3 | 125 | 125 | 1) | 82 | 516 | 25.4 | ● | 3404.0122.11 |
| 6.3 | 125 | 125 | 1) | 82 | 516 | 25.4 | ● | 3404.0122.22 |
| 6.3 | 125 | 125 | 1) | 82 | 516 | 25.4 | ● | 3404.0122.24 |

 Most Popular.

Availability for all products can be searched real-time: <https://www.schurter.com/en/Stock-Check/Stock-Check-SCHURTER>

1) 100 A @ 125 VAC / 100 A @ 125 VDC

| Packaging Unit | | |
|--------------------------|-----------|--|
| acc. IEC 60286-3 Type 2a | .xx = .11 | 100 St. in 16mm Blister Tape plastic bag |
| | .xx = .22 | 750 pcs. in 16mm tape on 18cm reel |
| | .xx = .24 | 3000 pcs. in 16mm tape on 33cm reel |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Surface Mount Fuses](#) category:

Click to view products by [Schurter](#) manufacturer:

Other Similar products are found below :

[FHC20402ADTP](#) [NFVC6125S0R50TRF](#) [SFT-125MA](#) [TF16SN2.00TTD](#) [7010.9810.57](#) [FCC16501ABTP](#) [FCC16102ABTP](#) [FHC16322ADTP](#)
[0308.375UR](#) [0308.750UR](#) [0308001.UR](#) [030801.5UR](#) [FCC16202ABTP](#) [F0603G0R03FNTR](#) [SKY87604-12](#) [SKY87604-11](#) [SKY87604-13](#)
[3404.0110.22](#) [7010.9962.63](#) [R451003.L](#) [R451.500L](#) [R451001.L](#) [3-103-119](#) [3-103-123](#) [24T 7A250V](#) [CLM1612P1412](#) [TB60](#) [24T 5A250V](#)
[06 100.4](#) [24T 1A250V](#) [TBF50](#) [4F3.15A250V](#) [TBF40](#) [2010T315mA250V](#) [4F2.5A250V](#) [SCT1A](#) [SGB091](#) [0154002.DRL](#) [0154008.DRL](#)
[0154.125DRL](#) [0154.250DRL](#) [0154.500DRL](#) [189140.0,8](#) [189140.0,4](#) [189140.0,63](#) [0402FA-R200](#) [0435.250KRHFS](#) [0468003.WR](#)
[0470001.DRSNP](#) [0494001.NRHF](#)