Compensated High Inductance Choke, 3-phase



See below:

Approvals and Compliances

Description

- Current compensated choke
- 3-phase choke
- Flexible wire
- Flange for mounting onto printed circuit board
- Fully potted resign

Applications

- Placed in front of frequency converter
- Stepper motor drives
- UPS-systems
- Inverter

Weblinks

pdf data sheet, html datasheet, General Product Information, Approvals, Distributor-Stock-Check, Detailed request for product

| Technical Data | |
|---------------------------|--------------------------|
| Rated voltage | up to 540 VAC |
| | up to 760 VDC |
| | UL 600 VAC |
| Rated Current | 3 - 16A @ Ta 40 °C |
| Rated inductance | 4.0 - 50 mH, Tol30% +50% |
| Power Operating Frequency | 50 / 60 Hz |
| Terminal Type | Flexible wire |
| Weight | 145 - 1840g |
| Material: Housing | UL 94V-0 |

UL 94V-0

| Test Voltage | 2.5 kV, 50 Hz, 2 sec, winding to winding | | |
|---------------------------|--|--|--|
| Isolation Voltage | 2.5 kV eff., 50 Hz, 2 sec, winding to | | |
| | ambient | | |
| Climatic Category | 25/100/21 acc. to IEC 60068-1 | | |
| Allowable Operation Temp. | -25°C to 100°C | | |
| | | | |

Approvals and Compliances

Sealing Compound

Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in Details about Approvals

SCHURTER products are designed for use in industrial environments. They have approvals from independent testing bodies according to national and international standards. Products with specific characteristics and requirements such as required in the automotive sector according to IATF 16949, medical technology according to ISO 13485 or in the aerospace industry can be offered exclusively with customer-specific, individual agreements by SCHURTER.

Approvals

The approval mark is used by the testing authorities to certify compliance with the safety requirements placed on electronic products. Approval Reference Type: DKLP

Approval Logo Certificates **Certification Body** Description **UL** Approvals UL File Number: E72928 .**91**° 118

Application standards

Application standards where the product can be used

| Organization | Design | Standard | Description |
|--------------|--------------------------------|----------------|---|
| <u>IEC</u> | Designed for applications acc. | IEC/UL 62368-1 | Audio/video, information and communication technology equipment - Part 1: Safety requirements |

Compliances


The product complies with following Guide Lines

| Identification | Details | Initiator | Description |
|----------------|--------------------------------|-------------|---|
| C€ | CE declaration of conformity | SCHURTER AG | The CE marking declares that the product complies with the applicable requirements laid down in the harmonisation of Community legislation on its affixing in accordance with EU Regulation 765/2008. |
| UK CA | UKCA declaration of conformity | SCHURTER AG | The UKCA marking declares that the product complies with the applicable requirements laid down in the British Amendment of Regulation (EC) 765/2008. |
| RoHS | RoHS | SCHURTER AG | Directive RoHS 2011/65/EU, Amendment (EU) 2015/863 |
| © | China RoHS | SCHURTER AG | The law SJ / T 11363-2006 (China RoHS) has been in force since 1 March 2007. It is similar to the EU directive RoHS. |
| REACH | REACH | SCHURTER AG | On 1 June 2007, Regulation (EC) No 1907/2006 on the Registration, Evaluation, Authorization and Restriction of Chemicals 1 (abbreviated as "REACH") entered into force. |


Dimension [mm]

Case 29-3W

Case 31-3W

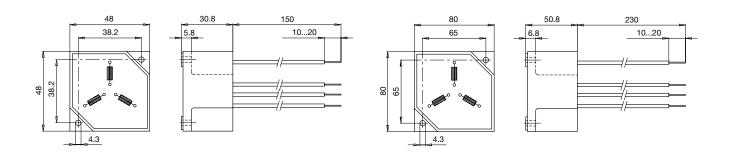


Case 33-3W

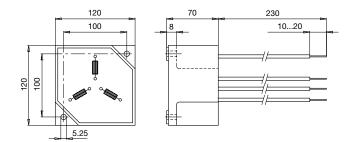


Impedance curves


DKLP-0329-xxxx



DKLP-0331-xxxx



DKLP-0333-xxxx



All Variants

| I _n [A] | L _n [mH] | R _{cu} [mΩ] | Tripped Power Dissipation [W] | f _{RES} [MHz] | Copper ø [mm] | Weight [g] | Housing | Packing unit [pcs.] | Order Number |
|--------------------|---------------------|-------------------------|-------------------------------|---------------------------|------------------|------------|---------|---------------------|----------------|
| 3 | 30 | 130 | 3.5 | 0.13 | 0.71 | 145 g | 29-3W | 12 | DKLP-0329-0330 |
| 5 | 10 | 48 | 3.6 | 0.15 | 0.9 | 145 g | 29-3W | 12 | DKLP-0329-0510 |
| 8 | 4 | 22 | 4.2 | 0.4 | 1.12 | 145 g | 29-3W | 12 | DKLP-0329-0804 |
| 3 | 50 | 260 | 7 | 0.055 | 0.71 | 509 g | 31-3W | 2 | DKLP-0331-0350 |
| 4 | 30 | 155 | 7.5 | 0.075 | 0.8 | 512g | 31-3W | 2 | DKLP-0331-0430 |
| 5 | 20 | 100 | 7.5 | 0.145 | 0.9 | 514 g | 31-3W | 2 | DKLP-0331-0520 |
| 8 | 40 | 110 | 21 | 0.05 | 1.12 | 1726 g | 33-3W | 1 | DKLP-0333-0840 |
| 16 | 10 | 30 | 23 | 0.14 | 1.6 | 1840 g | 33-3W | 1 | DKLP-0333-1610 |

A vailability for all products can be searched real-time: https://www.schurter.com/en/Stock-Check/Stock-Check-SCHURTER

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Common Mode Chokes / Filters category:

Click to view products by Schurter manufacturer:

Other Similar products are found below:

74279408 PE-62911NL PE-64683 ST6118T-R T8114NLT RD5122-10-6M0 TCM0806G-350-2P-T TCM0806G-650-2P-T IND-0110
UAL21V07012500 UAL21VR0802000 UAL24VR06500CH UALSC023000000 UALSC1020JH000 UALSC1520JH000
UALSU10VR20010 UALSU16VD30030 UALSU16VD40010 UALSU9H0305000 UALSU9HF060300 UALSU9VD070100 36-00037
5701610000 UALW21HS072450 UALSU9VD070400 UALSU9HF050500 UALSU9H0208000 UALSCF25081300 UAL24VK06450CH
PLT10HH501100PNB PLT10HH401100PNB PLT10HH1026R0PNB PE-67531 EXC-X4CH120X TLH10UB 113 0R5 2752041447
2752045447 CMS3-11-R 7351V CMF16-153131 744252510 T8116NLT FE2X10-4-2NL 744253200 744253101 744252220 TX8111NLT UAL30VR3500470 CTX01-19077-R T8003NLT