


Features


- 1500W peak pulse power capability at 10/1000µs waveform, repetition rate (duty cycles):0.01%
- Excellent clamping capability
- Typical failure mode is a short circuit condition for current events exceeding component rating
- Plastic package is flammability rated V-0 per UL-94
- Meet MSL level1, per J-STD-020, lead-frame maximum peak of 260°C



Applications

TVS devices are ideal for the transient voltage clamp protection of I/O Interfaces, DC power line bus and other circuits used in Telecom, Computer, Industrial and Consumer electronic applications.

Function Diagram

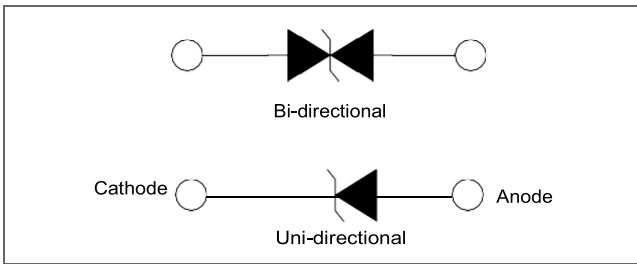


| Maximum Ratings and Thermal Characteristics (T _A =25°C unless otherwise noted) | | | |
|---|------------------|------------|------|
| Parameter | Symbol | Value | Unit |
| Peak Pulse Power Dissipation at T _A =25°C by 10/1000µs Waveform (Fig.3) | P _{PPM} | 1500 | W |
| Power Dissipation on Infinite Heat Sink at T _L =50°C | P _D | 6.5 | W |
| Peak Forward Surge Current, 8.3ms Single Half Sine Wave (Note 1) | I _{FSM} | 200 | A |
| Maximum Instantaneous Forward Voltage at 50A for Unidirectional Only(Note 2) | V _F | 3.5/5 | V |
| Operating Temperature Range | T _J | -55 to 150 | °C |
| Storage Temperature Range | T _{STG} | -55 to 150 | °C |

| AGENCY | AGENCY FILE NUMBER |
|--------|--------------------|
| | Pending |

Notes:


1. Measured on 8.3ms single half sine wave or equivalent square wave for unidirectional device only, duty cycle=4 per minute maximum.
2. V_F < 3.5V for single die parts and V_F < 5V for stacked-die parts.

Characteristics (T = 25°C unless otherwise noted)

| Part Number (Uni) | Part Number (Bi) | Key Marking | | Reverse Stand off Voltage V _R (Volts) | Breakdown Voltage V _{BR} (Volts) @ I _T | | Test Current I _T (mA) | Maximum Clamping Voltage V _C @ I _{RM} (V) | Maximum Peak Pulse Current I _{pp} (A) | Maximum Reverse Leakage I _R @ V _R (μA) | Agency Approval  |
|----------------------|---------------------|-------------|------|---|---|-------|---|---|--|--|---|
| | | UNI | BI | | MIN | MAX | | | | | |
| SMCJ5.0A | SMCJ5.0CA | 005A | 005C | 5.0 | 6.40 | 7.00 | 10 | 9.2 | 163.0 | 800 | |
| SMCJ6.0A | SMCJ6.0CA | 006A | 006C | 6.0 | 6.67 | 7.37 | 10 | 10.3 | 145.6 | 800 | |
| SMCJ6.5A | SMCJ6.5CA | 06FA | 06FC | 6.5 | 7.22 | 7.98 | 10 | 11.2 | 134.0 | 500 | |
| SMCJ7.0A | SMCJ7.0CA | 007A | 007C | 7.0 | 7.78 | 8.60 | 10 | 12.0 | 125.0 | 200 | |
| SMCJ7.5A | SMCJ7.5CA | 07FA | 07FC | 7.5 | 8.33 | 9.21 | 1 | 12.9 | 116.3 | 100 | |
| SMCJ8.0A | SMCJ8.0CA | 008A | 008C | 8.0 | 8.89 | 9.83 | 1 | 13.6 | 110.3 | 50 | |
| SMCJ8.5A | SMCJ8.5CA | 08FA | 08FC | 8.5 | 9.44 | 10.40 | 1 | 14.4 | 104.2 | 20 | |
| SMCJ9.0A | SMCJ9.0CA | 009A | 009C | 9.0 | 10.00 | 11.10 | 1 | 15.4 | 97.4 | 10 | |
| SMCJ10A | SMCJ10CA | 010A | 010C | 10 | 11.10 | 12.30 | 1 | 17.0 | 88.2 | 5 | |
| SMCJ11A | SMCJ11CA | 011A | 011C | 11 | 12.20 | 13.50 | 1 | 18.2 | 82.4 | 1 | |
| SMCJ12A | SMCJ12CA | 012A | 012C | 12 | 13.30 | 14.70 | 1 | 19.9 | 75.4 | 1 | |
| SMCJ13A | SMCJ13CA | 013A | 013C | 13 | 14.40 | 15.90 | 1 | 21.5 | 69.8 | 1 | |
| SMCJ14A | SMCJ14CA | 014A | 014C | 14 | 15.60 | 17.20 | 1 | 23.2 | 64.7 | 1 | |
| SMCJ15A | SMCJ15CA | 015A | 015C | 15 | 16.70 | 18.50 | 1 | 24.4 | 61.5 | 1 | |
| SMCJ16A | SMCJ16CA | 016A | 016C | 16 | 17.80 | 19.70 | 1 | 26.0 | 57.7 | 1 | |
| SMCJ17A | SMCJ17CA | 017A | 017C | 17 | 18.90 | 20.90 | 1 | 27.6 | 54.4 | 1 | |
| SMCJ18A | SMCJ18CA | 018A | 018C | 18 | 20.00 | 22.10 | 1 | 29.2 | 51.4 | 1 | |
| SMCJ20A | SMCJ20CA | 020A | 020C | 20 | 22.20 | 24.50 | 1 | 32.4 | 46.3 | 1 | |
| SMCJ22A | SMCJ22CA | 022A | 022C | 22 | 24.40 | 26.90 | 1 | 35.5 | 42.3 | 1 | |
| SMCJ24A | SMCJ24CA | 024A | 024C | 24 | 26.70 | 29.50 | 1 | 38.9 | 38.6 | 1 | |
| SMCJ26A | SMCJ26CA | 026A | 026C | 26 | 28.90 | 31.90 | 1 | 42.1 | 35.6 | 1 | |
| SMCJ28A | SMCJ28CA | 028A | 028C | 28 | 31.10 | 34.40 | 1 | 45.4 | 33.1 | 1 | |
| SMCJ30A | SMCJ30CA | 030A | 030C | 30 | 33.30 | 36.80 | 1 | 48.4 | 31.0 | 1 | |
| SMCJ33A | SMCJ33CA | 033A | 033C | 33 | 36.70 | 40.60 | 1 | 53.3 | 28.2 | 1 | |
| SMCJ36A | SMCJ36CA | 036A | 036C | 36 | 40.00 | 44.20 | 1 | 58.1 | 25.8 | 1 | |
| SMCJ40A | SMCJ40CA | 040A | 040C | 40 | 44.40 | 49.10 | 1 | 64.5 | 23.3 | 1 | |
| SMCJ43A | SMCJ43CA | 043A | 043C | 43 | 47.80 | 52.80 | 1 | 69.4 | 21.6 | 1 | |
| SMCJ45A | SMCJ45CA | 045A | 045C | 45 | 50.00 | 55.30 | 1 | 72.7 | 20.6 | 1 | |
| SMCJ48A | SMCJ48CA | 048A | 048C | 48 | 53.30 | 58.90 | 1 | 77.4 | 19.4 | 1 | |
| SMCJ51A | SMCJ51CA | 051A | 051C | 51 | 56.70 | 62.70 | 1 | 82.4 | 18.2 | 1 | |
| SMCJ54A | SMCJ54CA | 054A | 054C | 54 | 60.00 | 66.30 | 1 | 87.1 | 17.2 | 1 | |
| SMCJ58A | SMCJ58CA | 058A | 058C | 58 | 64.40 | 71.20 | 1 | 93.6 | 16.1 | 1 | |
| SMCJ60A | SMCJ60CA | 060A | 060C | 60 | 66.70 | 73.70 | 1 | 96.8 | 15.5 | 1 | |
| SMCJ64A | SMCJ64CA | 064A | 064C | 64 | 71.10 | 78.60 | 1 | 103.0 | 14.6 | 1 | |
| SMCJ70A | SMCJ70CA | 070A | 070C | 70 | 77.80 | 86.00 | 1 | 113.0 | 13.3 | 1 | |
| SMCJ75A | SMCJ75CA | 075A | 075C | 75 | 83.30 | 92.10 | 1 | 121.0 | 12.4 | 1 | |
| SMCJ78A | SMCJ78CA | 078A | 078C | 78 | 86.70 | 95.80 | 1 | 126.0 | 11.9 | 1 | |
| SMCJ85A | SMCJ85CA | 085A | 085C | 85 | 94.40 | 104.0 | 1 | 137.0 | 11.0 | 1 | |
| SMCJ90A | SMCJ90CA | 090A | 090C | 90 | 100.0 | 111.0 | 1 | 146.0 | 10.3 | 1 | |
| SMCJ100A | SMCJ100CA | 100A | 100C | 100 | 111.0 | 123.0 | 1 | 162.0 | 9.3 | 1 | |
| SMCJ110A | SMCJ110CA | 110A | 110C | 110 | 122.0 | 135.0 | 1 | 177.0 | 8.5 | 1 | |





| Part Number (Uni) | Part Number (Bi) | Key Marking | | Reverse Stand off Voltage V_R (Volts) | Breakdown Voltage V_{BR} (Volts) @ I_T | | Test Current I_T (mA) | Maximum Clamping Voltage V_C @ I_{DD} (V) | Maximum Peak Pulse Current I_{pp} (A) | Maximum Reverse Leakage I_R @ V_R (μ A) | Agency Approval  |
|----------------------|---------------------|-------------|------|--|--|-------|----------------------------------|---|---|--|---|
| | | UNI | BI | | MIN | MAX | | | | | |
| SMCJ120A | SMCJ120CA | 120A | 120C | 120 | 133.0 | 147.0 | 1 | 193.0 | 7.8 | 1 | |
| SMCJ130A | SMCJ130CA | 130A | 130C | 130 | 144.0 | 159.0 | 1 | 209.0 | 7.2 | 1 | |
| SMCJ150A | SMCJ150CA | 150A | 150C | 150 | 167.0 | 185.0 | 1 | 243.0 | 6.2 | 1 | |
| SMCJ160A | SMCJ160CA | 160A | 160C | 160 | 178.0 | 197.0 | 1 | 259.0 | 5.8 | 1 | |
| SMCJ170A | SMCJ170CA | 170A | 170C | 170 | 189.0 | 209.0 | 1 | 275.0 | 5.5 | 1 | |
| SMCJ180A | SMCJ180CA | 180A | 180C | 180 | 201.0 | 222.0 | 1 | 292.0 | 5.2 | 1 | |
| SMCJ190A | SMCJ190CA | 190C | 190A | 190 | 211.0 | 234.0 | 1 | 307.0 | 4.9 | 1 | |
| SMCJ200A | SMCJ200CA | 200A | 200C | 200 | 224.0 | 247.0 | 1 | 324.0 | 4.7 | 1 | |
| SMCJ220A | SMCJ220CA | 220A | 220C | 220 | 246.0 | 272.0 | 1 | 356.0 | 4.2 | 1 | |
| SMCJ250A | SMCJ250CA | 250A | 250C | 250 | 279.0 | 309.0 | 1 | 405.0 | 3.7 | 1 | |
| SMCJ300A | SMCJ300CA | 300A | 300C | 300 | 335.0 | 371.0 | 1 | 486.0 | 3.1 | 1 | |
| SMCJ350A | SMCJ350CA | 350A | 350C | 350 | 391.0 | 432.0 | 1 | 567.0 | 2.7 | 1 | |
| SMCJ400A | SMCJ400CA | 400A | 400C | 400 | 447.0 | 494.0 | 1 | 648.0 | 2.3 | 1 | |
| SMCJ440A | SMCJ440CA | 440A | 440C | 440 | 492.0 | 543.0 | 1 | 713.0 | 2.1 | 1 | |

I-V Curve Characteristics

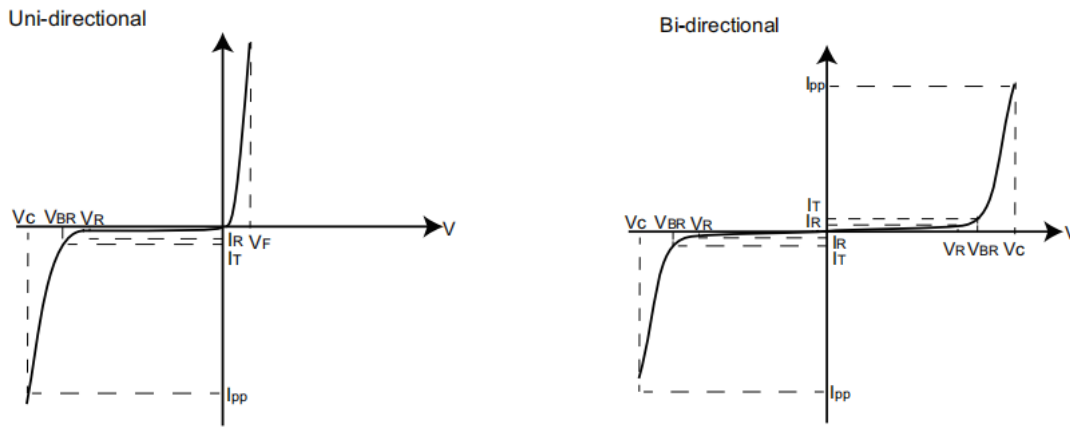

- P_{PPM} Peak Pulse Power Dissipation -- Max power dissipation
- V_R Stand-off Voltage -- Maximum voltage that can be applied to the TVS without operation
- V_{BR} Breakdown Voltage -- Maximum voltage that flows through the TVS at a specified test current (I_T)
- V_C Clamping Voltage -- Peak voltage measured across the TVS at a specified I_{PPM} (peak impulse current)
- I_R Reverse Leakage Current -- Current measured at V_R
- V_F Forward Voltage Drop for Uni-directional


Ratings and Characteristic Curves (T = 25°C unless otherwise noted)

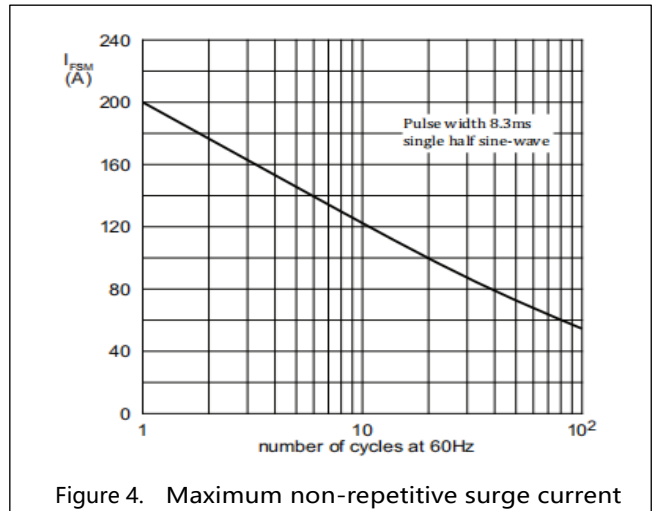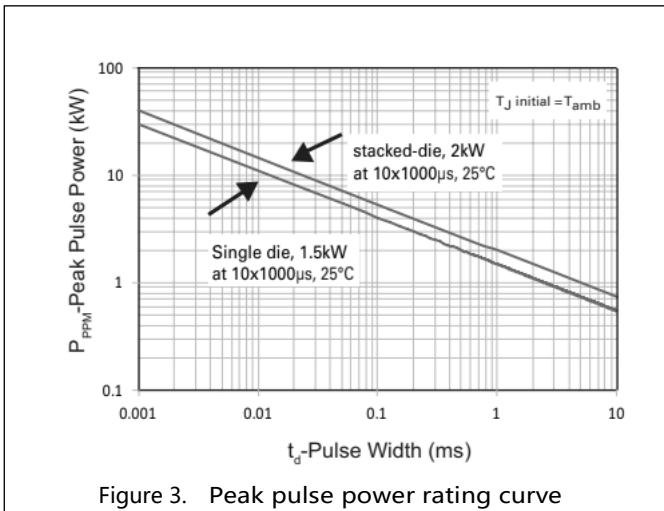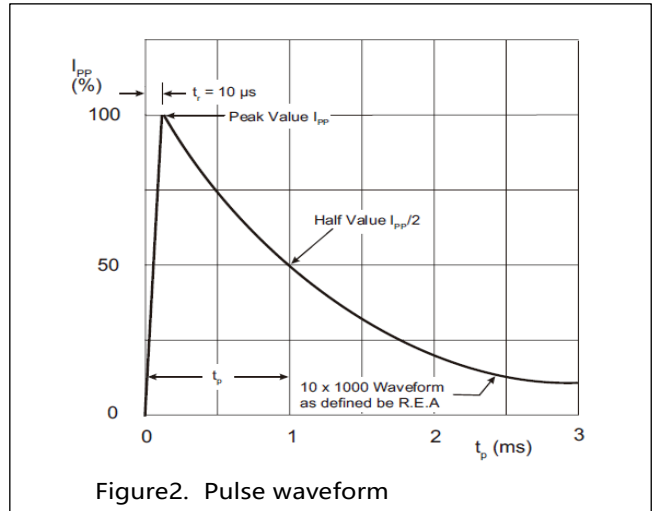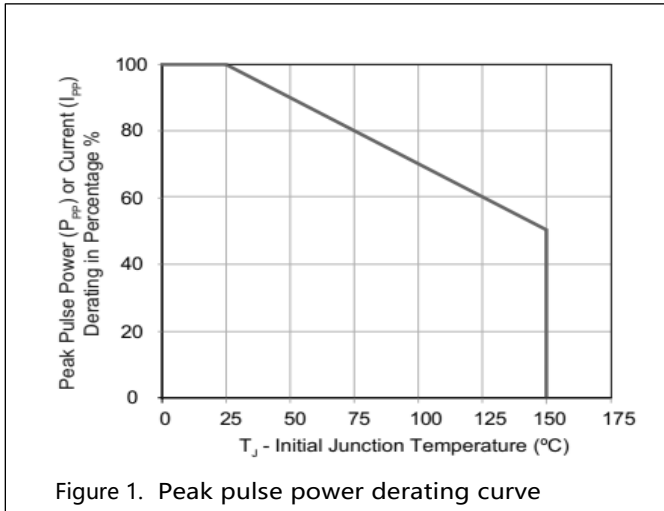


Soldering Parameters

Soldering profile

| | | |
|--|------------------------------------|-------------------------|
| Reflow Condition | | Lead-free assembly |
| Pre Heat | - Temperature Min ($T_{s(min)}$) | 150°C |
| | - Temperature Max ($T_{s(max)}$) | 200°C |
| | - Time (min to max) (t_s) | 60 – 180 secs |
| Average ramp up rate (Liquidus Temp (T_A) to peak) | | 3°C/second max |
| $T_{s(max)}$ to T_A - Ramp-up Rate | | 3°C/second max |
| Reflow | - Temperature (T_A) (Liquidus) | 217°C |
| | - Time (min to max) (t_s) | 60 – 150 seconds |
| Peak Temperature (T_p) | | 260 ^{+0/-5} °C |
| Time within 5°C of actual peak Temperature (t_p) | | 20 – 40 seconds |
| Ramp-down Rate | | 6°C/second max |
| Time 25°C to peak Temperature (T_p) | | 8 minutes Max. |
| Do not exceed | | 260°C |

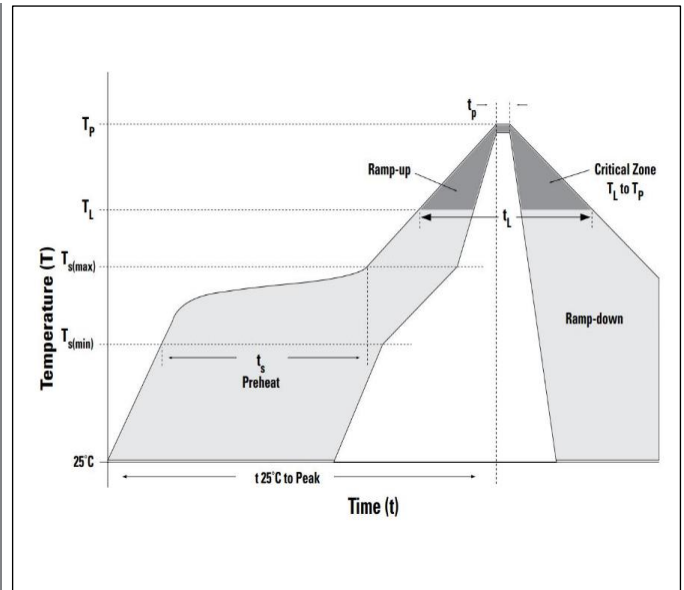


Dimensions

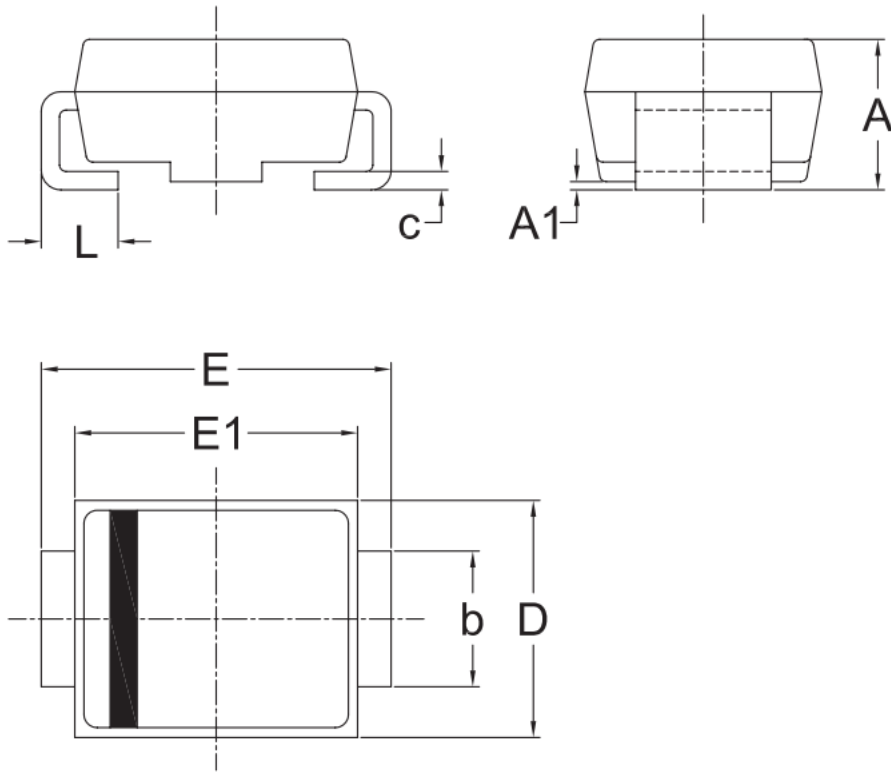


| UNIT | | A | A1 | b | c | D | E | E1 | L |
|------|-----|------|------|------|------|------|------|------|------|
| mm | Max | 2.83 | 0.30 | 3.10 | 0.25 | 6.15 | 8.15 | 7.05 | 1.60 |
| | Min | 2.33 | 0.00 | 2.80 | 0.15 | 5.85 | 7.65 | 6.75 | 0.90 |

Remark: Dimensions D and E1 do not include mold flash & gate remain.

Part Numbering

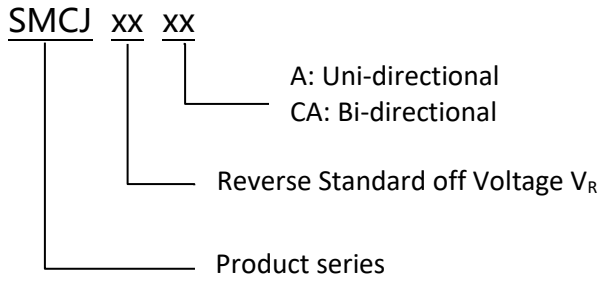


Part Marking

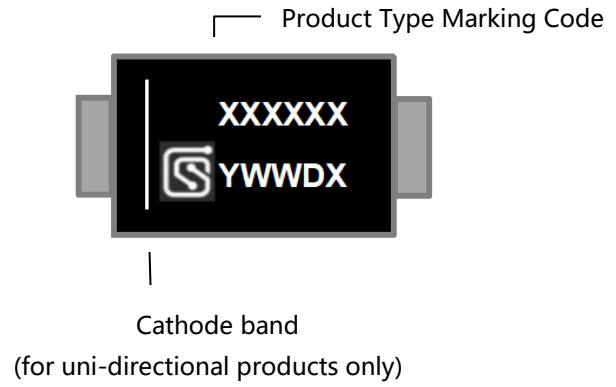

Packing

| Part number | Package name | Small packing quantity | Packing method |
|-------------|--------------|------------------------|----------------|
| SMCJXXXX | DO-214AB | 3000 | Tape & Reel |

Tape and Reel Specification

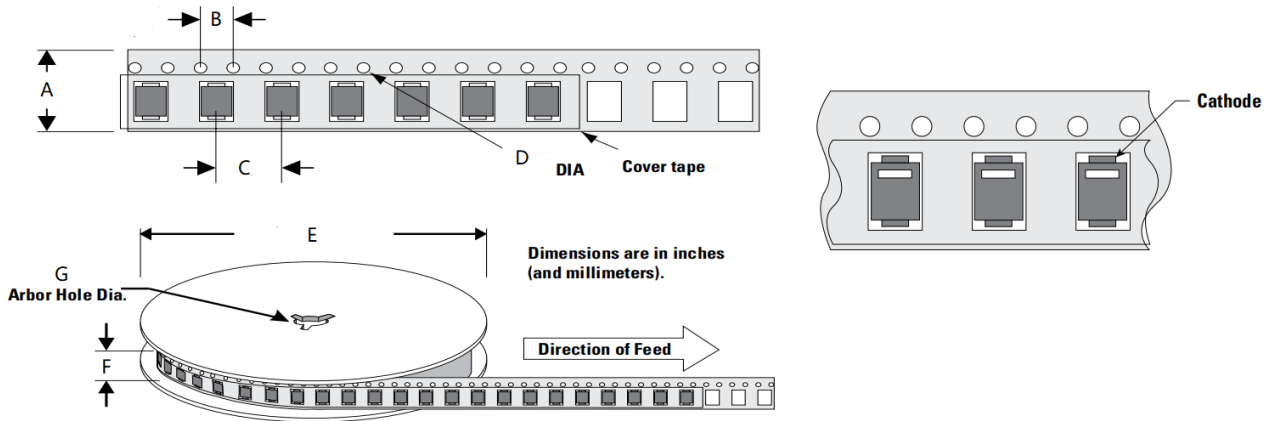

| Symbol | Millimeter |
|--------|-------------|
| A | 16.00±0.10 |
| B | 4.00±0.10 |
| C | 8.00±0.10 |
| D | 1.55±0.05 |
| E | 330.20±2.00 |
| F | 19.70±2.00 |
| G | 13.30±0.30 |

Revision history of Specification

| Version | Change Items | Effective Date |
|---------|----------------------------|----------------|
| 1.0 | Initial Release | 13-July-2021 |
| 1.1 | Modified Temperature Range | 16-August-2021 |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [ESD Suppressors / TVS Diodes](#) category:

Click to view products by [SCME](#) manufacturer:

Other Similar products are found below :

[60KS200C](#) [D18V0L1B2LP-7B](#) [D5V0F4U5P5-7](#) [NTE4902](#) [P4KE27CA](#) [P6KE11CA](#) [P6KE8.2A](#) [SA60CA](#) [SA64CA](#) [SMBJ12CATR](#)
[SMBJ33CATR](#) [SMBJ6.5A](#) [SMBJ8.0A](#) [ESD101-B1-02ELS](#) [E6327](#) [ESD112-B1-02EL](#) [E6327](#) [ESD7451N2T5G](#) [19180-510](#) [CPDT-5V0USP-](#)
[HF](#) [3.0SMCJ33CA-F](#) [3.0SMCJ36A-F](#) [HSPC16701B02TP](#) [JANTX1N6126A](#) [D3V3Q1B2DLP3-7](#) [D55V0M1B2WS-7](#) [SCM1293A-04SO](#)
[ESD200-B1-CSP0201](#) [E6327](#) [SM12-7](#) [CEN955](#) [W/DATA](#) [VESD12A1A-HD1-GS08](#) [CPDQC5V0-HF](#) [D1213A-01LP4-7B](#) [ESD101-B1-02EL](#)
[E6327](#) [AOZ8808DI-03](#) [5KP15A](#) [5KP48A](#) [5KP90A](#) [ESD3V3D7-TP](#) [15KPA36A-LF](#) [P4KE56CA](#) [P4KE68A](#) [P4KE91CATR](#) [P6KE120A](#)
[P6KE13CA](#) [P6KE43CA](#) [P6KE6.8CA](#) [P6KE8.2](#) [P6SMBJ20CA](#) [JANTX1N6072A](#) [SR2835ESKG](#) [SA90CA](#)