


# 3.2x2.5 SMD Crystal

## FEATURE

- Rugged AT-cut crystal construction.
- Miniature 3.2×2.5mm ceramic package.
- Designed for automatic mounting and reflow soldering.
- Embossed tapping specification.
- Pb-free and RoHS/Green compliant.

## APPLICATIONS

- Ideally suited designed for Bluetooth wireless communication sets, HDD, DSN, PDA, GPS, Digital Tuner, Wireless LAN and mobile phone.

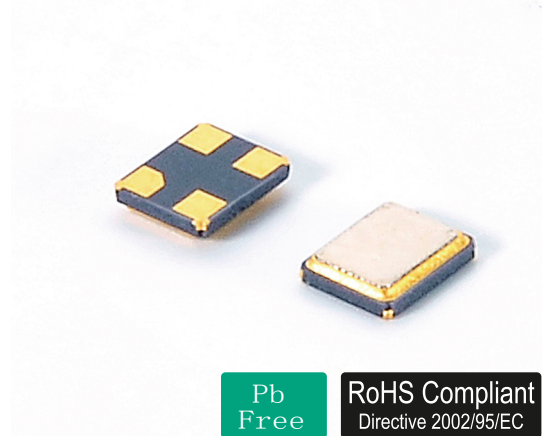

Pb Free

RoHS Compliant  
Directive 2002/95/EC

## Electrical Specifications 电气参数


| 型号     | Holder Type                                  | 3.2x2.5mm Ceramic Surface Mount          |
|--------|--|--|
| 频率范围   | Frequency Range                              | 12MHz to 54MHz                           |
| 调整频差   | Frequency Tolerance ( $\Delta F$ ) (at 25°C) | $\pm 10$ ppm to $\pm 30$ ppm             |
| 温度频差   | Frequency Drift                              | $\pm 10$ ppm to $\pm 30$ ppm*(See Notes) |
| 工作温度范围 | Operating Temperature Range                  | -20°C - +70°C / -40°C - +85°C            |
| 储存温度范围 | Storage Temperature Range                    | -40°C - +85°C / -55°C - +125°C           |
| 老化     | Aging (25°C)                                 | $\pm 3$ ppm/ year max.                   |
| 静电容    | Shunt Capacitance (C0)                       | 3pF max.                                 |
| 激励功率   | Drive Level                                  | 10 $\mu$ w (100 $\mu$ W max.)            |
| 绝缘阻抗   | Insulation Resistance (Rs)                   | 500 Megaohms Minimum at D.C100V          |
| 负载电容   | Load Capacitance (CL)                        | Suggested by customer                    |

※Notes:  $\pm 10$ ,  $\pm 20$ ,  $\pm 30$ ppm (-20°C to +70°C)  
 $\pm 20$ ,  $\pm 30$ ,  $\pm 50$ ppm (-40°C to +85°C) or depends on customer

## Equivalent Series Resistance and Mode of Operation 等效阻抗和振荡模式


| Frequency Range 频率范围      | ESR ( ) 等效阻抗     | Mode 振荡模式   |
|---------------------------|------------------|-------------|
| 12.000MHz ≤ f < 16.000MHz | 100 $\Omega$ max | Fundamental |
| 16.000MHz ≤ f < 20.000MHz | 80 $\Omega$ max  | Fundamental |
| 20.000MHz ≤ f < 24.000MHz | 60 $\Omega$ max  | Fundamental |
| 24.000MHz ≤ f < 54.000MHz | 40 $\Omega$ max  | Fundamental |

## Reflow Condition(回流焊条件)

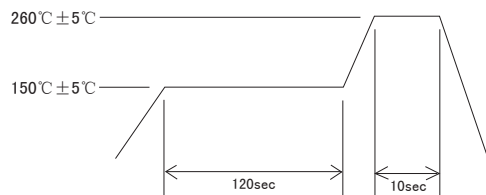

CYCLE TIME: 200sec Max.

## Mechanical Dimensions 外型尺寸

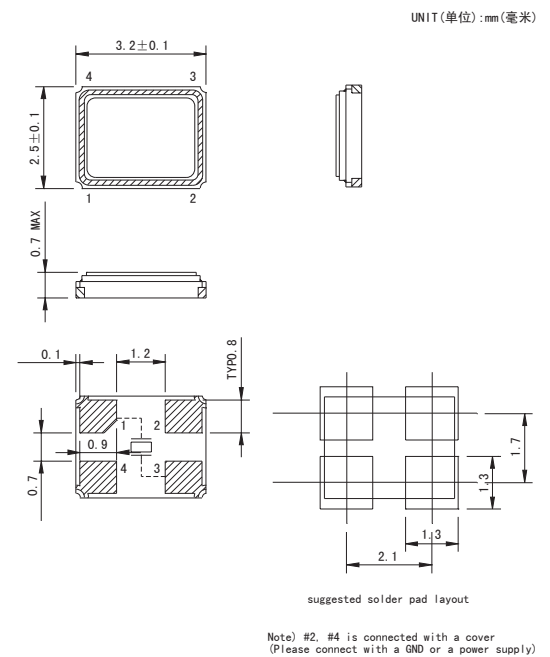

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Crystals](#) category:*

*Click to view products by [SCTF](#) manufacturer:*

Other Similar products are found below :

[CS325S24000000ABJT](#) [718-13.2-1](#) [MC405 32.0000K-R3:PURE SN](#) [FC-135R 32.7680KF-A3](#) [7A-40.000MAAE-T](#) [7B-27.000MBBK-T](#)  
[FL2000085](#) [9B-15.360MBBK-B](#) [9C-7.680MBBK-T](#) [ASH7K-32.768KHZ](#) [AT-41.600MAGQ-T](#) [BTD1062E05A-513](#) [LFXTAL066198Cutt](#)  
[9C-14.31818MBBK-T](#) [FA-238 50.0000MB30X-K3](#) [FC-12M 32.7680KA-AC3](#) [SSPT7F-9PF20-R](#) [FX325BS-38.88EEM1201](#)  
[LFXTAL065253Cutt](#) [LFXTAL066431Cutt](#) [XT9S20ANA14M7456](#) [XT9SNLANA16M](#) [646G-24-2](#) [7A-24.576MBBK-T](#) [7B-30.000MBBK-T](#)  
[WX26-32.768K-6PF](#) [9B-14.31818MBBK-B](#) [CD1AM](#) [7B-25.000MAAE-T](#) [7A-14.31818MBBK-T](#) [6504-202-1501](#) [6526-202-1501](#) [FA-118T](#)  
[27.1200MB50P-K0](#) [FC-135R 32.7680KA-A3](#) [ABM12-104-37.400MHZT](#) [ABLS-10.000MHZ-D3W-T](#) [BTJ112E01E-513](#) [BTJ722K01C-7067](#)  
[BTL-20-513](#) [TSX-3225 24.0000MF15X-AC](#) [TSX-3225 16.0000MF18X-AC](#) [BTJ120E02C](#) [BTL-12-513](#) [7A-10.000MBBK-T](#) [7A-](#)  
[11.0592MBBK-T](#) [ABM12-103-24.000MHZT](#) [CS325S25000000ABJT](#) [ABM3B-25.000MHZ-B2-X-T](#) [FC-135 32.7680KA-A5](#) [FX0800015](#)