



Nextion Enhanced NX8048K070 - Generic 7.0" HMI Touch Display

SKU 104060029

Description

The Nextion Enhanced versions are more powerful than the standard ones. Compare to the basic Nextion displays, the enhanced ones have added some new functions, such as: supporting built-in RTC, supporting save data to Flash, supporting GPIO, larger flash capacity and larger CPU clock. The enhanced Nextion series has 7 size covers from generic 2.4" to 7.0".

Nextion Enhanced NX8048K070 is a powerful 7.0" HMI TFT display, with 32MB Flash data storage space, 1024 byte EEPROM, 8192 byte RAM. With GPIO supported, now customers can use Nextion to control external devices.

Nextion is a seamless Human Machine Interface (HMI) solution that provides a control and visualization interface between a human and a process, machine, application or appliance. Nextion is mainly applied to Internet of thing (IoT) or consumer electronics field. It is the best solution to replace the traditional LCD and LED Nixie tube.

Nextion includes a hardware part (a series of TFT boards) and a software part (the Nextion editor). The Nextion TFT board uses only one serial port to communicate. It lets users avoid the hassle of wiring. We noticed that most engineers spend much time in application development but get unsatisfactory results. As a solution to this situation, Nextion editor has mass components such as button, text, progress bar, slider, instrument panel etc. to enrich the interface design. Furthermore, the drag-and-drop function ensures that users spend less time in programming, which will reduce 99% of their development workloads. With the help of this WYSIWYG editor, designing a GUI is a piece of cake. It's easy to adapt Nextion family HMI to existing projects- users just need to provide it a UART.

Note: there's a small power supply test board and a wire for you to test if the electricity supply is enough or not. Please see below image on how to use it.

Features

- Supports built-in RTC
- Supports GPIO
- SD Card interface: support max 32G Micro TF/SD card (FAT32 file format)
- Flash data storage space: 32MB
- EEPROM: 1024 bytes
- RAM: 8192 bytes
- Instruction buffer: 1024 bytes
- Color: 65K (65536) colors
- Resolution: 800×480 pixel
- Adjustable Brightness: 0~230 nit- the interval of adjustment is 1%

Specification

- Visual Area: 154.08mm(L)×85.92mm(W)
- Layout size: 181(L)×108(W)×9.3(H)
- Touch type: Resistive
- Backlight: LED
- Backlight lifetime (Average): >30,000 Hours
- Net Weight: 268 g
- Recommended power supply: 5V 2A
- Certificates: CE/EMC, RoHS (certificates)

Technical support


For technical support, please open a ticket on Nextion Forum.

Technical Details

Dimensions	181mm x 108mm x 9.3mm
Weight	G.W 340g N.W 268g
Battery	Exclude
Discontinued	No
Link Wiki	No
Display Resolution	800 x 480
Display Interface	Serial
Screen Type	Touch Screen
Display Controller	No
TFT display interface	N/A
Display Size	7.0"
Board Size	181mm*108mm
Expand	SD Card Socket; Touch Screen

Part List

7.0"Nextion Enhanced HMI Display	1
power supply test board	1
4-pin grove cable	1

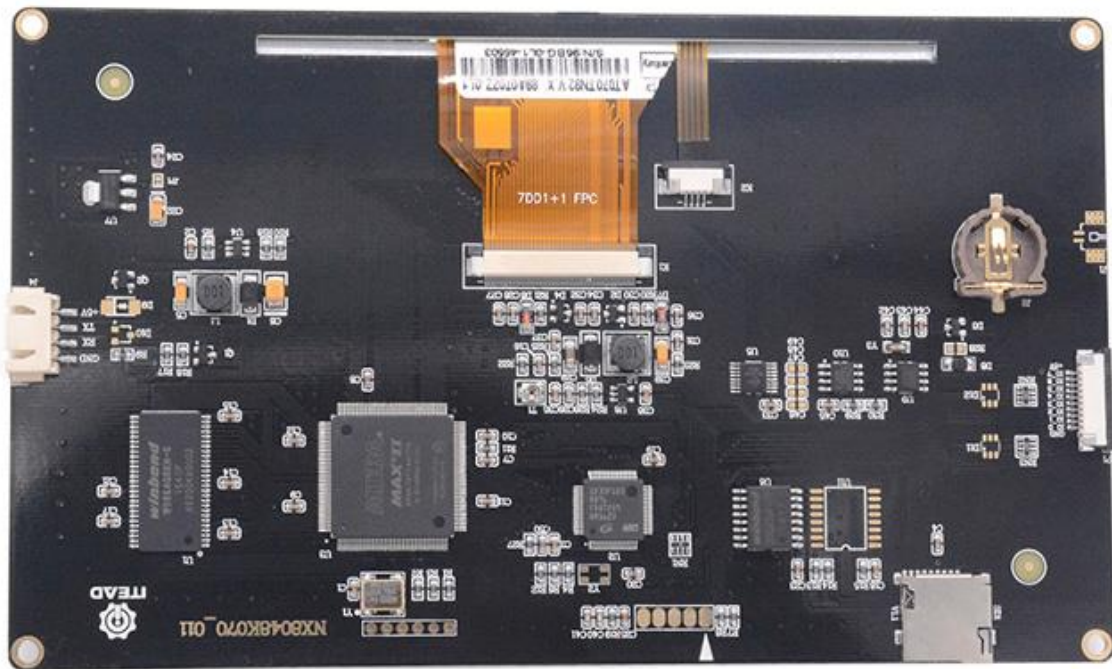

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Display Development Tools](#) category:

Click to view products by [Seeed Studio](#) manufacturer:

Other Similar products are found below :

[KIT 60121-3](#) [S5U13L02P00C100](#) [S5U13U11P00C100](#) [4172800XX-3](#) [TW8823-LC2-EVAL](#)

[KIT 67134-3](#) [LCD8000-43T](#) [CC-ACC-LCDW-70](#) [TW8836-L-EVAL](#) [TW8819-NA2-CR-](#)

[EVAL](#) [121CBL02-RPK](#) [KIT 60145-3](#) [S5U13748P00C100](#) [DFR0413](#) [ADM00931](#) [3248](#)

[MIKROE-3158](#) [MIKROE-3159](#) [SK-pixxiLCD-20P2](#) [NHD-1.69-BREAKOUT](#) [NHD-0.6-](#)

[BREAKOUT](#) [B3000MS035](#) [4702](#) [SK-pixxiLCD-39P4](#) [SK-pixxiLCD-13P2](#)