



Toybrick RK3399Pro AI Development Kit 6G+32GB

SKU 110110065



RK3399Pro AI Development Kit

NPU inside for Artificial intelligence deep learning




Support **TensorFlow / Caffe / Mxnet**
Support **8bit/16bit** operation Up to **3.0TOPs**

Description



The TB-RK3399Pro development board is equipped with the super-performance AI processor RK3399Pro, which has superior general-purpose computing performance. It equips ARM big.LITTLE architecture, dual-core Cortex-A72 + quad-core Cortex-A53, with technical leadership in overall performance and power consumption; quad-core ARM high-end GPU Mali-T860, integrates multiple bandwidth compression technology, providing overall excellent performance. Its on-chip NPU (Neural Network Processor) offers up to 3.0TOPs computing power.

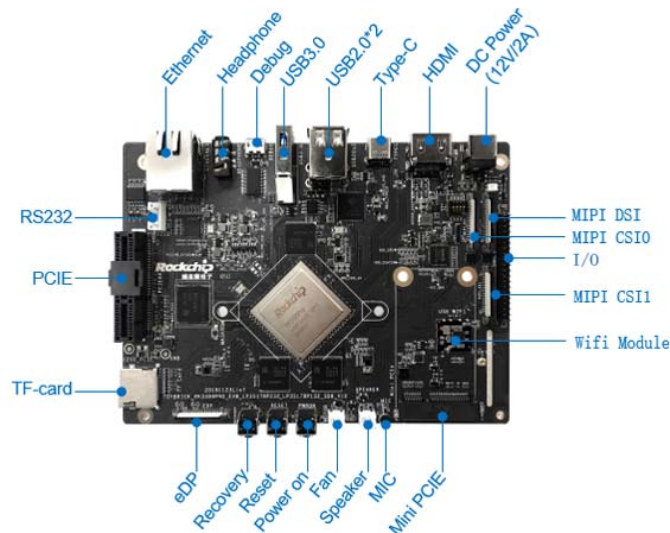


The TB-RK3399Pro development board has rich external interfaces, including 4 lanes PCIE and Mini PCIE, dual high-speed USB3.0 port Type-C + USB3.0 Type-A, dual MIPI CSI and dual ISP with pixel processing capability up to 1300W pixels, and HDMI2.1, DP1.2, MIPI-DSI and EDP; it also supports 8-channel digital microphone array input.

Support Android & Linux Dual System




Develop Tool for AI

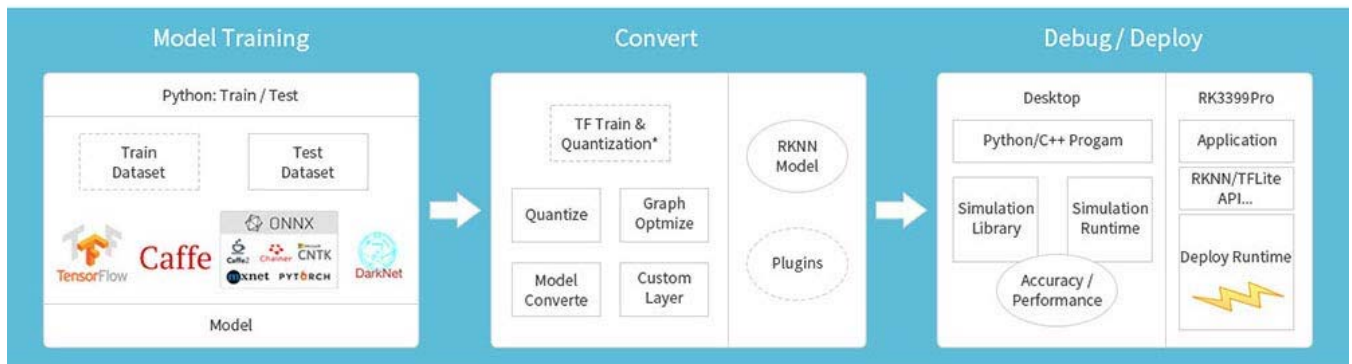

AI Application Programming Interface

- Support **Android NN API**
- Offer **RKNN Cross-Platform API**
- Linux support **TensorFlow**
- Rich **API Examples**

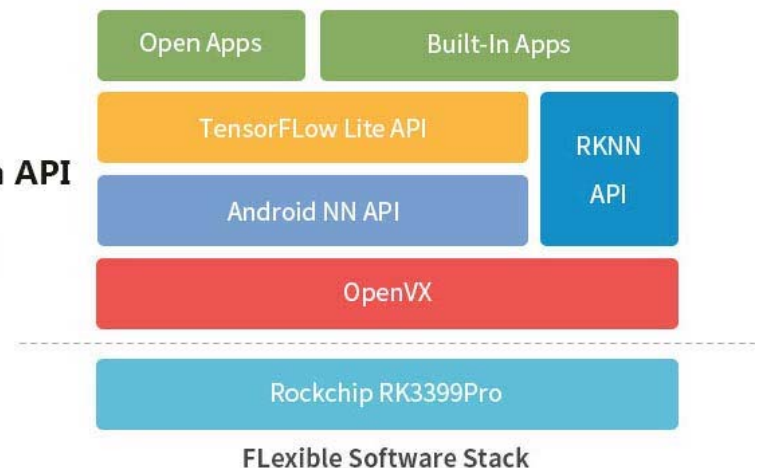

On the software side, TB-RK3399Pro is pre-installed Android and Linux system, support dual system boot and one-button OS switching. integrated rich AI application development components, providing friendly and concise application programming interface, seamless docking NPU to achieve AI computing hardware acceleration, support Various model inferences such as TensorFlow/TensorFlow lite/Caffe.



Specification

SoC Rockchip RK3399Pro (NPU built-in)

NPU Support 8-bit/16-bit Inference

Deep Learning Support TensorFlow/Caffe Model

CPU Dual Cortex-A72 +Quad Cortex-A53,64-bit CPU

Frequency up to 1.8GHz

GPU Mali-T860MP4 GPU

Memory 6GB LPDDR3

EMMC 32GB eMMC

Support SIM Card, TF Card

USB 2 x USB 2.0 Host, 1 x USB 3.0 Host, 1 x USB 3.0 Type-C

Dual OS Android 8.0 & Fedora 28

RK3399Pro

Dual-core Cortex-A72 up to 1.8GHz; Quad-core Cortex-A53 up to 1.4GHz

NPU up to 3.0TOPS

Mali-T860MP4 GPU

Dual-channel DDR3/DDR3L/LPDDR3/LPDDR4

4K UHD H265/H264/VP9

HDR10/HLG

H264 encoder


Dual MIPI CSI and ISP

USB Type-C and USB 2.0

CPU	Big.Little architecture: Dual Cortex-A72 + Quad Cortex-A53, 64-bit CPU
	Frequency is up to 1.8GHz
NPU	Support 8-bit/16-bit Inference
	Support TensorFlow/Caffe Model
GPU	Mali-T860MP4 GPU, OpenGL ES1.1/2.0/3.0/3.1, OpenVG1.1, OpenCL, DX11
	Supports AFBC (ARM Frame Buffer Compression)
Memory	3GB/6GB LPDDR3
	Support eMMC 5.1 with HS400, SDIO 3.0 with HS200
Multi-Media	4K VP9 and 4K 10bits H265/H264 video decoders, up to 60fps
	1080P other video decoders (VC-1, MPEG-1/2/4, VP8)
	1080P video encoders for H.264 and VP8
	Video post processor: de-interlace, de-noise, enhancement for edge/detail/color
Display	Dual VOP: one supports 4096x2160 with AFBC supported; the other supports 2560x1600
	Dual channel MIPI-DSI (4 lanes per channel)
	eDP 1.3 (4 lanes with 10.8Gbps) to support display, with PSR
	HDMI 2.0 for 4K 60Hz with HDCP 1.4/2.2
	DisplayPort 1.2 (4 lanes, up to 4K 60Hz)
	Supports Rec.2020 and conversion to Rec.709
Interface	Dual 13M ISP and dual channel MIPI CSI-2 receive interface
	USB 3.0 with type-C supported
	PCIe 2.1 (4 full-duplex lanes)

Embedded low power MCU for other application

8 channels I2S supports 8 channels RX or 8 channels TX

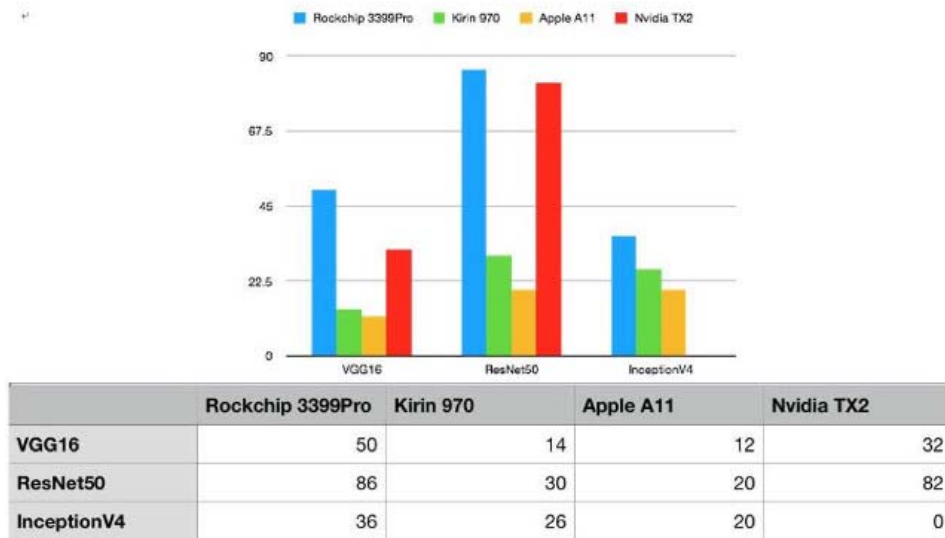

Shipping list:

- 1 x TB-RK3399Pro development board with Heatsink (6G+32G eMMC)
- 1 x Acrylic case with screws
- 1 x 12V-2A power supply
- 1 x Type C cable



ECCN/HTS

ECCN	5A002.a.1
HSCODE	



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Single Board Computers](#) category:

Click to view products by [Seeed Studio](#) manufacturer:

Other Similar products are found below :

[MANO882VPGGA-H81](#) [SSD3200W-S-SLC-INN](#) [AmITX-SL-G-Q170](#) [IB100](#) [CM3-BT4-E3845](#) [MVME61006E-2173R](#) [20-101-0738](#) [PCE-4128G2-00A1E](#) [RSB-4220CS-MCA1E](#) [SHB230DGGA-RC](#) [IB909AF-5650](#) [CM2-BT2-E3825-ETT](#) [AmITX-BT-I-E3815](#) [PICO841VGA-E3827](#) [IMB210VGGA](#) [MI981AF](#) [RSB-4221CS-MCA1E](#) [PCE-9228G2I-00A1E](#) [PCE-5029VG-00A1E](#) [AIMB-275G2-00A1E](#) [IB915F-3955](#) [IB909F-5010](#) [MI958F-16C](#) [Nitrogen7](#) [UPS-P-8G-64GB-PACK](#) [S2600WFT](#) [IB915AF-6300](#) [S2600STB](#) [BBS2600BPS](#) [IB915F-6100](#) [Nit6QP_MAX](#) [MI990VF-X28-E](#) [MI990VF-6820](#) [MI991AF-C236](#) [94AC6636](#) [BANANA PI BPI-M4](#) [BLKNUC7I3DNHNC1978015](#) [BLKNUC7I5DNK1E 960791](#) [IOT-LS1012A-OXALIS](#) [NITX-300-ET-DVI](#) [94AC6633](#) [CS-OMEGA-08](#) [MICROSOM I2 + WIFI/BT](#) [HUMMINGBOARD-I1 PRO + WIFI/BT](#) [HUMMINGBOARD-I2EX BASE + WIFI/BT](#) [HUMMINGBOARD-I2 PRO](#) [HUMMINGBOARD-I2 PRO + WIFI/BT](#) [HUMMINGBOARD-I4 PRO + WIFI/BT](#) [RT5350F-OLINUXINO-EVB](#) [VT60800013001-T](#)