
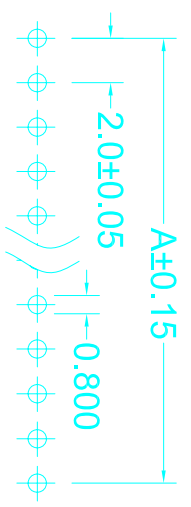
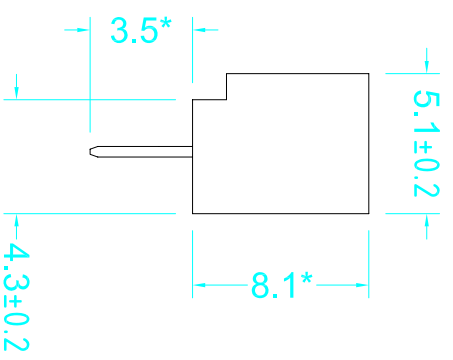
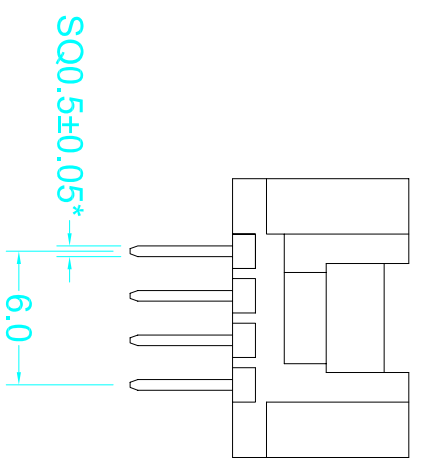



标记	版本	文件编号	变更前	变更后	日期	变更人
	A		/	新版图	2013.07.25	wzw



PCB LAYOUT

- Performance characteristics:
1. The dimensions with "*" are key control size
 2. Main body part material
Insulator: NYLON UL94V-0
Contact: Brass
 3. Plating
Contact: Tin-plated according to customer needs
 4. Electrical requirements:
Current rating: 2 A
Voltage rating: 250V
Contact resistance: ≤10 mΩ
Insulation resistance: ≥1000 MΩ
Withstanding voltage: 800 V AC, 60s
 5. Environment specification
Working temperature: -25℃~85℃
Method of packing: 1000 pcs per bag

DRAWN		DATE		SHENZHEN NS-TECH CO.,LTD.	
wzw		2013.07.25		 SHENZHEN NS-TECH CO.,LTD. TITLE: 1125S-4P SPEC: 不打K 环保	
CHECKED		DATE			
APPROVED		DATE		PART NO.	
未注公差表				CLIENT P/N	
.X ±0.5		X. ±5°		UNIT: mm	SCALE: free
.XX ±0.3		.X ±3°		FILE NO.:NS-1125-W00008	REV A
.XXX ±0.1		.XX ±1°			HC

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Seed Studio Accessories](#) category:

Click to view products by [Seed Studio](#) manufacturer:

Other Similar products are found below :

[101990565](#) [101990564](#) [101020003](#) [101020004](#) [101020025](#) [101020028](#) [101020038](#) [101020058](#) [101020472](#) [101020580](#) [101990029](#)
[101990058](#) [101990059](#) [101990061](#) [101990064](#) [101990065](#) [102020143](#) [102070002](#) [102070004](#) [102070007](#) [102070008](#) [102070011](#)
[102991175](#) [102991176](#) [103010002](#) [103020005](#) [103020007](#) [103020008](#) [103020010](#) [103020012](#) [103020030](#) [103020133](#) [103020135](#)
[103020136](#) [103020137](#) [103020252](#) [103020272](#) [103030005](#) [103030009](#) [103030075](#) [103030275](#) [103030276](#) [103030335](#) [103100063](#)
[103990183](#) [103990445](#) [104020006](#) [104020048](#) [104020108](#) [104020109](#)