



Description

RF Explorer RFEAH-25¹ is a 25mm diameter, high performance near field H-Loop antenna.

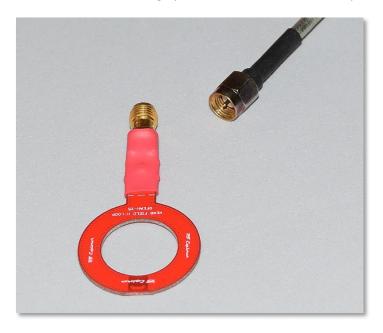

RFEAH-25 is a very sensitive, compact and easy to use H-loop near field antenna. The low-loss design exhibits at least 10dB more sensitivity in the range 20-6000MHz than other H-loop options in the market, at a much lower cost.



Compared with other near field antennas, RFEAH-25 is smaller and lighter, exactly what fits best when space is constrained in a PCB.

Included with the antenna is high quality semiflexible RF cable , this cable works as the handler of the antenna.

The big advantage of this approach: you can shape the cable the way you want for the antenna to be located exactly where you need it, in most cases with no need to hold it in your hand.

¹ Note: First production batch defined the antenna reference name as RFEAN25, whereas second and newer batches renamed as RFEAH-25. Except from CNC cut details on PCB edge (smoother in 2nd and newer batch), both antennas are identical. They both have same electrical performance.



Features

- Robust calibrated low cost H-loop near field antenna
- Can work with RF Explorer Spectrum Analyzer, Signal Generator and other RF instruments and devices
- Easy to use, reliable to find interference sources with high accuracy and resolution
- Can be used to detect hidden bugs and transmission sources with great spatial resolution
- Feasible to generate interferences with Signal Generator and confirm RF circuit sensitivity
- Capable of pre-EMC compliance tests

Specification

- Connector: SMA female
- High frequency RF SMA Male-Male included
- Type: H-loop near field
- Characterized response: 20MHz to 7Ghz
- RoHS compliant

Package contents


- 1 x RFEAH-25 H-loop near field antenna
- 1 x Semirigid SMA Male-Male RG402 10cm 6GHz cable



Applications

- **Detect radiation**: Easily determine the electronic component or PCB signal track creating a wanted or unwanted RF radiation.
- **Sniff and measure**: Follow signal path in any RF or high speed digital circuit, with no need to actually contact the circuit itself.
- **Find bugs**: Thanks to great spatial resolution, it is ideal antenna to check for RF bugs such as hidden cameras or microphones in a room.
- **Diagnose EMI**: Check any electronic device for RF radiation limits. This may include a connector with leakage, a module creating interference in a drone or RC plane, an oscillator or crystal that may not be working at the right frequency, etc.
- **Pre-compliance EMC testing**: Help on finding possible sources of interference in a design before passing an expensive EMC lab test for approval EU / FCC.
- Create interference: it can be used to introduce RF interference in specific areas of a circuit or device, to check on side effects as well as diagnose root cause of intermittent problems.
 Connect it to a Signal Generator and use CW or Frequency Sweep to check how your circuit respond.
- Multi-tool: RFEAH-25 can be used with RF Explorer Spectrum Analyzer and Signal Generator. But
 it can be used with any spectrum analyzer brand, as well as oscilloscopes. It is DC decoupled up
 to 25V so pretty much risk free if makes contact with the PCB circuit under test.

To correctly use the antenna and receive maximum sensitivity, please observe the following suggestions:




The H-Loop antenna works basically as an inductive coil, capturing magnetic flux.

Therefore, it should be oriented in such a way the maximum magnetic field is captured.

In most cases, that means you should place the antenna vertical to the signal trace, as show in this picture.




Avoid using the antenna orthogonally to a signal trace, as otherwise will mostly miss the magnetic field involved and will present very low sensitivity.

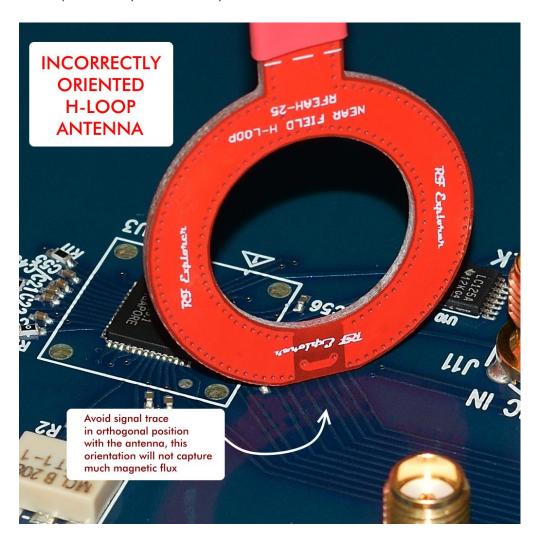




Characterized Frequency Response

Coupling data graph provided include response for two different FR4 PCB thickness (0.064" and 0.022"), tested and calibrated with a 50ohm impedance Microstrip signal trace, using SOLT calibrated VNA. This approach provides a repeatable, quality coupling calibration data set to efficiently use the antenna for PCB signal measurements.

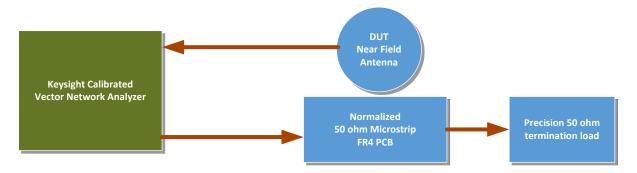


The antenna must be vertical 90 degrees against PCB signal trace, at 0mm distance, parallel horizontal orientation to signal trace for maximum sensitivity of the magnetic flux, as depicted below.

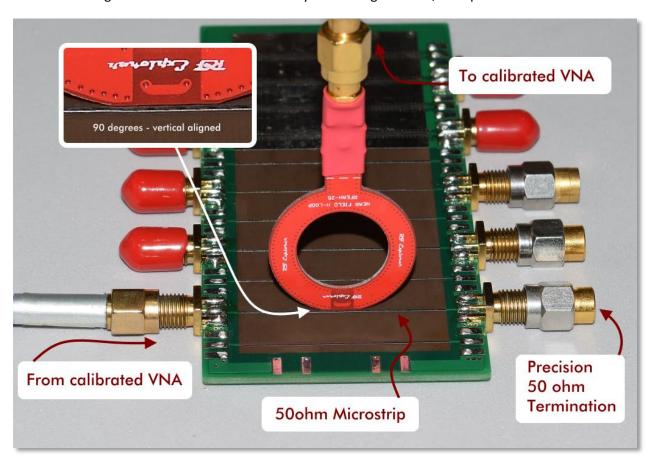




Coupling 20-250MHz

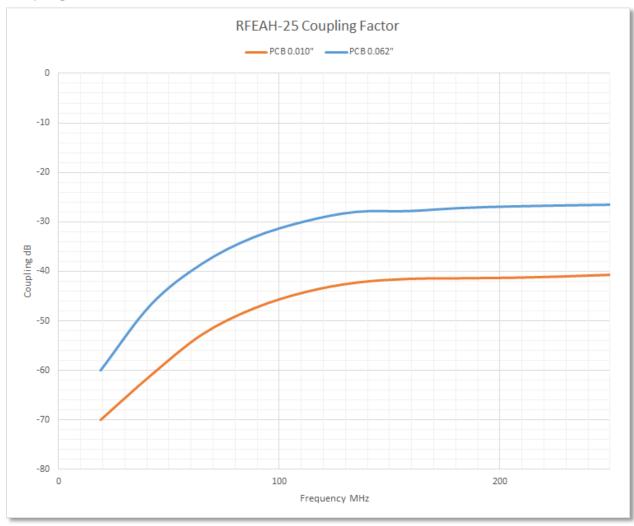




Coupling 1000MHz

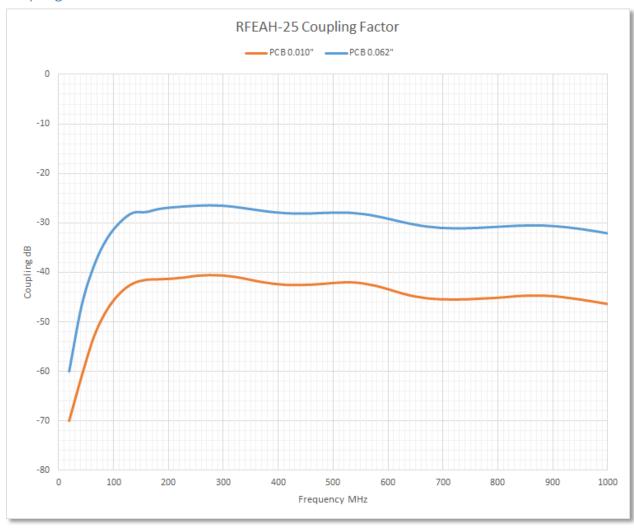



Coupling 7GHz

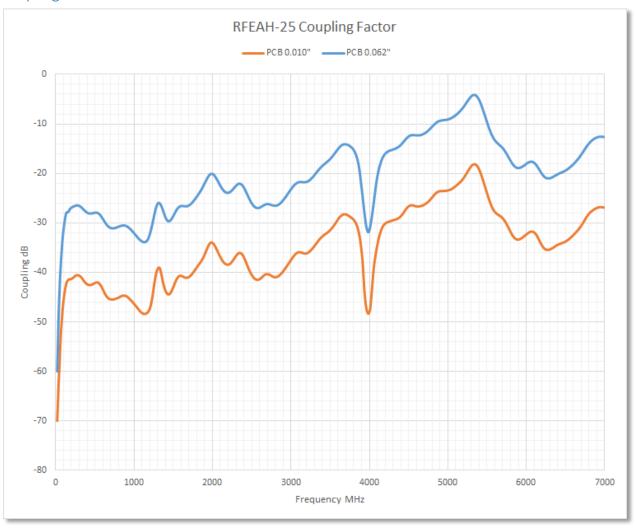



Revision History

Version	Date	Comments
0.1 DRAFT	2016-11-01	Preliminary version including calibrated coupling data
1.0	2016-11-29	Final version with corrected graphical chart data

Table of Contents

Description	1
Features	
Specification	
Package contents	
Applications	
Characterized Frequency Response	
Coupling 20-250MHz	
Coupling 1000MHz	7
Coupling 7GHz	8
Revision History	c

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Antennas category:

Click to view products by Seeed Studio manufacturer:

Other Similar products are found below:

GAN30084EU 930-033-R GW17.07.0250E 1513563-1 EXE902SM APAMPG-117 MAF94383 W3908B0100 W6102B0100 YE572113-30RSMM 108-00014-50 66089-2406 SPDA17RP918 A09-F8NF-M A09-F5NF-M RGFRA1903041A1T W3593B0100 W3921B0100 SIMNA-868 SIMNA-915 SIMNA-433 W1044 W1049B090 A75-001 WTL2449CQ1-FRSMM CPL9C EXB148BN 0600-00060 TRA9020S3PBN-001 Y4503 GD5W-28P-NF MA9-7N GD53-25 GD5W-21P-NF C37 MAF94051 MA9-5N EXD420PL B1322NR QWFTB120 MAF94271 MAF94300 GPSMB301 FG4403 AO-AGSM-OM54 5200232 MIKROE-2349 WCM.01.0111 MIKROE-2393 MIKROE-2352