

## 4 inputs data logger thermometer

**Record to 4 simultaneous temperatures with K, J, E, T type thermocouple.**

**New**

SEFRAM 9814 is the new data logger thermometer with 4 inputs. It's compatible with thermocouple type K, J, E and T. The tilt stand makes the measurement viewing easy when the thermometer is set down on a desk. The large LCD backlight screen enable to read the data in any environment. The fast sample rate allows to capture fast temperature changes.

SEFRAM 9814 is provided with USB interface enable to collect and process the data with provided software PC.

### Application :

- Compact and easy to use
- High precision in measurement
- Alarms setup possible


### Features

- T1-T2 function
- Hold function
- Alarm function
- Adjustable auto-power off time
- Fast response time with high accuracy
- Thermocouple types K, J, E and T
- Min / Max / Avg measurements on each channel
- USB interface, PC software provided
- Large backlight LCD screen:  
All channels displayed simultaneously
- 16,000 data logger records each channel
- Recall function (to 100 instant save-readings storage)



SEFRAM 9814

## A free data processing software provided with your device

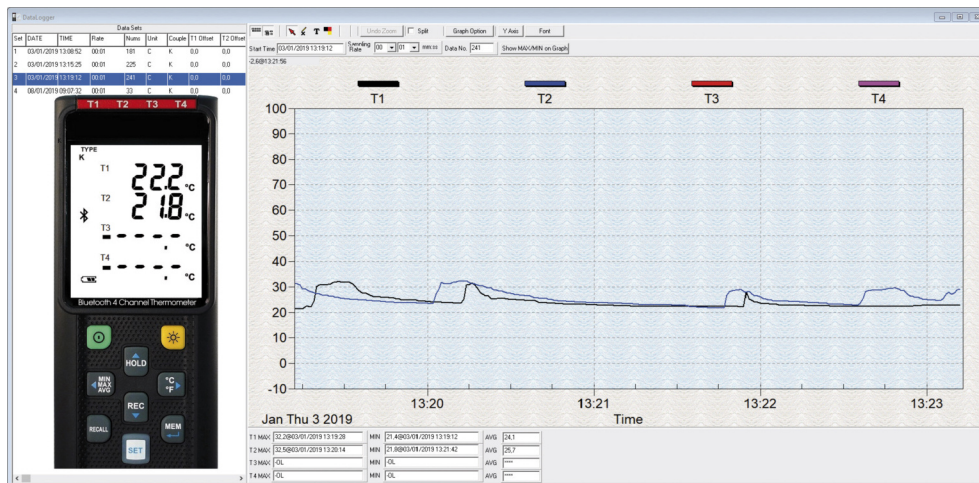

- Remote control via USB interface
- Graphic display for each channel
- Min/Max/Avg indicators for each channel
- Graphic or tabular datas saves

This software enable to collect real time data via USB interface, which will preserve the batteries and the storage capacity of your device.

Technical specifications		SEFRAM 9814
Temperature range		K: -200°C ~1372°C (- 328°F ~ 2501°F) J: -200°C~1000°C (- 328°F ~ 1832°F) E: -200°C~750°C (- 328°F ~ 1382°F) T: -200°C~400°C (-328 °F ~ 752°F)
Resolution		0.1°C < 600°C / 0.1°F < 1000°F, 1°C ≥ 600°C / 1°F ≥ 1000°F
Accuracy		Accuracy is specified for ambient temperatures between 18°C (64°F) and 28°C (82°F). The specifications do not include thermocouple sensor error. ±(0.1% of reading+0.7°C) ±(0.1% of reading+1.4°F) below -100°C (-148°F) ±(0.4% of reading +0.7°C) ±(0.4% of reading +1.4°F)
Temperature coefficient		0.01% of reading + 0.05°C per °C (<18°C or >28°C)
Sample rate		2 time per second
Battery type		UM-4 or AAA 1.5V battery x 4
Battery lifetime		Approx. 100 hours
Operation temperature		0°C to 50°C (32°F to 122°F)
Operation humidity		10 to 90%RH (no condensing)
Storage temperature		-20°C à 60°C (-4°F à 140°F)
Storage humidity		10 to 75%RH
Dimensions		187mm (L) x 75mm (W) x 29mm (H)
Weight		Approx. 290g
Warranty		1 year

**Standard accessories :** Battery 1.5V AAA x 4 pcs, Windows software, micro USB cable, K type bead probe x 2 pcs, carrying case.



FTSEFRAM9814AN00 - Specifications can be updated without notice



32, rue Edouard Martel - B.P. 55 - 42009 - St Etienne cedex 2  
**Tel. +33 (0).4.77.59 36 81**  
 Fax. +33 (0).4.77.57.23.23  
 Website : [www.sefram.fr](http://www.sefram.fr) - e-mail : [sales@sefram.fr](mailto:sales@sefram.fr)

### For assistance and ordering

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Environmental Test Equipment](#) category:*

*Click to view products by [Sefram](#) manufacturer:*

Other Similar products are found below :

[CW40](#) [F150C10E3DRT](#) [F150LRS](#) [2740212](#) [2837806](#) [4328074](#) [4366444](#) [S-11](#) [382153](#) [700PTP-1](#) [12420](#) [H115](#) [H300](#) [F150-SLC50](#)  
[DEM701](#) [HS115](#) [12008761](#) [DT-9851M](#) [DT-321S](#) [WY-HIC401BC802JK](#) [NT-311](#) [NT-312](#) [A13T](#) [A37](#) [VICTOR 230D](#) [A61](#) [W22940](#)  
[6921734990129](#) [6921734990112](#) [STHT0-77365](#) [SEFRAM9892](#) [1100-PT100001](#) [STHT77649-1](#) [STHT77648-1](#) [STHT1-77409](#) [MAGNES DO](#)  
[ST-140](#) [AKCELEROMETR DO ST-140](#) [LM120A](#) [1-77-023](#) [1-77-132](#) [UT305S](#) [TM-751](#) [SEFRAM9891](#) [STHT77498-1](#) [FMHT0-77422](#) [0-](#)  
[77-030](#) [STHT0-77363](#) [EL-PDF-1-002](#) [STHT77065-0](#) [FLK-SMFT-1000/PRO](#)