

SEI-110-02-GF-S-E-TR

SEI-120-02-GF-S

SIBF-10-F-S-AD

SIBF-25-F-S-AD

SIBF-05-F-S-AD

(1.00 mm) .0394" (SEI) (1.27 mm) .050" (SIBF)

SEI, SIBF SERIES

ONE-PIECE INTERFACE

SPECIFICATIONS

For complete specifications and recommended PCB layouts see www.samtec.com?SEI or see www.samtec.com?SIBF

Insulator Material:

SEI = Liquid Crystal Polymer
SIBF = Black Liquid Crystal Polymer

Contact Material:

Phosphor Bronze

Plating:

SEI = Au over 50 μm (1.27 μm) Ni
SIBF = Au or Sn over 50 μm (1.27 μm) Ni

Current Rating:

SEI = 2.3 A per pin (1 pin powered)
SIBF = 2.5 A per pin (1 pin powered)

Operating Temp Range:

-55 °C to +125 °C

Mating Force:

SEI = 50 g (0.49 N) per contact

Voltage Rating:

SEI = 250 VAC
SIBF = 155 VAC

Cycles:

SEI = 100 min

Contact Deflection:

SEI = (0.46 mm) .018" nominal

RoHS Compliant:

Yes

PROCESSING

Lead-Free Solderable:

Yes

SMT Lead Coplanarity (SEI):

(0.10 mm) .004" max (05-25)

(0.15 mm) .006" max (30)*

* (.004" stencil solution may be available; contact IPG@samtec.com)

SMT Lead Coplanarity (SIBF):

(0.10 mm) .004" max (05-20)

(0.15 mm) .006" max (25)*

* (.004" stencil solution may be available; contact IPG@samtec.com)

RECOGNITIONS

For complete scope of recognitions see www.samtec.com/quality




05, 10, 15,
20, 25, 30
(Standard sizes)

-G
= 10 μm (0.25 μm) Gold
-GF
= 3 μm (0.08 μm) Gold flash

Leave blank for Short Version (No screw down inserts or holes)
-E
= #2-56 x 1/16" screw thread
-M
= 2.00 mm x 0.40 mm screw thread

Leave blank for no Alignment Pin
-AT
= Alignment Pin Top Side
-AB
= Alignment Pin Bottom Side


-TR
= Tape & Reel

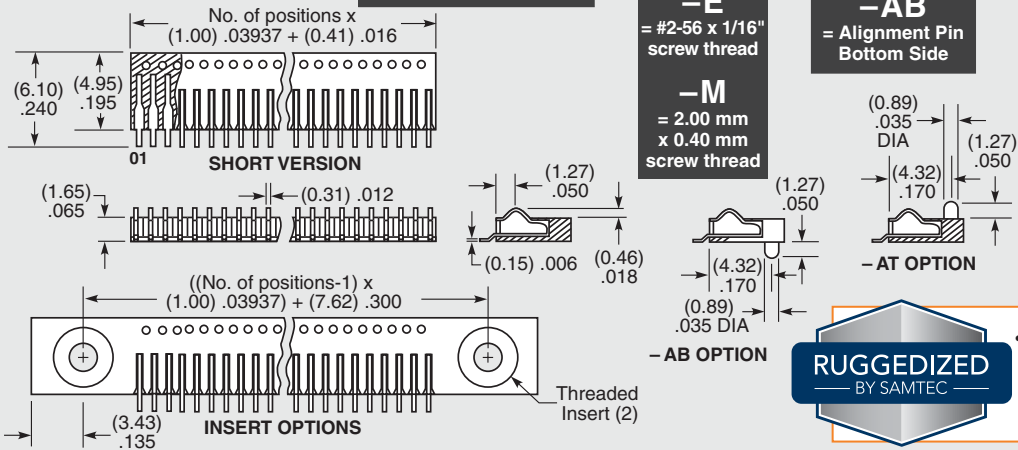

-05, -10, -20, -25

-F
= Flash Gold, Matte Tin on tail

-AD
= Top & Bottom Alignment Pin

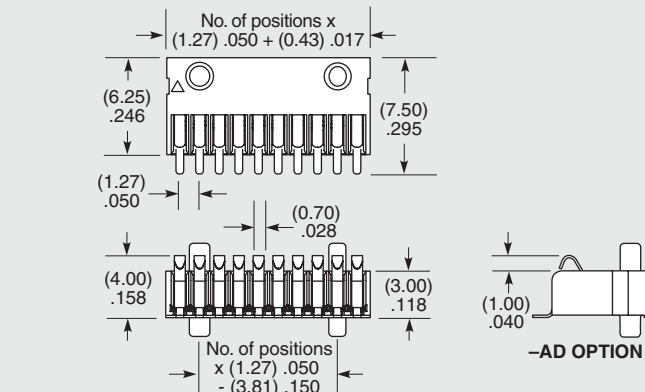

ALSO AVAILABLE (MOQ Required)

- Additional positions
- Top or bottom side only alignment pin

Due to technical progress, all designs, specifications and components are subject to change without notice.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Board to Board & Mezzanine Connectors](#) category:

Click to view products by [Samtec](#) manufacturer:

Other Similar products are found below :

[10135583-642402LF](#) [89885-310LF](#) [589158040000018](#) [6-1393048-0](#) [68683-613](#) [MDF7-12DP-2.54DSA](#) [MDF7-18P-2.54DSA\(01\)](#) [MDF7-20DP-2.54DSA](#) [MDF7-26D-2.54DSA\(55\)](#) [MDF7-3P-2.54DSA\(01\)](#) [MDF7B-3P-2.54DSA\(55\)](#) [MDF7C-11P-2.54DSA\(55\)](#) [MDF7C-18P-2.54DSA\(55\)](#) [MDF7C-5P-2.54DSA\(01\)](#) [MDF7P-5P-2.54DSA\(55\)](#) [75234-0516](#) [FCN-230C068-11](#) [FCN-268F012-G/BD](#) [FCN-268F036-G/BD](#) [FCN-268M012-G/0D](#) [FCN-268M024-G/1D](#) [FCN-360C008-C](#) [FCN-360C040-C](#) [FCN-723J004/1](#) [MIS-048-01-F-D-DP-K](#) [832-10-034-10-001000](#) [93696-325LF](#) [11828-1FA](#) [AXK630345P](#) [18097-0013](#) [ICA-328STT](#) [2007042-2](#) [304400-2](#) [FCN-214Q030-G/0](#) [FCN-215Q040-G/0](#) [FCN-230C068-ESA](#) [FCN-234P048-G/0](#) [FCN-235D050-G/C](#) [FCN-360A3](#) [FCN-360C040-B](#) [210-93-314-41-105000](#) [2-22603-0](#) [379-064-521-202](#) [MDF7-12P-2.54DSA\(01\)](#) [MDF7-16P-2.54DS\(56\)](#) [MDF7-40DP-2.54DSA\(55\)](#) [MDF7-8P-2.54DSA\(55\)](#) [MDF7B-16P-2.54DSA\(55\)](#) [AXG720047](#) [5031084030](#)