



96 x 96mm

Features :

- 3Ø Power (Active, Reactive)
- 3Ø Power Factor
- Energy (Active, Reactive, Apparent)
- Programmable CT / PT Primary / Secondary
- Modbus RTU Communication (RS485) (Optional)
- Single Pulse Output

Certifications : CE 

Display Specifications

Display	LCD with Backlight
Digits	8
Digit Height	10.5mm

Input Specifications

Electrical Connection	3Ø - 3 wire, 3Ø - 4 wire, 2Ø - 3 wire, 1Ø - 2 wire
Input Voltage	11 to 300V AC (L - N) 19 to 519V AC (L - L)
Input Current	Nominal 5A AC (Min - 11mA, Max - 6A)
Measurement Range	99999999
Frequency	45 to 65Hz
Power Consumption	8VA max
Display Reset	Programmable (For energy)
Resolution	For energy : 0.01k, 0.1k, 1k, 0.01M, 0.1M, 1M, 10M (depending upon CT ratio x PT ratio)
Accuracy	Power (Active, Reactive) : ±1% Energy (Active, Reactive, Apparent) : Class1 Power Factor & AVG Power Factor : ±1%
Memory Retention	10 years (For energy)
Measuring Parameters	Active, Reactive & Apparent Energy (Individual), Power Factor (Individual / Average), Active Power & Reactive Power (Total)

Output Specifications

Pulse Output	Voltage Range : External 24V DC Current Capacity : 100mA max Pulse Width : 100ms ±5ms
Communication Interface and Protocol	RS485 and MODBUS RTU
Communication Address	1 to 255
Transmission Mode	Half duplex
Transmission Distance	500 meter maximum
Transmission Speed	300, 600, 1200, 2400, 4800, 9600, 19200 (in bps)
Parity	None, Odd, Even
Stop Bits	1 or 2
Response Time	100ms (max and independent of baud rate)

Supply Specifications

Supply Voltage	100 to 240V AC, -15% to +12%, 50 / 60 Hz (±5%)
----------------	--

Settable Parameters

CT Primary	1 / 5A to 10kA (Programmable for any value)
CT Secondary	1 / 5A (External CT must be connected for current more than 5A)
PT Primary	100V to 500kV (Programmable for any value)
PT Secondary	100V to 500V AC (L - L) (Programmable for any value)


Environmental Specifications

Temperature	Operating : -10° to 55°C Storage : -20° to 75°C
Humidity (non - condensing)	Upto 85% RH


Mechanical Specifications

Mounting	Panel
Weight	302gms

Dimensions

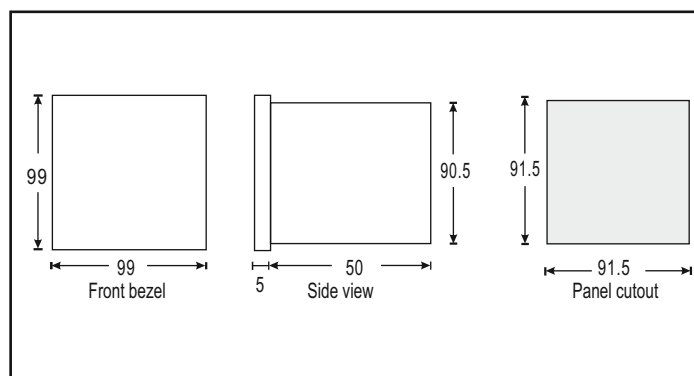

Terminal Connection

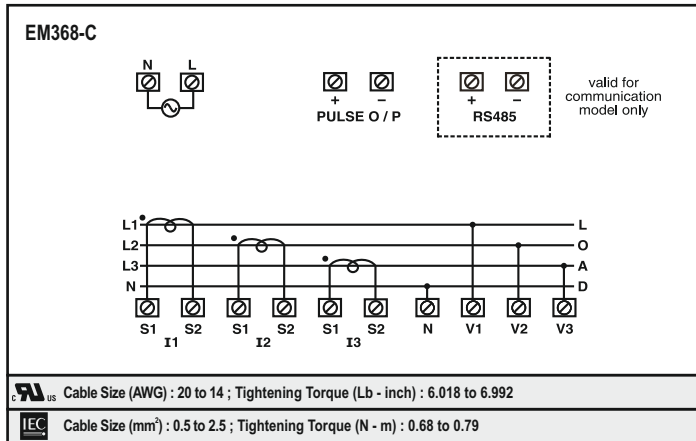

Compliance

Applicable EMI / EMC Standards		
Product Standard : IEC 61326 - 1		
Category		Standards Compliance
ESD Immunity	IEC 61000 - 4 - 2	Level IV (Air Discharge : 15kV), (Contact Discharge : -8kV)
Surge Immunity	IEC 61000 - 4 - 5	+ / - 2kV Common Mode, (Line to Ground) + / - 1kV Differential Mode, (Line to Line)
Radiated Susceptibility	IEC 61000 - 4 - 3	Level III, 80 to 1000MHz (10V / m) Level II, 1.4GHz to 2GHz (3V / m) Level I, 2GHz to 2.7GHz (1V / m)
Conducted Susceptibility	IEC 61000 - 4 - 6	Level II (3V / m)
Voltage Dips and Interruptions	IEC 61000 - 4 - 11	Dips : 0% residual voltage / 1 cycle (Criteria B), 40% residual voltage / 10 cycles 50Hz / 12 cycles 60Hz (Criteria C) 70% residual voltage / 25 cycles 50Hz / 30 cycles 60Hz (Criteria C) Interruptions : 0% residual voltage / 250 cycles 50Hz / 300 cycles 60Hz (Criteria C)
Conducted Emission	CISPR - 11	
Radiated Emission	CISPR - 11	
Electrical Fast Transient	IEC 61000 - 4 - 4	Level III (2kV)

Ordering Information

Product Code	Supply Voltage	Output		Certification	
	100 to 240V AC	Pulse Output	Comm. (RS485)	CE	UL LISTED
EM368-CU	Yes	Yes	--	CE	UL LISTED
EM368-C-CU	Yes	Yes	Yes	CE	UL LISTED

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Digital Panel Meters](#) category:

Click to view products by [SELEC](#) manufacturer:

Other Similar products are found below :

[M00558-00](#) [70.360.4828.0](#) [72331-00](#) [85310-25](#) [86642-00](#) [87268-13](#) [87316-00](#) [87719-26](#) [98107-56](#) [HB8260-R36-90](#) [DMS-20ACV-3-R-C](#)
[EM11DINAV81XR1X](#) [25.325.3253.1](#) [25.325.4253.1](#) [25.330.0453.1](#) [20046-20](#) [20182-23](#) [AP1021](#) [25.320.5053.0](#) [25.350.3453.1](#)
[25.394.3653.1](#) [25.521.3253.0](#) [28006-01](#) [04.630.1080.0](#) [20078-20](#) [EM11DINAV81XO1X](#) [85874-26](#) [87166-00](#) [87895-00](#) [28000-03](#) [82322K-](#)
[11](#) [86641-00](#) [87004-00](#) [HB8280R2490](#) [HB8260R4890](#) [SCE016MD3MV0W10](#) [20125-21](#) [86640-00](#) [PG-100-103GP](#) [PG-100-102RP](#) [PG-](#)
[100B-102R-H](#) [PG-100B-103R](#) [PG-100B-102R](#) [PG-100N-103R-W](#) [PG-100N-103R](#) [PG-100N-102R](#) [PG-100-102GH](#) [PG-100-103RP](#) [PG-](#)
[100B-103R-M](#) [PG-100-102VP](#)