




Features:

- True RMS Measurement
- For 1 Phase 2 Wire Electrical Network

Certifications: CE 

Display Specifications

Display	Single row, 7 segment LED Display
Digits	3 Digit
Digit Height	0.56" (14.2mm)
Display Range	0 - 516V

Input Specifications

Electrical Connection	1 Ø-2 wire
Input Type	AC
Input Voltage Range	50-480V
Continuous Max. Input Rating	516V
Overrange Indication	"Or" for input > 516V
Frequency	50 / 60Hz
Resolution	1V
Accuracy	±0.5% of F.S
Input Impedance	1MΩ (± 5%)
Sampling Rate	3 samples / second
Dielectric withstand Voltage	2kV AC between auxiliary supply & measuring input
Rated Impulse withstand Voltage	3.5kV (1.2/50µS)

Auxiliary Supply Specifications

Auxiliary Supply	AC: 240V AC ± 20%, (50 / 60Hz) 110V AC ± 20%, (60Hz)
Power Consumption	5VA max


Environmental Specifications

Temperature	Operating: -10 to +55°C (14 to 131°F) Storage: -20 to +75°C (-4 to 167°F)
Humidity (non-condensing)	Up to 95% RH


Mechanical Specifications

Mounting	Panel mount
Weight	170 gms (0.374 lbs)

Dimensions

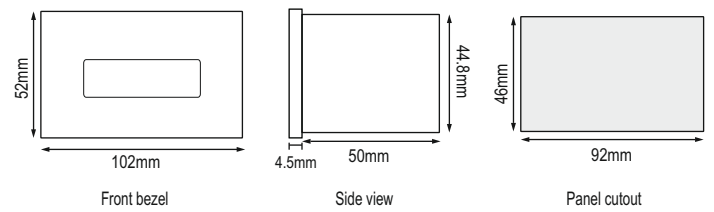

Terminal Connections

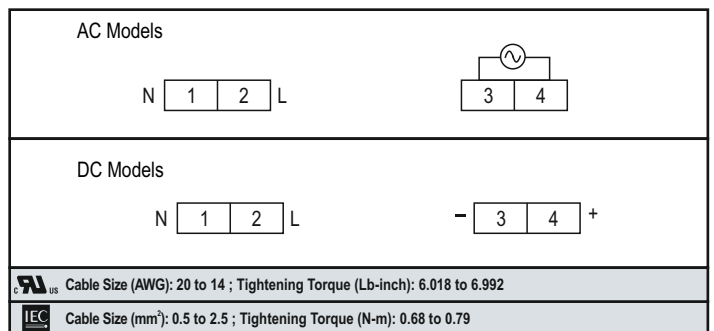

Compliance

Applicable EMI / EMC Standards		
Product Standard : IEC 61326-1		
Category		Standards Compliance
ESD Immunity	IEC 61000-4-2	Level IV (Air discharge : 15kV), (Contact Discharge : -8kV)
Surge Immunity	IEC 61000-4-5	+/- 2kV common mode, (Line to ground) +/- 1kV differential mode, (Line to Line)
Radiated Susceptibility	IEC 61000-4-3	Level III, 80 to 1000MHz (10V/m) Level II, 1.4GHz to 2GHz (3V/m) Level I, 2GHz to 2.7GHz (1V/m)
Conducted Susceptibility	IEC 61000-4-6	Level II (3V/m)
Voltage Dips and Interruptions	IEC 61000-4-11	Dips : 0% residual voltage / 1 cycle (Criteria B), 40% residual voltage / 10 cycles 50Hz / 12 cycles 60Hz (Criteria C) 70% residual voltage / 25 cycles 50Hz / 30 cycles 60Hz (Criteria C) Interruptions : 0% residual voltage / 250 cycles 50Hz / 300 cycles 60Hz (Criteria C)
Conducted Emission	CISPR-11	
Radiated Emission	CISPR-11	
Electrical Fast Transient	IEC 61000-4-4	Level III (2kV)

Ordering Information

Product Code	Supply Voltage		Certification	
	240V AC	110V AC	CE	UL LISTED
MV15	■			
MV15-CE	■		■	
MV15-230V-CE	■		■	
MV15-AC-20/200V	■			
MV15-AC-200/2000mV	■		■	■
MV15-DC-2V	■			
MV15-DC-20V	■			
MV15-DC-20V-110V-CU		■	■	■
MV15-DC-200V	■			
MV15-DC-200V-110V		■		
MV15-DC-200V-110V-CU		■	■	■
MV15-DC-200mV	■			

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [SELEC manufacturer](#):

Other Similar products are found below :

[SPCT 100/60 600/5 A VA 7.5 CL 1](#) [SPCT 62/30 60/5A VA1 CL 3](#) [SPCT 62/40 160/5 A VA 1.5 CL 1](#) [SPCT 62/40 250/5 A VA 3 CL 1](#) [SPCT 62/40 300/5 A VA 3 CL 0.5](#) [SCL-AM-I-2-100/5A](#) [SCL-AM-I-2-1000/5A](#) [SCL-AM-I-2-30/5A](#) [SCL-AM-I-2-300/5A](#) [SCL-AM-I-2-400/5A](#) [SCL-AM-I-3-200/5A](#) [SCL-AM-I-3-30/5A](#) [SCL-AM-I-3-400/5A](#) [SCL-AM-I-3-800/5A](#) [AM-I-2-5-CE](#) [APFC146-112-90/550V-CE](#) [APFC147-108-90/550V-CE](#) [APFC148-312-90/550V-CE](#) [APFC347-108-230V-CE-ROHS](#) [SMRD4M1-2-U-CE](#) [IPCOVER-3](#) [EM368-C-CU](#) [EM4M-3P-C-100A](#) [MFM284-C-CE](#) [XC1200-CU](#) [XC3200-CE-ROHS](#) [XTC5400-CU](#) [SPCT 100/60 1200/5A VA 15 CL 0.5](#) [SPCT 100/60 1000/5A VA 15 CL 0.5](#) [SPCT 100/60 600/5 A VA 5 CL 0.5](#) [SPCT 100/60 800/5 A VA 10 CL 0.5](#) [SPCT 140/100 1200/5A VA 15 CL 0.5](#) [SPCT 140/100 1250/5A VA 15 CL 0.5](#) [SPCT 140/100 1500/5A VA 15 CL 0.5](#) [SPCT 140/100 1600/5A VA 15 CL 0.5](#) [SPCT 140/100 1000/5A VA 15 CL 0.5](#) [SPCT 140/100 2500/5A VA 15 CL 0.5](#) [SPCT 140/100 2000/5A VA 15 CL 0.5](#) [SPCT 140/100 3000/5A VA 15 CL 0.5](#) [SPCT 140/100 800/5A VA 15 CL 0.5](#) [SPCT 62/30 75/5A VA1 CL 3](#) [SPCT 62/30 75/5A VA3 CL 3](#) [SPCT 62/40 125/5 A VA 1 CL 1](#) [SPCT 62/40 200/5 A VA 2,5 CL 0,5](#) [SPCT 62/40 200/5 A VA 3 CL 1](#) [SPCT 62/40 400/5 A VA 3.75 CL 0.5](#) [SCL-AM-I-2-1600/5A](#) [SCL-AM-I-2-60/5A](#) [SCL-AM-I-2-600/5A](#) [SCL-AM-I-2-75/5A](#)