

## FEATURES

- Glass passivated junction.
- 1500W Peak Pulse Power capability at 1.0 ms.
- Excellent clamping capability.
- Low incremental surge resistance.
- Fast response time; typically less than 1.0 ps from 0 volts to BV for unidirectional and 5.0 ns for bidirectional.
- Typical  $I_R$  less than 1.0  $\mu$ A above 10V.


**DO-201AE**

## MECHANICAL DATA

- Case: Molded plastic
- Lead: Pure tin plated lead free, solderable per MIL-STD-202, Method 208.
- Polarity : Color band denotes cathode except bipolar.
- Weight : 0.968 gram.

## DEVICES FOR BIPOLAR APPLICATIONS

- Bidirectional types use CA suffix.
- Electrical Characteristics apply in both directions.

## MAXIMUM RATINGS AND CHARACTERISTICS

Ratings at 25 ambient temperature unless otherwise specified.

Type Number	Symbol	Value	Units
Peak Power Dissipation at $T_A= 25^{\circ}\text{C}$ , $T_p= 1\text{ms}$ (Note 1)	$P_{PPK}$	Minimum 1500	Watts
Steady State Power Dissipation at $T_L= 75^{\circ}\text{C}$ Lead Lengths 0.375 Inch 9.5mm (Note 2)	$P_D$	5.0	
Peak Forward Surge Current, 8.3ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method) (Note 3)	$I_{FSM}$	200	Amps
Maximum Instantaneous Forward Voltage at 100A for Unidirectional Only (Note 4)	$V_F$	3.5 / 5.0	Volts
Operating and Storage Temperature Range	$T_J, T_{STG}$	-55 to + 175	$^{\circ}\text{C}$

Notes: Notes: 1. Non-repetitive current pulse and derated above  $T_A= 25^{\circ}\text{C}$ .


2. Mounted on copper pad area of 1.6 x 1.6 inch (40 x 40mm) per.

3. 8.3ms single half sine-wave or equivalent square wave, duty cycle = 4 pulses per minutes maximum.


4.  $V_F= 3.5\text{V}$  for devices of  $V_{BR} \leq 200\text{V}$  and  $V_F= 5.0\text{V}$  maximum for devices of  $V_{BR} > 200\text{V}$ .

**PACKAGE DIMENSIONS**

**DO-201AE**

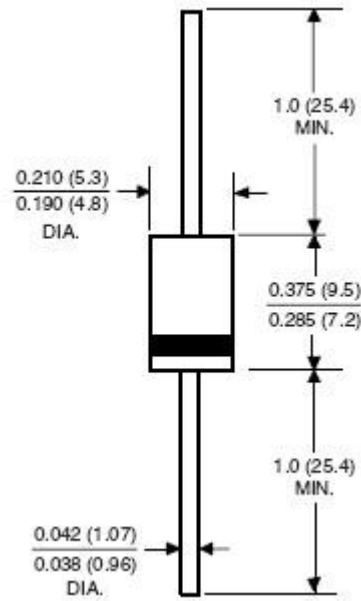

**ORDERING INFORMATION**

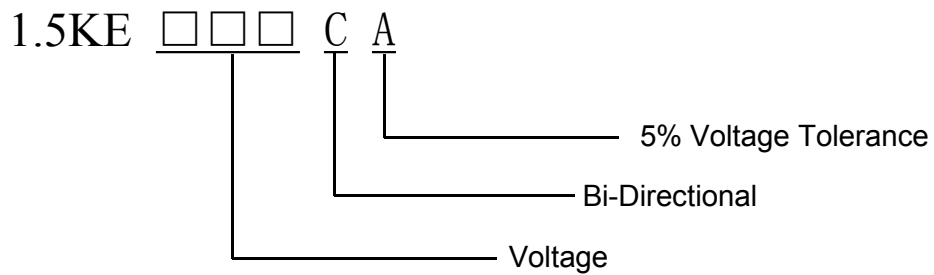

**PACKAGING**

Part Number	Component Package	Quantity
1.5KExxxA/CA	DO-201AE	1000

**ELECTRICAL CHARACTERISTICS**

1.5KE DEVICES	REVERSE STAND-OFF VOLTAGE $V_{RWM}(V)$	BREAKDOWN VOLTAGE Min. @ $I_T$ $V_{BR}$ Min. (V)	BREAKDOWN VOLTAGE Max. @ $I_T$ $V_{BR}$ Max. (V)	TEST CURRENT $I_T(mA)$	MAXIMUM CLAMPING VOLTAGE @ $I_{pp}$ $V_C(V)$	PEAK PULSE CURRENT $I_{pp}(A)$	REVERSE LEAKAGE @ $V_{RWM}$ $I_R(\mu A)$
1.5KE6.8CA/A	5.80	6.45	7.14	10	10.5	144.8	1000
1.5KE7.5CA/A	6.40	7.13	7.88	10	11.3	134.5	500
1.5KE8.2CA/A	7.02	7.79	8.61	10	12.1	125.6	200
1.5KE9.1CA/A	7.78	8.65	9.55	1	13.4	113.4	50
1.5KE10CA/A	8.55	9.50	10.50	1	14.5	104.8	10
1.5KE11CA/A	9.40	10.50	11.60	1	15.6	97.4	5
1.5KE12CA/A	10.20	11.40	12.60	1	16.7	91.0	5
1.5KE13CA/A	11.10	12.40	13.70	1	18.2	83.5	1
1.5KE15CA/A	12.80	14.30	15.80	1	21.2	71.7	1
1.5KE16CA/A	13.60	15.20	16.80	1	22.5	67.6	5
1.5KE18CA/A	15.30	17.10	18.90	1	25.2	60.3	5
1.5KE20CA/A	17.10	19.00	21.00	1	27.7	54.9	1
1.5KE22CA/A	18.80	20.90	23.10	1	30.6	49.7	1
1.5KE24CA/A	20.50	22.80	25.20	1	33.2	45.8	1
1.5KE27CA/A	23.10	25.70	28.40	1	37.5	40.5	1
1.5KE30CA/A	25.60	28.50	31.50	1	41.4	36.7	1
1.5KE33CA/A	28.20	31.40	34.70	1	45.7	33.3	1
1.5KE36CA/A	30.80	34.20	37.80	1	49.9	30.5	1
1.5KE39CA/A	33.30	37.10	41.00	1	53.9	28.2	1
1.5KE43CA/A	36.80	40.90	45.20	1	59.3	25.6	1
1.5KE47CA/A	40.20	44.70	49.40	1	64.8	23.5	1
1.5KE51CA/A	43.60	48.50	53.60	1	70.1	21.7	1
1.5KE56CA/A	47.80	53.20	58.80	1	77.0	19.7	1
1.5KE62CA/A	53.00	58.90	65.10	1	85.0	17.9	1
1.5KE68CA/A	58.10	64.60	71.40	1	92.0	16.5	1
1.5KE75CA/A	64.10	71.30	78.80	1	103.0	14.8	1
1.5KE82CA/A	70.10	77.90	86.10	1	113.0	13.5	1
1.5KE91CA/A	77.80	86.50	95.50	1	125.0	12.2	1
1.5KE350CA/A	300.00	332.00	368.00	1	482.0	3.2	1
1.5KE400CA/A	342.00	380.00	420.00	1	548.0	2.8	1
1.5KE440CA/A	376.00	418.00	462.00	1	602.0	2.5	1
1.5KE480CA/A	408.0	456.0	504.0	1	658.0	2.3	1

**TYPICAL CHARACTERISTICS**

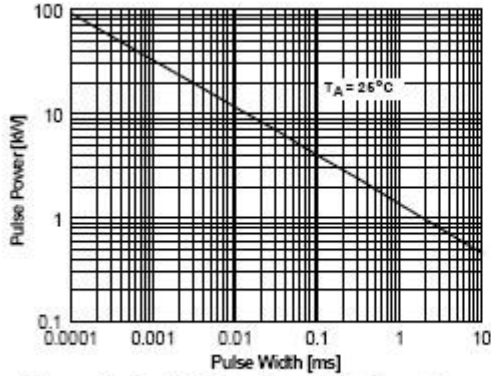


Figure 1. Peak Pulse Power Rating Curve

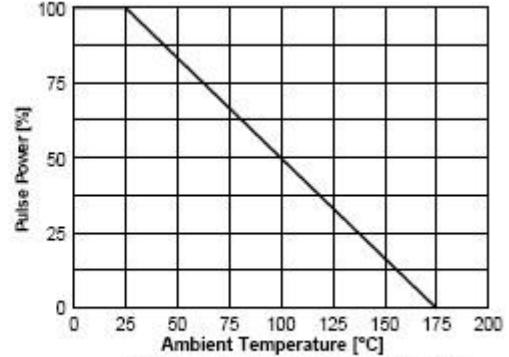


Figure 2. Pulse Derating Curve

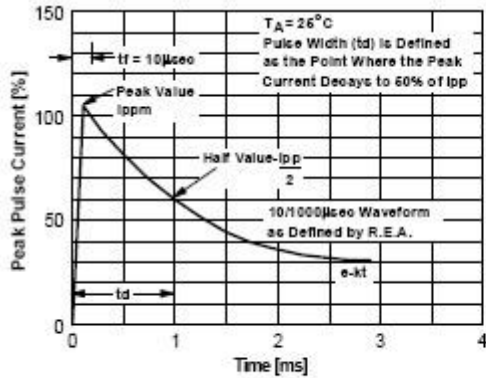


Figure 3. Pulse Waveform

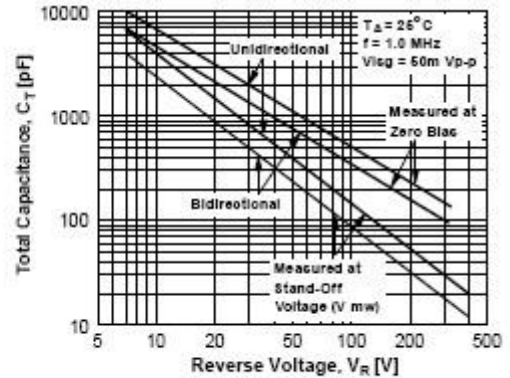


Figure 4. Total Capacitance

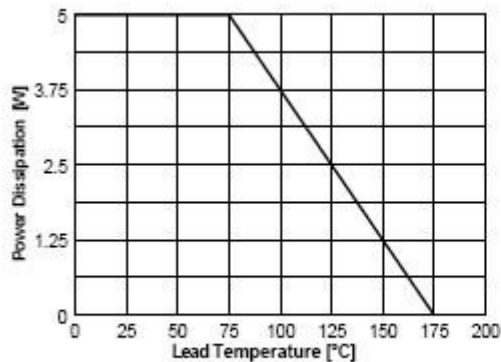


Figure 5. Steady State Power Derating Curve

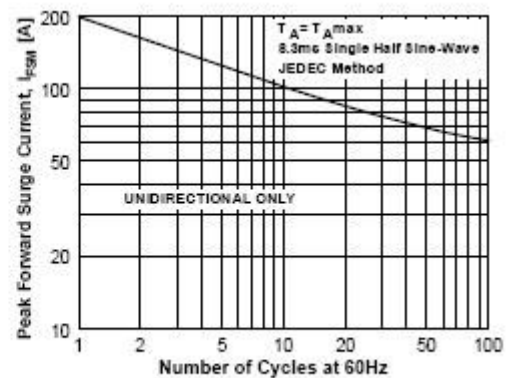


Figure 6. Non-Repetitive Surge Current

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [ESD Suppressors / TVS Diodes](#) category:*

*Click to view products by [SEMBO](#) manufacturer:*

Other Similar products are found below :

[60KS200C](#) [D18V0L1B2LP-7B](#) [D5V0F4U5P5-7](#) [NTE4902](#) [P4KE27CA](#) [P6KE11CA](#) [P6KE8.2A](#) [SA60CA](#) [SA64CA](#) [SMBJ12CATR](#)  
[SMBJ33CATR](#) [SMBJ6.5A](#) [SMBJ8.0A](#) [ESD101-B1-02ELS](#) [E6327](#) [ESD112-B1-02EL](#) [E6327](#) [ESD7451N2T5G](#) [19180-510](#) [CPDT-5V0USP-](#)  
[HF](#) [3.0SMCJ33CA-F](#) [3.0SMCJ36A-F](#) [HSPC16701B02TP](#) [JANTX1N6126A](#) [D3V3Q1B2DLP3-7](#) [D55V0M1B2WS-7](#) [SCM1293A-04SO](#)  
[ESD200-B1-CSP0201](#) [E6327](#) [SM12-7](#) [CEN955](#) [W/DATA](#) [VESD12A1A-HD1-GS08](#) [CPDQC5V0-HF](#) [D1213A-01LP4-7B](#) [ESD101-B1-02EL](#)  
[E6327](#) [AOZ8808DI-03](#) [5KP15A](#) [5KP48A](#) [5KP90A](#) [ESD3V3D7-TP](#) [15KPA36A-LF](#) [P4KE56CA](#) [P4KE68A](#) [P4KE91CATR](#) [P6KE120A](#)  
[P6KE13CA](#) [P6KE43CA](#) [P6KE6.8CA](#) [P6KE8.2](#) [P6SMBJ20CA](#) [JANTX1N6072A](#) [SR2835ESKG](#) [SA90CA](#)