

Features

- Fails short circuit when surged in excess of ratings
- Low voltage overshoot
- High repetitive surge current capability
- Low on - state voltage



**DO-214AA
(SMB)**

Main Applications


- Customer Premises Equipment (CPE)
- Modems, Line cards, DSL, ISDN, T - 1/E - 1
- Data lines and security systems
- Fax machines, Telephones etc.

Thermal Ratings

Type Number	Symbol	Value	Units
Operating Junction Temperature Range	T_J	-40 to + 150	°C
Storage Temperature Range	T_S	-65 to + 150	°C
Thermal Resistance: Junction to Ambient	$R_{\theta JA}$	90	°C/W


Package Dimensions

DO-214AA/SMB

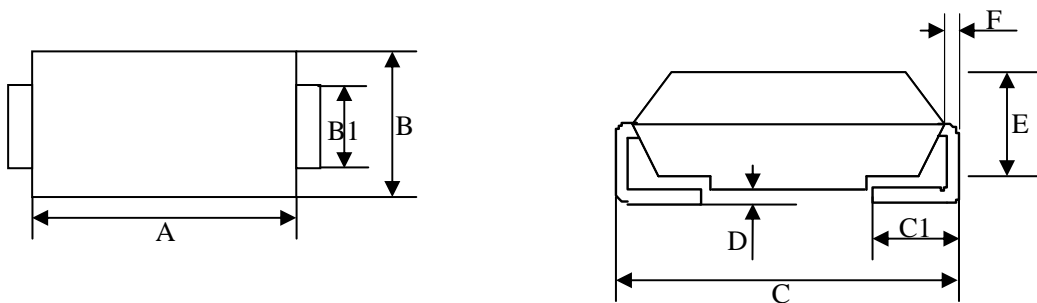

Dim		A	B	B1	C	C1	D	E	F
Millimeters (mm)	Min	4.06	3.30	1.95	5.21	0.76	-	2.13	0.152
	Max	4.57	3.94	2.20	5.59	1.52	0.203	2.44	0.305
Inches (inch)	Min	0.16	0.13	0.077	0.205	0.03	-	0.084	0.006
	Max	0.18	0.155	0.086	0.22	0.06	0.008	0.096	0.012

Ordering Information

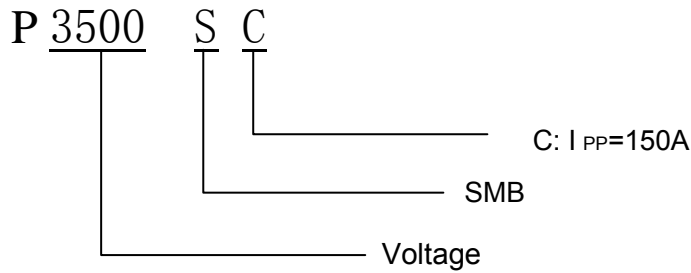

Electrical Characteristics ($T_A=25^{\circ}\text{C}$ unless noted otherwise)

Part Number	V _{DRM}	V _s	I _H	I _S	I _T	V _T	C _o	
	V min	V max	mA min	mA max	A max	V max	pF min	pF max
P3500SC	320	400	150	800	2.2	4	25	110

Note: 1. V_{DRM}@I_{DRM}=5 μ A, V_S@100V/ μ s, V_T@I_T=2.2A, C_O@1MHz,2V

Surge Ratings

Series	I _{PP} 2x10 μ s Amps	I _{PP} 8x20 μ s Amps	I _{PP} 10x160 μ s Amps	I _{PP} 10x560 μ s Amps	I _{PP} 10x1000 μ s Amps	I _{TSM} 50/60Hz Amps	di/dt A/ μ s
C	500	400	200	150	100	30	500

Note: 1. Peak pulse current rating (I_{PP}) is non - repetitive and guaranteed for the life of the product.

2. I_{PP} ratings applicable over temperature range of - 40 $^{\circ}$ C to +85 $^{\circ}$ C
3. The device must initially be in thermal equilibrium with - 40 $^{\circ}$ C < T_J < +150 $^{\circ}$ C
4. Current waveform and voltage waveform in μ s.

Typical Characteristics Curves

Fig 1. V-I Characteristics

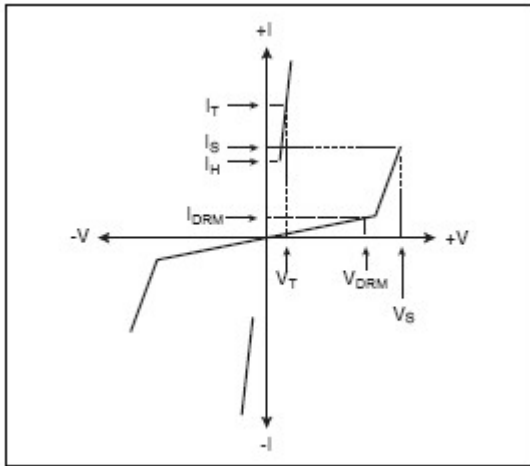


Fig 2. $t_r \times t_d$ Pulse Wave-form

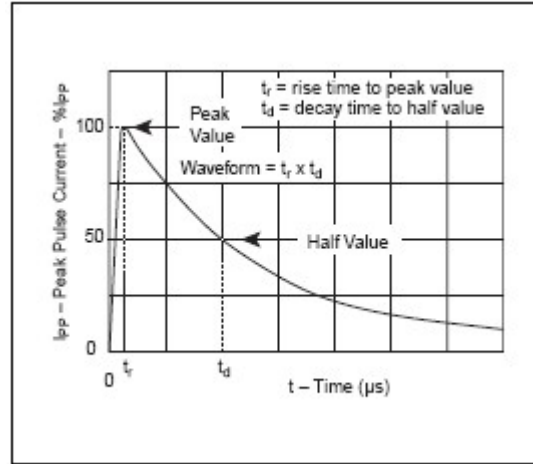


Fig 3. Normalized V_S Change versus Junction Temperature


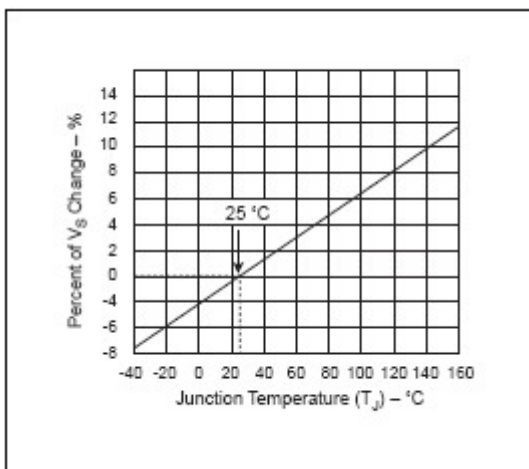


Fig 4. Normalized DC Holding Current Versus Case Temperature

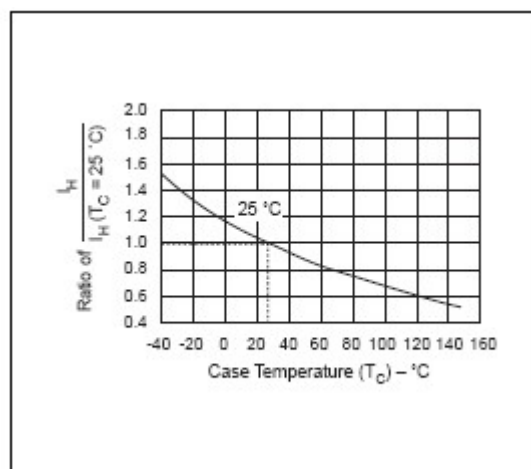

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Thyristor Surge Protection Devices - TSPD category:

Click to view products by SEMBO manufacturer:

Other Similar products are found below :

[TT700N22KOFTIMHPSA1](#) [TT820N16KOFTIMHPSA1](#) [MMT08B310T3](#) [BS4200N-2C](#) [BS0060M-3](#) [BEP4200TB](#) [BS1300N-C-F](#) [BS4200N-C-2](#) [BS4000M](#) [BEP0300SB](#) [P0080SB](#) [P0080F](#) [P3500SB](#) [P0720SC](#) [P3100SB](#) [P0720EC](#) [P4500Q22CLRP](#) [P0080SC](#) [P0640SC](#) [P4200SC](#) [P0640SB](#) [P0080SB](#) [P3100SC](#) [P4200SB](#) [P0640SC](#) [P2300SC](#) [P2300LA](#) [BS0300N-C-F](#) [BTISP61089BDR-S](#) [P1100SC](#) [SKKH 106/12E](#) [SKKH 106/18E](#) [SKKH 162/14E](#) [SKKH 57/16E](#) [SKKH 72/08E](#) [NP3100SBT3G](#) [SK20NHMH10](#) [P3800FNLTP](#) [TB2300L-13-F](#) [TISP4030L1BJR-S](#) [P4800MEL](#) [TISP4P035L1NR-S](#) [TISP4011H1BJR-S](#) [P2600SDLRP](#) [SKKH 72/16E](#) [SKKH 72/20E H4](#) [SKKH92/16E](#) [SKKH 132/16E](#) [SKKH 172/16E](#) [SKKH 106/16E](#)