

# SK 25 WT



**SEMITOP® 2**

## Antiparallel Thyristor Module

### SK 25 WT

Preliminary Data


### Features

- Compact Design
- One screw mounting
- Heat transfer and isolation through direct copper bonded aluminium oxide ceramic (DBC)
- Glass passivated thyristor chips
- Up to 1600V reverse voltage
- UL recognized, file no. E 63 532

### Typical Applications\*

- Soft starters
- Light control (studios, theaters...)
- Temperature control

$V_{RSM}$	$V_{RRM}, V_{DRM}$	$I_{RMS} = 29 \text{ A A (full conduction)}$ $(T_s = 85^\circ\text{C})$	
$V$	$V$	$SK 25 WT 08$	
900	800	$SK 25 WT 12$	
1300	1200	$SK 25 WT 16$	
1700	1600		
Symbol	Conditions	Values	Units
$I_{RMS}$	$W1C ; \sin. 180^\circ ; T_s = 100^\circ\text{C}$ $W1C ; \sin. 180^\circ ; T_s = 85^\circ\text{C}$	20 29	A A
$I_{TSM}$	$T_{vj} = 25^\circ\text{C} ; 10 \text{ ms}$ $T_{vj} = 125^\circ\text{C} ; 10 \text{ ms}$	320 280	A A
$i^2t$	$T_{vj} = 25^\circ\text{C} ; 8,3\dots10 \text{ ms}$ $T_{vj} = 125^\circ\text{C} ; 8,3\dots10 \text{ ms}$	510 390	$\text{A}^2\text{s}$ $\text{A}^2\text{s}$
$V_T$	$T_{vj} = 25^\circ\text{C}, I_T = 75 \text{ A}$	max. 2,45	V
$V_{T(TO)}$	$T_{vj} = 125^\circ\text{C}$	max. 1,1	V
$r_T$	$T_{vj} = 125^\circ\text{C}$	max. 20	$\text{m}\Omega$
$I_{DD}, I_{RD}$	$T_{vj} = 125^\circ\text{C}, V_{RD}=V_{RRM}$	max. 8	mA
$t_{gd}$	$T_{vj} = 25^\circ\text{C}, I_G = 1 \text{ A}; di_G/dt = 1 \text{ A}/\mu\text{s}$	1	$\mu\text{s}$
$t_{gr}$	$V_D = 0,67 * V_{DRM}$	1	$\mu\text{s}$
$(dv/dt)_{cr}$	$T_{vj} = 125^\circ\text{C}$	1000	$\text{V}/\mu\text{s}$
$(di/dt)_{cr}$	$T_{vj} = 125^\circ\text{C}; f= 50\dots60 \text{ Hz}$	50	$\text{A}/\mu\text{s}$
$t_q$	$T_{vj} = 125^\circ\text{C}; \text{typ.}$	80	$\mu\text{s}$
$I_H$	$T_{vj} = 25^\circ\text{C}; \text{typ. / max.}$	80 / 150	mA
$I_L$	$T_{vj} = 25^\circ\text{C}; R_G = 33 \Omega; \text{typ. / max.}$	150 / 300	mA
$V_{GT}$	$T_{vj} = 25^\circ\text{C}; \text{d.c.}$	min. 2	V
$I_{GT}$	$T_{vj} = 25^\circ\text{C}; \text{d.c.}$	min. 100	mA
$V_{GD}$	$T_{vj} = 125^\circ\text{C}; \text{d.c.}$	max. 0,25	V
$I_{GD}$	$T_{vj} = 125^\circ\text{C}; \text{d.c.}$	max. 3	mA
$R_{th(j-s)}$	cont. per thyristor sin 180° per thyristor	1,7 1,78	K/W K/W
$R_{th(j-s)}$	cont. per W1C sin 180° per W1C	0,85 0,89	K/W K/W
$T_{vj}$		-40 ... +125	°C
$T_{stg}$		-40 ... +125	°C
$T_{solder}$	terminals, 10s	260	°C
$V_{isol}$	a. c. 50 Hz; r.m.s.; 1 s / 1 min.	3000 / 2500	V~
$M_s$	Mounting torque to heatsink	2,5	Nm
$M_t$			Nm
$a$		19	$\text{m}/\text{s}^2$
$m$			g
Case	SEMITOP® 2	T 37	

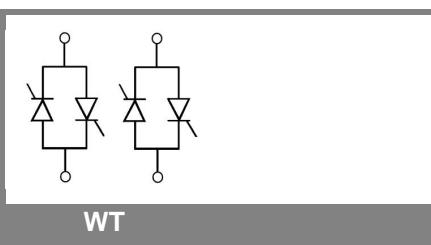

# SK 25 WT

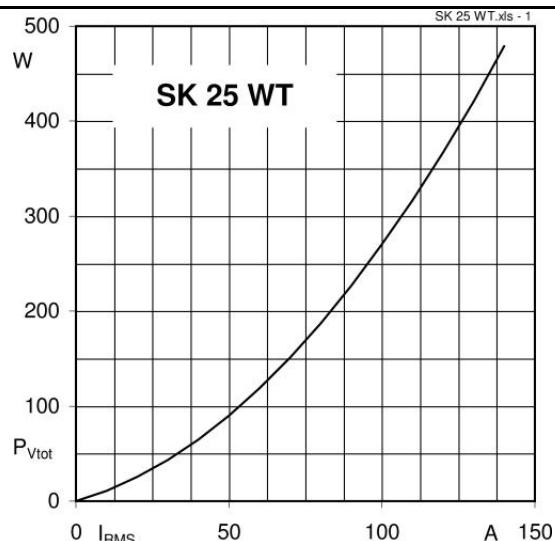


Fig. 1 Power dissipation per phase vs. r.m.s. current

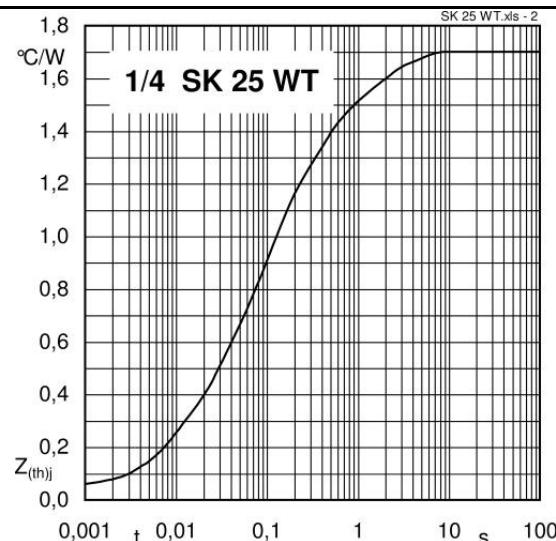


Fig. 2 Transient thermal impedance vs. time

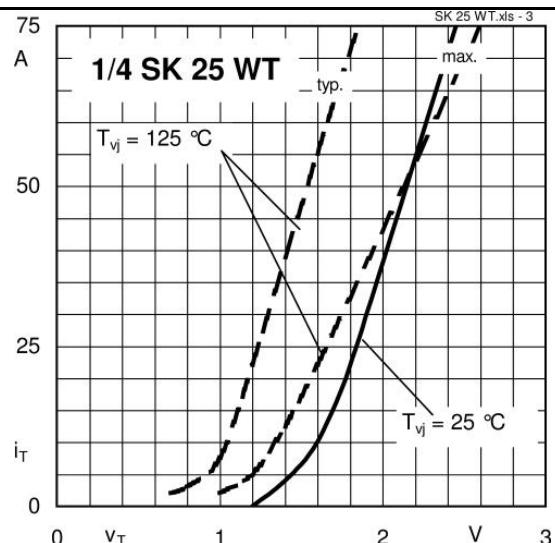


Fig. 3 On-state characteristics

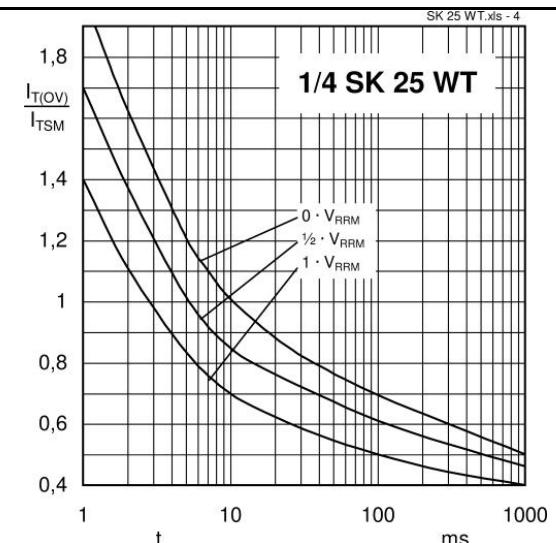


Fig. 4 Surge overload current vs. time


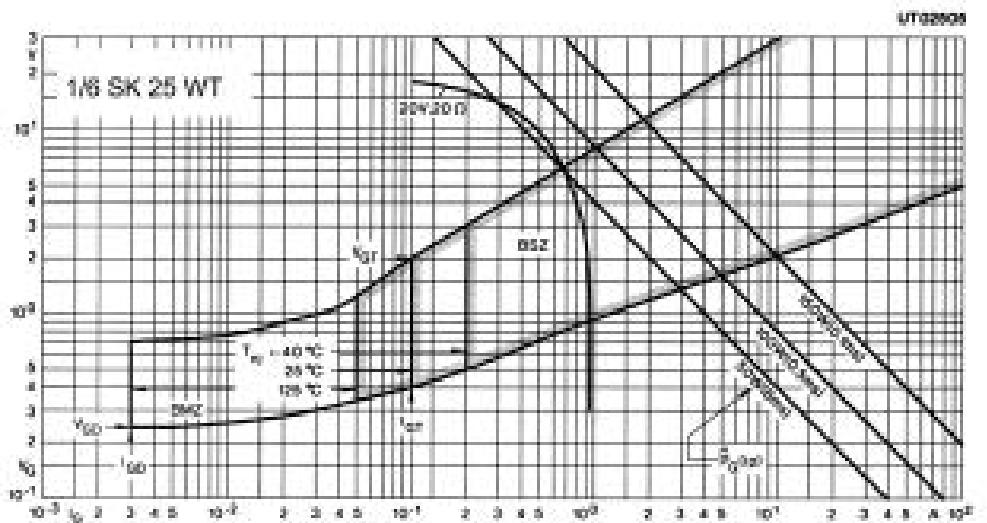


Fig. 5 Gate trigger characteristics

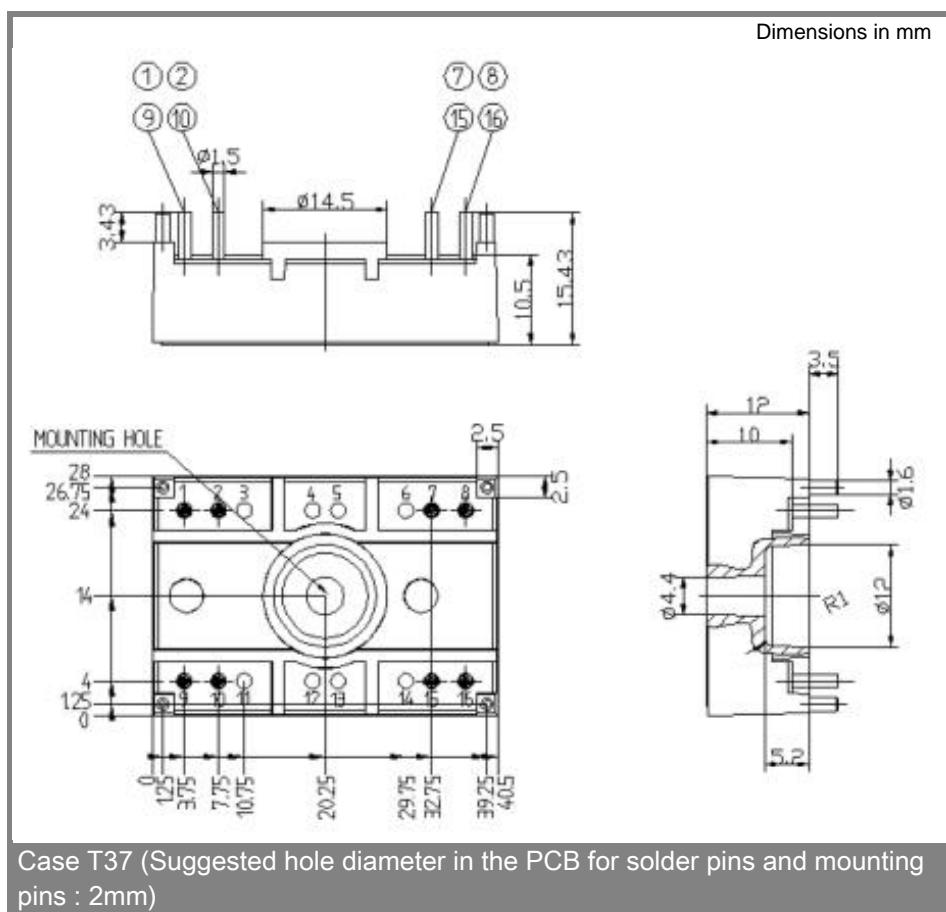

Case T37 (Suggested hole diameter in the PCB for solder pins and mounting pins : 2mm)

\* The specifications of our components may not be considered as an assurance of component characteristics. Components have to be tested for the respective application. Adjustments may be necessary. The use of SEMIKRON products in life support appliances and systems is subject to prior specification and written approval by SEMIKRON. We therefore strongly recommend prior consultation of our personal.

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for [semikron manufacturer:](#)***

Other Similar products are found below :

[SKD 60/12](#) [SKKT 162/12 E](#) [SKKT 42B12 E](#) [SKKT 92B12E](#) [SKM 200GAR125D](#) [SKM200GB12T4](#) [SKCH 40/16](#) [SKKT 92/18E](#) [SKYPER 32 R](#) [SKKH 27/16E](#) [SKKD 380/16 BI25/12](#) [SKD 110/08](#) [SKD 62/12](#) [SKIIP25AC126V1 M20](#) [SKIIP 36NAB126V1 M20](#) [SKKD 162/20H4 SKKD 380/08](#) [SKKH 72/20E H4](#) [SKKT 250/12E](#) [SKN71/02](#) [SKN 100/12](#) [SKN 100/14](#) [SKR 100/08](#) [SKIIP 24AC12T4V1 M20](#) [SKIIP 28AHB16V1 M20](#) [SKIIP 28ANB16V2 M20](#) [SKIIP 35NAB126V10 M20](#) [SKKH 570/16E](#) [SKKE 380/16](#) [SKR 130/14](#) [SKR 130/18](#) [SKKD 26/14](#) [SKM 400GAL12E4](#) [SKPC100Z-440](#) [SK 25 UT 12](#) [SKR70/04](#) [SKD35/16](#) [SKKT 42/08E](#) [SKCH 40/08](#) [SKD 62/18](#) [SKD 82/08](#) [SKIIP 23NAB126V1 M20](#) [SKKQ 1200/14E](#) [SKR 60F12](#) [SKR 100/04](#) [SKR 100/12](#) [SKIIP 37AC12T4V1 M20](#) [SKD 60/16](#) [SKD 62/08](#)