
# SK 3



### **Axial Lead Diode**

### **Rectifier Diode**

SK 3

I <sub>FAV</sub>	sin. 180; L = 10 mm;	T <sub>r</sub> = 85 (100) °C	3,3 (2,7)	А	
Symbol	Conditions		Values	Units	
1600	1600	SK 3/16			
1400	1400	SK 3/14			
1200	1200	SK 3/12			
1000	1000	SK 3/10			
V	V	I <sub>FAV</sub> = 3 A (sin. 180; T <sub>r</sub> = 90 °C)			
V <sub>RSM</sub>	V <sub>RRM</sub>	I <sub>FRMS</sub> = 6,7 A (maximum value for continuous operation)			

#### Features

- Reverse voltages up to 1600 V
- Taped for automatic insertion
- Available with formed leads on request
- Plastic material used carries Underwriter Laboratories flammability classification 94V-0

### **Typical Applications\***

All-purpose rectifier diodes

Symbol	Conditions	values	Units
I <sub>FAV</sub>	sin. 180; L = 10 mm; T <sub>r</sub> = 85 (100) °C	3,3 (2,7)	А
I <sub>FSM</sub>	T <sub>vi</sub> = 25 °C; 10 ms	180	Α
	T <sub>vi</sub> = 150 °C; 10 ms	150	А
i²t	T <sub>vj</sub> = 25 °C; 8,3 10 ms	162	A²s
	T <sub>vj</sub> = 150 °C; 8,3 10 ms	112,5	A²s
V <sub>F</sub>	T <sub>vi</sub> = 25 °C; I <sub>F</sub> = 10 A	max. 1,2	V
V <sub>(TO)</sub>	T <sub>vi</sub> = 150 °C	max. 0,85	V
r <sub>T</sub>	T <sub>vi</sub> = 150 °C	max. 30	mΩ
I <sub>RD</sub>	T <sub>vj</sub> = 150 °C; V <sub>RD</sub> = V <sub>RRM</sub>	max. 0,6	mA
Q <sub>rr</sub>	T <sub>vj</sub> = 150 °C; - di <sub>F</sub> /dt = 10 A/μs; I <sub>F</sub> = 10A	25	μC
R <sub>th(j-r)</sub>	L = 10 mm	18	K/W
R <sub>th(j-a)</sub>	PCB 50 x 50 mm	60	K/W
T <sub>vi</sub>		- 40 + 150	°C
T <sub>stg</sub>		- 40 + 150	°C
T <sub>sold</sub>	max. 10 s; L > 9mm	250	°C
V <sub>isol</sub>		-	٧~
а		5 * 9,81	m/s²
m	approx.	1	g
Case	1500 diodes per reel	E 34	






mm


01-04-2004 SCT


L


Fig. 14 Thermal resistance vs. lead length


R<sub>th(j-r)</sub>

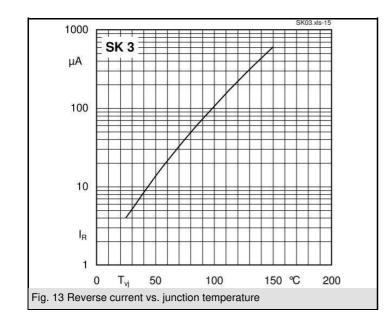


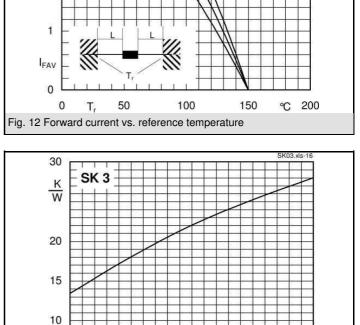

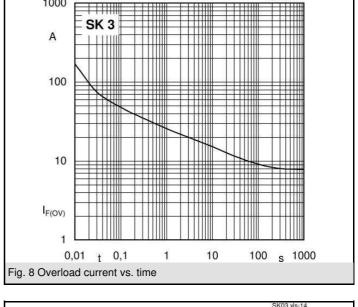


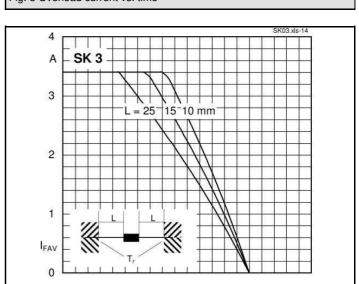

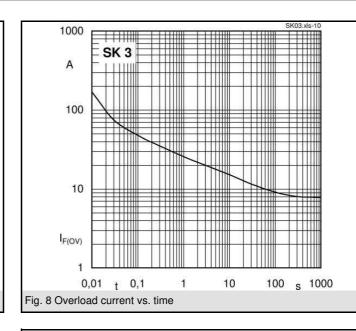

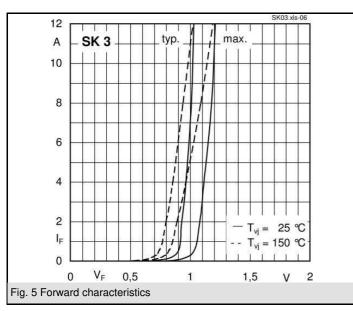

## SK 3

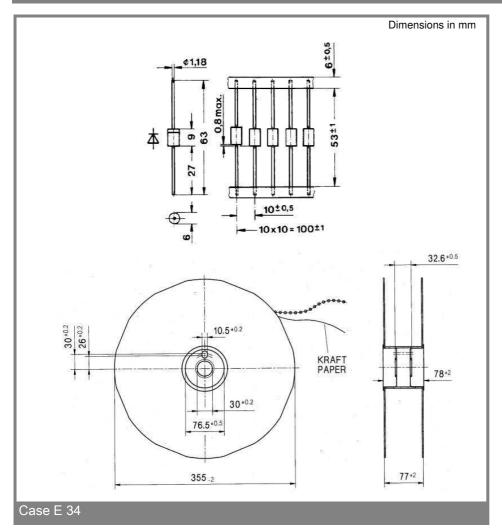

\* The specifications of our components may not be considered as an assurance of component characteristics. Components have to be tested for the respective application. Adjustments may be necessary. The use of SEMIKRON products in life support appliances and systems is subject to prior specification and written approval by SEMIKRON. We therefore strongly recommend prior consultation of our personal.

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Diodes - General Purpose, Power, Switching category:

Click to view products by Semikron manufacturer:

Other Similar products are found below :

RD0306T-H BAV17-TR BAV19-TR 1N3611 NTE156A NTE571 NTE574 NTE5804 NTE5806 NTE6244 1SS181-TP 1SS193,LF 1SS400CST2RA SDAA13 SHN2D02FUTW1TIG LS4151GS08 1N4449 1N456A 1N4934-E3/73 1N914B 1N914BTR BAW56DWQ-7-F BAW75-TAP MM230L-CAA IDW40E65D1 JAN1N3600 LL4151-GS18 053684A SMMSD4148T3G 707803H NSVDAN222T1G SP000010217 CDSZC01100-HF BAV199E6433HTMA1 BAV70M3T5G SMBT2001T1G NTE5801 NTE5800 NTE5808 NTE6240 NTE6248 BAS28-7 BAW56HDW-13 BAS28 TR VS-HFA04SD60STR-M3 NSVM1MA152WKT1G BAV99TQ-13-F BAS21DWA-7 P600K NTE178MP