


Features

- 320 Watts peak pulse power (t_P = 8/20µs)
- SOT-23 package
- Protects one bidirectional or two unidirectional lines
- Fast response time,typically < 1 ns
- Excellent clamping voltage
- Low leakage current
- IEC 61000-4-2 ±30kV (Air) ESD protection
- IEC 61000-4-2 ±30kV (Contact) ESD protection
- IEC 61000-4-4 40A (5/50ns) EFT protection
- RoHS compliant

Applications

SOT-23



Schematic Diagram

Servers, Notebooks, and Desktop Pcs

Portable Electronics

- Set-Top Box
- Communication Systems

Absolute Maximum Ratings

(T_A=25°C, Unless otherwise specified.)

Cellular Handsets and Accessories

Control & Monitoring Systems

Rating	Symbols	Value	Units
Peak Pulse Power (t _P =8/20µS)	P _{PP}	320	W
Peak Pulse Current (tp=8/20µS)	IPP	20	А
Operating Temperature	TJ	-55 to +150	°C
Storage temperature	T _{STG}	-50 to +150	°C


Electrical Characteristics

Parameter	Symbols	Conditions	Min Typ		Max	Units
Reverse stand-off Voltage	V _{RWM}				5	V
Reverse Breakdown Voltage	V_{BR}	I _T =1mA	6		7.4	V
Reverse Leakage Current	I _R	V _{RWM} =5V,T=25℃			1	μA
Clamping Voltage	Vc	I _{PP} =10Α,T _P =8/20μS			12	V
Clamping Voltage	Vc	I _{PP} =20A ,T _P =8/20μS			16	V
Junction Capacitance	CJ	V _R =0V,f=1MHz		70		pF

SES5VT23-3U



Typical Characteristic Curves

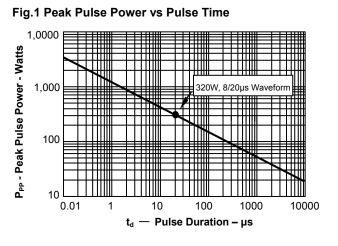






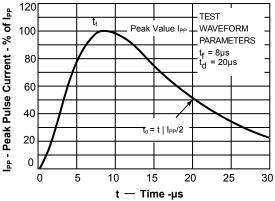



Fig.3 Power Derating Curve

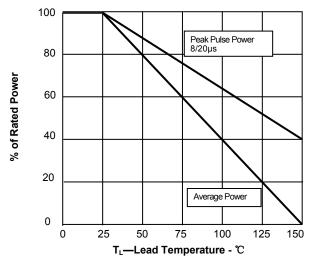




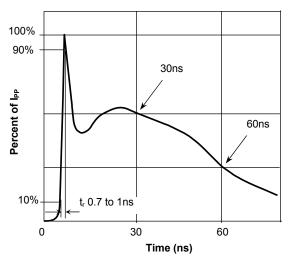

Product Dimensions

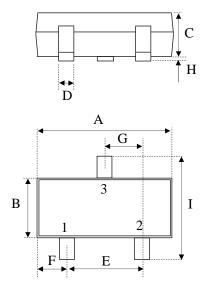




Dim	millmeters		
DIII	min	max	
А	2.80	3.04	
В	1.20	1.40	
С	0.89	1.11	
D	0.37	0.50	
Е	1.78	2.04	
F	0.45	0.60	
G	0.89	1.02	
Н	0.013	0.100	
Ι	2.10	2.50	
J	0.085	0.177	
Κ	0°	10°	
L	0.45	0.60	
L1	0.30	0.60	




PAD Dimensions




Dim	millmeters		
0	0.85		
М	0.95		
Ν	2.00		


Package Information

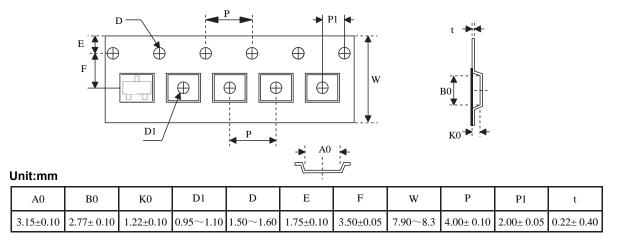

Part Number System

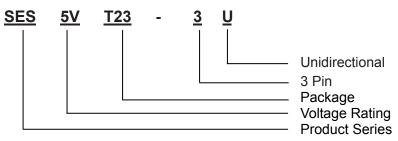

Marking





Order Information

Device	Package	Net Weight	Carrier	Quantity	HSF Status
SES5VT23-3U	SOT-23	0.0090g	Tape & Reel	3000pcs	RoHS compliant

Revision history

Date	Revision	Description of changes
12-November-2012	A0	First issue

CAUTION / WARNING

• Information in this document is believed to be accurate and reliable. However, SEMITEL does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information.

• Users should independently evaluate the suitability of and test each product selected for their own applications, and SEMITEL assumes no liability whatsoever relating to the choice, selection or use of the SEMITEL products and services described herein.

• SEMITEL reserves the right to change or update, without notice, any information contained in this publication; to change, without notice, the design, construction, processing, or specification of any product; and to discontinue or limit production or distribution of any product.

Information in this document supersedes and replaces all information previously supplied.

• Products are not designed, authorized or warranted to be suitable for use in medical, military, aircraft, space or life support equipment, nor in applications where failure or malfunction of an SEMITEL product can reasonably be expected to result in personal injury, death or severe property or environmental damage. SEMITEL accepts no liability for inclusion and/or use of SEMITEL products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

• This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from national authorities.

• Resale of SEMITEL products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by SEMITEL for the SEMITEL product or service described herein and shall not create or extend in any manner whatsoever, any liability of SEMITEL.

• SEMITEL expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. SEMITEL only obligations are those in the SEMITEL Standard Terms and Conditions of Sale and in no case will SEMITEL be liable for any incidental, indirect, or consequential damages arising from the sale, resale, use, or misuse of its products.

Specifications are subject to change without notice

© Copyright 2005, Semitel Electronics

Semitel Laber you do . ® is a registered trademark of Semitel Electronics All rights reserved

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for ESD Suppressors / TVS Diodes category:

Click to view products by Semitel manufacturer:

Other Similar products are found below :

60KS200C D18V0L1B2LP-7B D5V0F4U5P5-7 DESD5V0U1BB-7 NTE4902 P4KE27CA P6KE11CA P6KE39CA-TP P6KE8.2A SA110CA SA60CA SA64CA SMBJ12CATR SMBJ33CATR SMBJ8.0A ESD101-B1-02ELS E6327 ESD105-B1-02EL E6327 ESD112-B1-02EL E6327 ESD119B1W01005E6327XTSA1 ESD5V0L1B02VH6327XTSA1 ESD7451N2T5G 19180-510 CPDT-5V0USP-HF 3.0SMCJ33CA-F 3.0SMCJ36A-F HSPC16701B02TP D3V3Q1B2DLP3-7 D55V0M1B2WS-7 DESD5V0U1BL-7B DRTR5V0U4SL-7 SCM1293A-04SO ESD200-B1-CSP0201 E6327 SM12-7 SMF8.0A-TP SMLJ45CA-TP SMQA1000T1G CEN955 W/DATA 82350120560 VESD12A1A-HD1-GS08 CPDUR5V0R-HF CPDQC5V0U-HF CPDQC5V0USP-HF CPDQC5V0-HF IP4042CX5/LF,135 D1213A-01LP4-7B D1213A-02WL-7 1SMB33CAT3G-XYZ MMAD1108/TR13 5KP100A 5KP15A