

**POWER DISCRETES**
**Description**

Quick reference data

$$V_R = 200V - 1000V$$

$$I_F = 1.0A$$

$$t_{rr} = 2\mu S$$

$$V_F = 1.2V$$

**Features**

- ◆ 1 Amp 55°C/no heat sink
- ◆ Monolithic non-cavity construction
- ◆ Fused metal oxide hermetic seal
- ◆ Superior thermal shock resistance
- ◆ Low thermal impedance
- ◆ Low reverse leakage
- ◆ PIV to 1000 volts

These products can be supplied as JAN, JANTX or JANTXV per MIL-S-19500/286

**Electrical Specifications**

Electrical specifications: All temperatures are local ambient, 25°C unless otherwise specified.

Device Types	Reverse Voltage		Forward Current (1)	Reverse Current (Max)		Instantaneous Forward Voltage	Repetitive Surge Current	1 Cycle Surge Current tp = 8.3ms	Reverse Recovery Time (2)		Typical Thermal Impedance (3)	
	V <sub>RWM</sub>	V <sub>RRM</sub>		Free Air 55°C	I <sub>R</sub>				V <sub>F</sub> @ I <sub>F</sub> = 1.0A <sub>dc</sub>	I <sub>FRM</sub>	I <sub>FSM</sub>	T <sub>rr</sub>
	V	V	A		25°C	100°C	Vdc	A (pk)				A (pk)
1N4245	200	200	1.0	1.0	25	1.2	10	30	2	1	7	38
1N4246	400	400	1.0	1.0	25	1.2	10	30	2	1	7	38
1N4247	600	600	1.0	1.0	25	1.2	10	30	2	1	7	38
1N4248	800	800	1.0	1.0	25	1.2	10	30	2	1	7	38
1N4249	1000	1000	1.0	1.0	25	1.2	10	30	2	1	7	38

Notes:

- (1) The 1.0 amp rating @ 55°C requires no heat sinking, special mounting, or forced air across the body of the device.
- (2) Recovery conditions: 0.5 Amp forward current to -1.0 Amp reverse current. Recovery time measured when rectifier recovers to -.25 Amp.

Storage temperature: -65°C to +175°C.

## POWER DISCRETES


### Ordering Information

Part Number	Description
1N4245	Axial leaded hermetically sealed <sup>(1)</sup>
1N4246	
1N4247	
1N4248	
1N4249	

Note:

(1) Available in bulk or tape and reel packaging. Please consult factory for quantities.

### Outline Drawing

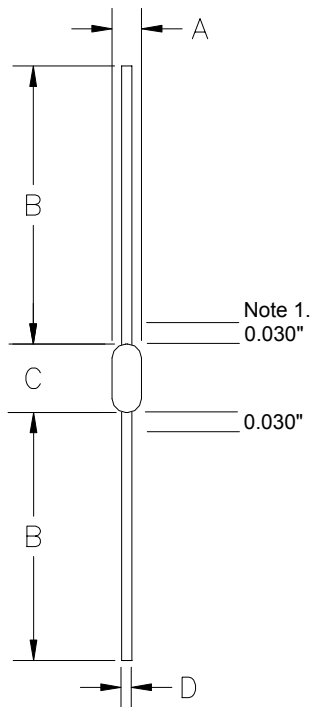

DIM <sup>N</sup>	Dimensions				Note
	Inches		Millimeters		
	MIN	MAX	MIN	MAX	
A	.065	.110	1.65	2.79	-
B	1.00	1.25	25.4	31.7	-
C	.140	.165	3.56	4.19	-
D	.027	.031	.686	.786	-

Note:

1. Lead diameter not controlled in this area.

### Contact Information

Semtech Corporation  
Power Discrettes Products Division  
200 Flynn Road, Camarillo, CA 93012  
Phone: (805)498-2111 FAX (805)498-3804

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Rectifiers](#) category:*

*Click to view products by [Semtech](#) manufacturer:*

Other Similar products are found below :

[70HFR40](#) [RL252-TP](#) [150KR30A](#) [1N5397](#) [NTE5841](#) [NTE6038](#) [SCF5000](#) [1N4002G](#) [1N4005-TR](#) [JANS1N6640US](#) [VS-80-7161](#) [481235F](#)  
[RRE02VS6SGTR](#) [067907F](#) [MS306](#) [70HF40](#) [T85HFL60S02](#) [US2JFL-TP](#) [A1N5404G-G](#) [CRS04\(T5L,TEMQ\)](#) [ACGRA4007-HF](#)  
[ACGRB207-HF](#) [CLH03\(TE16L,Q\)](#) [ACGRC307-HF](#) [ACEFC304-HF](#) [NTE6356](#) [NTE6359](#) [NTE6002](#) [NTE6023](#) [NTE6039](#) [NTE6077](#)  
[85HFR60](#) [40HFR60](#) [1N1186RA](#) [70HF120](#) [85HFR80](#) [D126A45C](#) [SCF7500](#) [D251N08B](#) [SCHJ22.5K](#) [SM100](#) [SCPA2](#) [SCH10000](#) [SDHD5K](#)  
[VS-12FL100S10](#) [ACGRA4001-HF](#) [D1821SH45T PR](#) [D1251S45T](#) [NTE5990](#) [NTE6358](#)