

POWER DISCRETES
Description

Quick reference data

$$V_R = 200 - 1000 \text{ V}$$

$$I_o = 1.0 \text{ A}$$

$$t_{rr} = 150 \text{ to } 500 \text{ ns}$$

$$V_F = 1.2 \text{ V}$$

Features

- ◆ Low reverse leakage current
- ◆ Hermetically sealed in Metoxilite fused metal oxide
- ◆ Low forward voltage drop

These products are qualified to MIL-PRF-19500/359

Electrical Specifications

Electrical specifications @ $T_A = 25^\circ\text{C}$ unless otherwise specified.

Types	V_{RWM}	I_F (AV) @ 55°C		I_{FSM}	I_{FRM} @ $tp=8.3\text{ms}$	T_{RR}	V_F @ I_F		I_R @ V_{RWM}		C_J @ 5V 1MHz	T_{STG}	$R\theta jL$	
		-pcb mid	L = 3/8"						25°C	100°C				
	V(pk)	A	A	A	A	ns	V	A	μA	μA	pF	$^\circ\text{C}$	C/W $^\circ\text{C}$	C/W $^\circ\text{C}$
1N4942	200	1.0	2.0	25	6.0	150	1.2	1.0	0.5	25	27	-65 to +175	3	7
1N4944	400	1.0	2.0	25	6.0	150	1.2	1.0	0.5	25	27	-65 to +175	3	7
1N4946	600	1.0	2.0	25	6.0	250	1.2	1.0	0.5	25	27	-65 to +175	3	7
1N4947	800	1.0	2.0	25	6.0	250	1.2	1.0	0.5	25	18	-65 to +175	3	7
1N4948	1000	1.0	2.0	25	6.0	500	1.2	1.0	0.5	25	18	-65 to +175	3	7

POWER DISCRETES


Ordering Information

Part Number	Description
1N4942 1N4944 1N4946 1N4947 1N4948	Axial leaded hermetically sealed ⁽¹⁾

Note:

(1) Available in bulk or tape and reel packaging. Please consult factory for quantities.

Outline Drawing

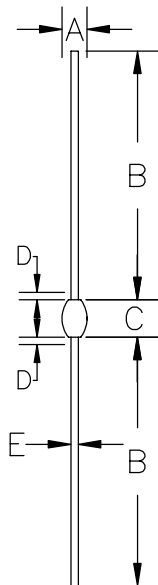

G2

DIM ^N	DIMENSIONS				NOTE
	MM		INCHES		
	MIN	MAX	MIN	MAX	
A	1.6	2.8	.065	.110	—
B	25.4	33.0	1.00	1.30	—
C	3.5	4.2	.140	.165	—
D	—	.80	—	.030	1
E	.66	.84	.026	.033	—

NOTE:

1. LEAD DIAMETER UNCONTROLLED OVER THIS REGION.

Contact Information

Semtech Corporation
Power Discrettes Products Division
200 Flynn Road, Camarillo, CA 93012
Phone: (805)498-2111 FAX (805)498-3804

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Rectifiers](#) category:

Click to view products by [Semtech](#) manufacturer:

Other Similar products are found below :

[70HFR40](#) [RL252-TP](#) [150KR30A](#) [1N5397](#) [NTE5841](#) [NTE6038](#) [SCF5000](#) [1N4002G](#) [1N4005-TR](#) [JANS1N6640US](#) [VS-80-7161](#) [481235F](#)
[RRE02VS6SGTR](#) [067907F](#) [MS306](#) [70HF40](#) [T85HFL60S02](#) [US2JFL-TP](#) [A1N5404G-G](#) [CRS04\(T5L,TEMQ\)](#) [ACGRA4007-HF](#)
[ACGRB207-HF](#) [CLH03\(TE16L,Q\)](#) [ACGRC307-HF](#) [ACEFC304-HF](#) [NTE6356](#) [NTE6359](#) [NTE6002](#) [NTE6023](#) [NTE6039](#) [NTE6077](#)
[85HFR60](#) [40HFR60](#) [1N1186RA](#) [70HF120](#) [85HFR80](#) [D126A45C](#) [SCF7500](#) [D251N08B](#) [SCHJ22.5K](#) [SM100](#) [SCPA2](#) [SCH10000](#) [SDHD5K](#)
[VS-12FL100S10](#) [ACGRA4001-HF](#) [D1821SH45T PR](#) [D1251S45T](#) [NTE5990](#) [NTE6358](#)