


1N914PF, 1N914APF, 1N914BPF

Silicon Epitaxial Planar Switching Diode

Features

- Lead Free
- Fast switching speed
- High reliability




Glass Case DO-35
Dimensions in mm

Absolute Maximum Ratings ($T_a = 25\text{ }^\circ\text{C}$)

Parameter	Symbol	Value	Unit
Non-Repetitive Peak Reverse Voltage	V_{RM}	100	V
Reverse Voltage	V_R	75	V
Average Rectified Forward Current 1N914PF 1N914APF / 1N914BPF	$I_{F(AV)}$	75 200	mA
Forward Continuous Current 1N914PF 1N914APF / 1N914BPF	I_{FM}	150 300	mA
Non-Repetitive Peak Forward Surge Current 1N914PF at $t = 1\text{ s}$ 1N914APF / 1N914BPF at $t = 1\text{ }\mu\text{s}$	I_{FSM}	1 4	A
Power Dissipation	P_{tot}	500	mW
Operating and Storage Temperature Range	T_j, T_{stg}	- 65 to + 175	$^\circ\text{C}$

Thermal Characteristics


Parameter	Symbol	Max.	Unit
Thermal Resistance from Junction to Ambient	$R_{\theta JA}$	300	$^\circ\text{C/W}$



1N914PF, 1N914APF, 1N914BPF






Characteristics at $T_a = 25\text{ }^\circ\text{C}$

Parameter	Symbol	Min.	Max.	Unit	
Forward Voltage at $I_F = 5\text{ mA}$ at $I_F = 100\text{ mA}$ at $I_F = 10\text{ mA}$ at $I_F = 20\text{ mA}$	1N914BPF 1N914BPF 1N914PF 1N914APF	V_F	0.62 - - -	0.72 1 1 1	V
Reverse Current at $V_R = 20\text{ V}$ at $V_R = 75\text{ V}$ at $V_R = 20\text{ V}$, $T_J = 150\text{ }^\circ\text{C}$	I_R	- - -	25 5 50	nA μA μA	
Diode Capacitance at $V_R = 0$, $f = 1\text{ MHz}$	C_j	-	4	pF	
Reverse Recovery Time at $I_F = 10\text{ mA}$, $I_{rr} = 1\text{ mA}$, $V_R = 6\text{ V}$, $R_L = 100\text{ }\Omega$	t_{rr}	-	4	ns	



1N914PF, 1N914APF, 1N914BPF

Electrical Characteristics Curves

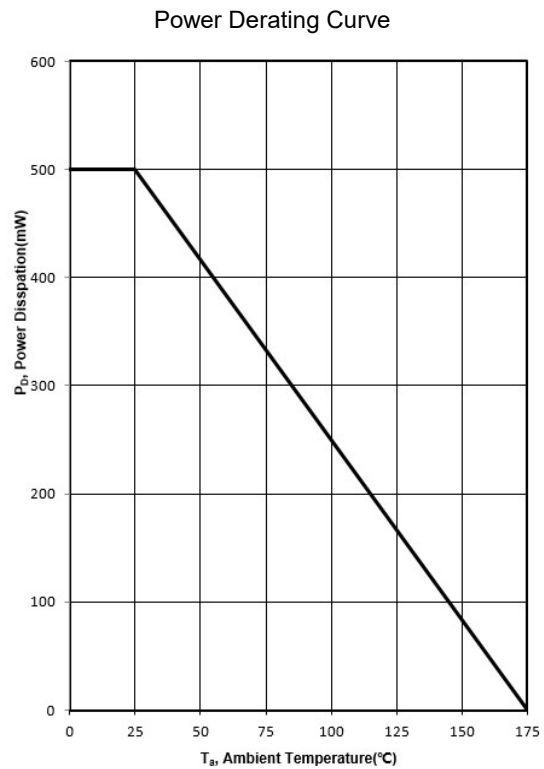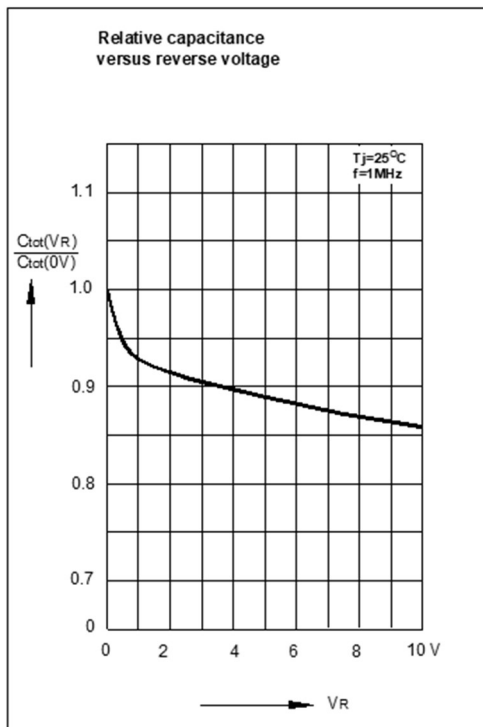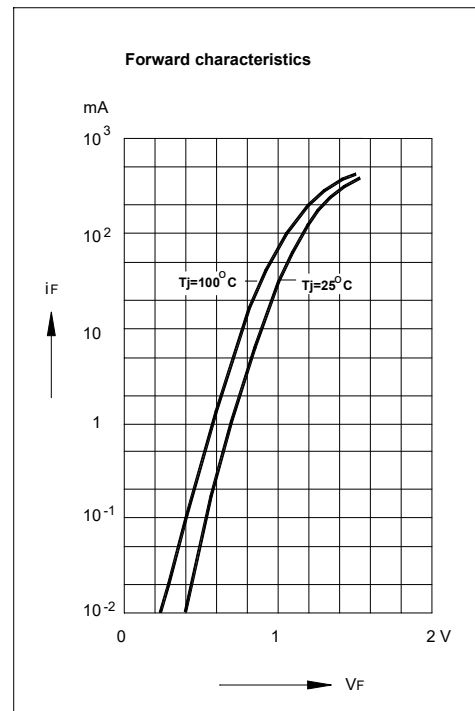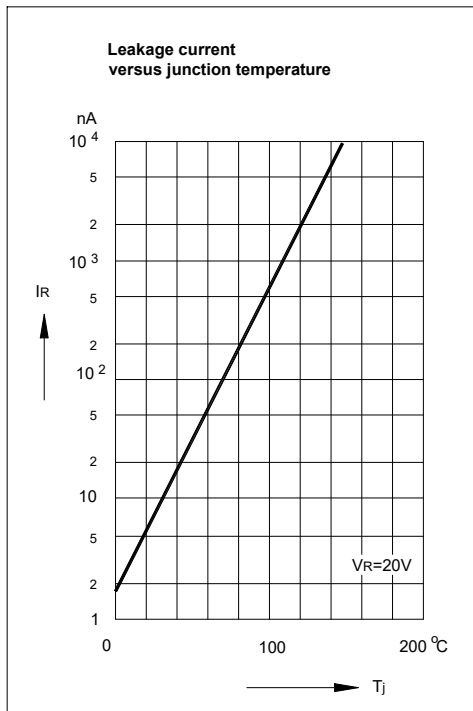

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Diodes - General Purpose, Power, Switching category:](#)

Click to view products by [Semtech manufacturer:](#)

Other Similar products are found below :

[MCL4151-TR3](#) [MMBD3004S-13-F](#) [RD0306T-H](#) [1N3611](#) [NTE156A](#) [NTE574](#) [NTE6244](#) [1SS193,LF](#) [1SS400CST2RA](#) [SDAA13](#)
[SHN2D02FUTW1T1G](#) [LS4151GS08](#) [1N4449](#) [1N456A](#) [1N4934-E3/73](#) [1N914BTR](#) [D291S45T](#) [BAV300-TR](#) [BAW56DWQ-7-F](#) [BAW75-](#)
[TAP](#) [MM230L-CAA](#) [IDW40E65D1](#) [JAN1N3600](#) [JAN1N4454UR-1](#) [LL4151-GS18](#) [SMMSD4148T3G](#) [BYW95B/A52A](#) [NSVDAN222T1G](#)
[CDSZC01100-HF](#) [LL4150-M-08](#) [1N4454-TR](#) [BAV70HDW-7](#) [BAS28-7](#) [JANTX1N6640](#) [BAW56HDW-13](#) [BAS28 TR](#) [VS-](#)
[HFA04SD60STR-M3](#) [NSVM1MA152WKT1G](#) [1SS388-TP](#) [RGP30D-E3/73](#) [VS-8EWF02S-M3](#) [BAV99TQ-13-F](#) [BAV99HDW-13](#)
[MMDB30-E28X](#) [IDP20C65D2XKSA1](#) [LS4148](#) [IDV15E65D2](#) [NSVM1MA152WAT1G](#) [HN4D02JU\(TE85L,F\)](#) [MMD820-C12](#)