

6A05 THRU 6A10

GENERAL PURPOSE PLASTIC SILICON RECTIFIERS

Reverse Voltage – 50 to 1000 V


Forward Current – 6 A

Features

- High surge current capability

Mechanical Data

- Case: Molded plastic, R-6
- Epoxy: UL 94V-0 rate flame retardant
- Lead: Axial leads, solderable per MIL-STD-202, method 208 guaranteed
- Polarity: Color band denotes cathode end
- Mounting Position: Any

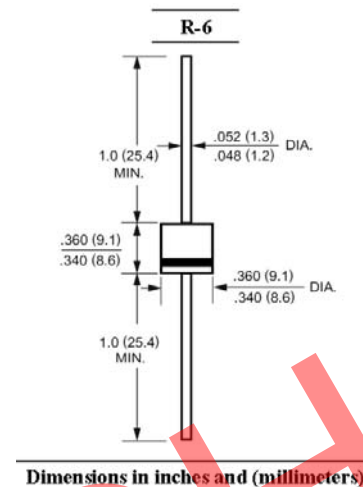


Maximum Ratings and Electrical Characteristics

Ratings at 25 °C ambient temperature unless otherwise specified. Single phase, half-wave, 60 Hz, resistive or inductive load, for capacitive load, derate current by 20%.

Parameter	Symbols	6A05	6A1	6A2	6A4	6A5	6A6	6A8	6A10	Units
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	50	100	200	400	500	600	800	1000	V
Maximum RMS Voltage	V_{RMS}	35	70	140	280	350	420	560	700	V
Maximum DC Blocking Voltage	V_{DC}	50	100	200	400	500	600	800	1000	V
Maximum Average Forward Rectified Current 0.375" (9.5 mm) Lead Length at $T_A = 60^\circ\text{C}$	$I_{F(AV)}$	6								A
Peak Forward Surge Current 8.3 ms Single Half Sine-Wave Superimposed on Rated Load (JEDEC Method)	I_{FSM}	400								A
Maximum Forward Voltage at 6 A	V_F	1.1								V
Maximum Reverse Current at Rated DC Blocking Voltage $T_A = 25^\circ\text{C}$ $T_A = 100^\circ\text{C}$	I_R	10 1000								μA
Typical Junction Capacitance ¹⁾	C_J	150								pF
Typical Thermal Resistance ²⁾	$R_{\theta JA}$	10								$^\circ\text{C/W}$
Operating Junction Temperature Range	T_J	- 55 to + 150								$^\circ\text{C}$
Storage Temperature Range	T_{Stg}	- 55 to + 150								$^\circ\text{C}$

¹⁾ Measured at 1 MHz and applied reverse voltage of 4 V D.C.

²⁾ Thermal resistance from junction to ambient 0.375" (9.5 mm) lead length P.C.B mounted with 1.1 X 1.1" (30 X 30 mm) copper pads.









SEMTECH ELECTRONICS LTD.
Subsidiary of Sino-Tech International (BVI) Limited



Dated : 18/04/2007 H

6A05 THRU 6A10

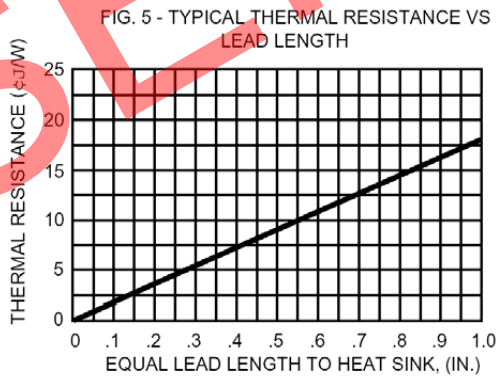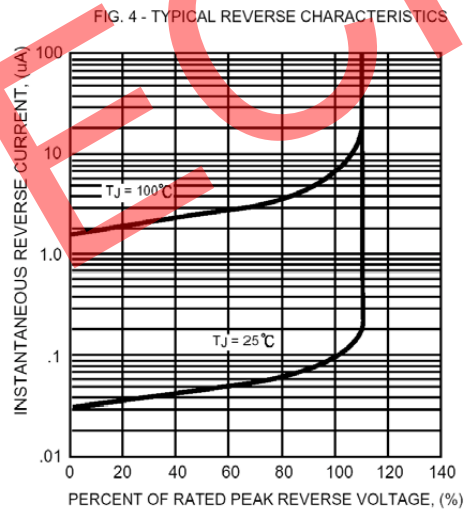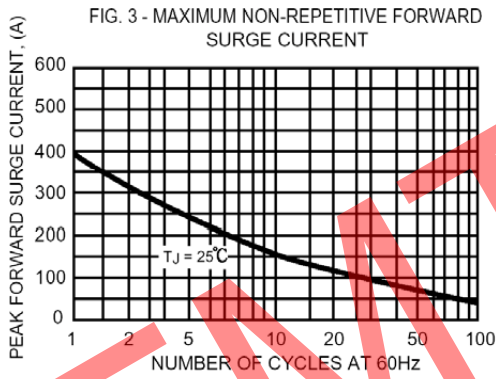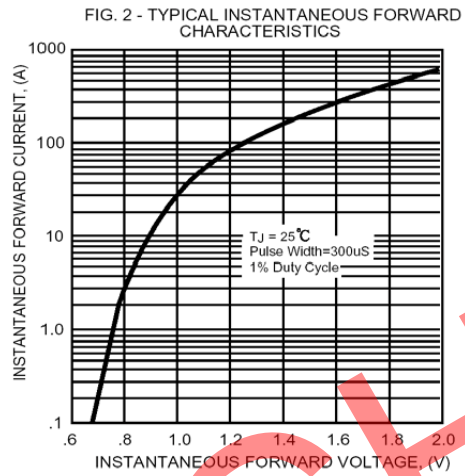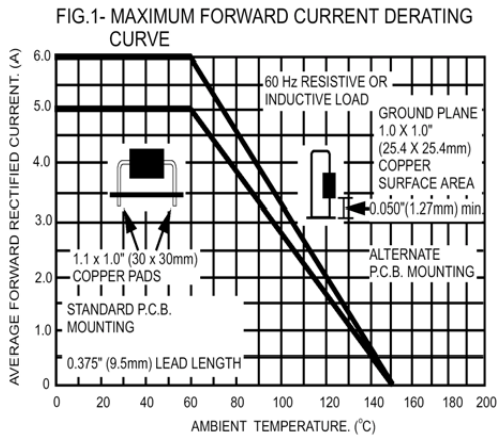

SEMTECH ELECTRONICS LTD.
Subsidiary of Sino-Tech International (BVI) Limited



Dated : 18/04/2007 H

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Diodes - General Purpose, Power, Switching category:](#)

Click to view products by [Semtech manufacturer:](#)

Other Similar products are found below :

[MMBD3004S-13-F](#) [RD0306T-H](#) [DSE010-TR-E](#) [BAV17-TR](#) [BAV19-TR](#) [1N3611](#) [NTE156A](#) [NTE574](#) [NTE6244](#) [1SS181-TP](#) [1SS193,LF](#)
[1SS400CST2RA](#) [SDAA13](#) [SHN2D02FUTW1T1G](#) [LS4151GS08](#) [1N4449](#) [1N456A](#) [1N4934-E3/73](#) [1N914B](#) [1N914BTR](#) [1SS226-TP](#)
[RFUH20TB3S](#) [D291S45T](#) [BAV300-TR](#) [BAW56DWQ-7-F](#) [BAW75-TAP](#) [MM230L-CAA](#) [IDW40E65D1](#) [JAN1N3600](#) [LL4151-GS18](#)
[053684A](#) [SMMSD4148T3G](#) [707803H](#) [NSVDAN222T1G](#) [CDSZC01100-HF](#) [LL4150-M-08](#) [BAV199E6433HTMA1](#) [BAS28-7](#)
[BAW56HDW-13](#) [BAS28 TR](#) [VS-HFA04SD60STR-M3](#) [NSVM1MA152WKT1G](#) [RGP30D-E3/73](#) [BAV99TQ-13-F](#) [BAS21DWA-7](#) [NTE6250](#)
[NTE582-4](#) [NTE582-6](#) [MMDB30-E28X](#) [VS-HFA04SD60SL-M3](#)