


BCX56U

NPN Silicon Epitaxial Planar Transistor

Medium Power Transistor



1.Base 2.Collector 3.Emitter
SOT-89 Plastic Package

Absolute Maximum Ratings ($T_a = 25^\circ\text{C}$)


Parameter	Symbol	Value	Unit
Collector Base Voltage	V_{CBO}	100	V
Collector Emitter Voltage	V_{CEO}	80	V
Emitter Base Voltage	V_{EBO}	5	V
Collector Current	I_C	1	A
Peak Collector Current	I_{CM}	1.5	A
Total Power Dissipation	P_{tot}	0.5 ¹⁾ 1.3 ²⁾	W
Junction Temperature	T_j	150	$^\circ\text{C}$
Storage Temperature Range	T_{stg}	- 65 to + 150	$^\circ\text{C}$

¹⁾ Device mounted on an FR4 Printed-Circuit Board(PCB), single-sided copper, tin-plated and standard footprint.

²⁾ Device mounted on an FR4 PCB, single-sided copper, tin-plated, mounting pad for collector 6 cm²

Characteristics at $T_a = 25^\circ\text{C}$

Parameter	Symbol	Min.	Typ.	Max.	Unit
DC Current Gain at $V_{CE} = 2\text{ V}$, $I_C = 5\text{ mA}$ at $V_{CE} = 2\text{ V}$, $I_C = 150\text{ mA}$ at $V_{CE} = 2\text{ V}$, $I_C = 500\text{ mA}$	h_{FE}	40	-	-	-
	h_{FE}	63	-	160	-
	h_{FE}	100	-	250	-
	h_{FE}	25	-	-	-
Collector Base Cutoff Current at $V_{CB} = 30\text{ V}$	I_{CBO}	-	-	100	nA
Emitter Base Cutoff Current at $V_{EB} = 5\text{ V}$	I_{EBO}	-	-	100	nA
Collector Base Breakdown Voltage at $I_C = 100\ \mu\text{A}$	$V_{(BR)CBO}$	100	-	-	V
Collector Emitter Breakdown Voltage at $I_C = 1\text{ mA}$	$V_{(BR)CEO}$	80	-	-	V
Emitter Base Breakdown Voltage at $I_E = 100\ \mu\text{A}$	$V_{(BR)EBO}$	5	-	-	V
Collector Emitter Saturation Voltage at $I_C = 500\text{ mA}$, $I_B = 50\text{ mA}$	$V_{CE(sat)}$	-	-	0.5	V
Base Emitter Voltage at $V_{CE} = 2\text{ V}$, $I_C = 500\text{ mA}$	V_{BE}	-	-	1	V
Transition Frequency at $V_{CE} = 5\text{ V}$, $I_C = 50\text{ mA}$, $f = 100\text{ MHz}$	f_T	100	-	-	MHz
Collector Capacitance at $V_{CB} = 10\text{ V}$, $f = 1\text{ MHz}$	C_c	-	6	-	pF



SEMTECH ELECTRONICS LTD.



ISO 9001 : 2008
Certificate No. 160713000



ISO 14001 : 2004
Certificate No. 7116



ISO 9001 : 2008
Certificate No. 50713410




BS OHSAS 18001 : 2007
Certificate No. 7116




IECQ QC 080000
Certificate No. PFC-HSPM-1485-1

BCX56U


Static Characteristics

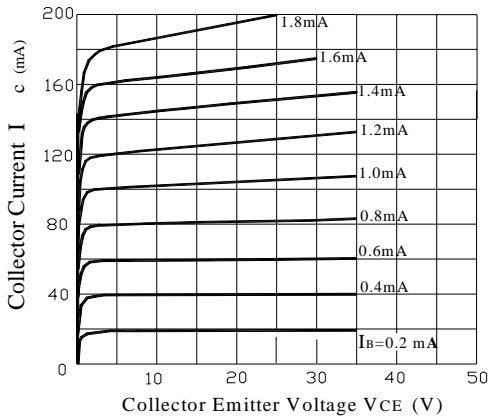


DC Current Gain

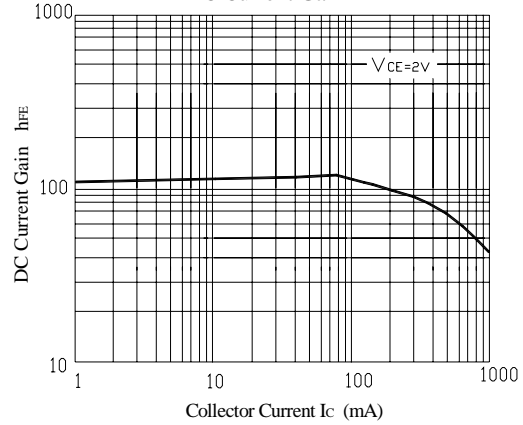



Base Emitter Saturation Voltage
Collector Emitter Saturation Voltage

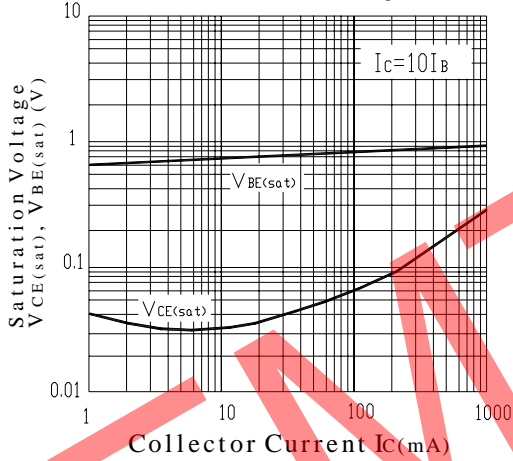

Base Emitter On Voltage

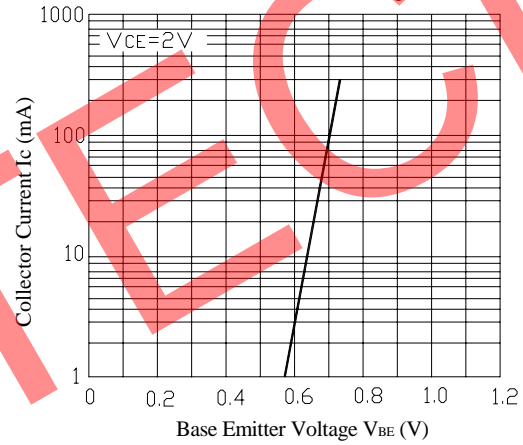


Collector Output Capacitance

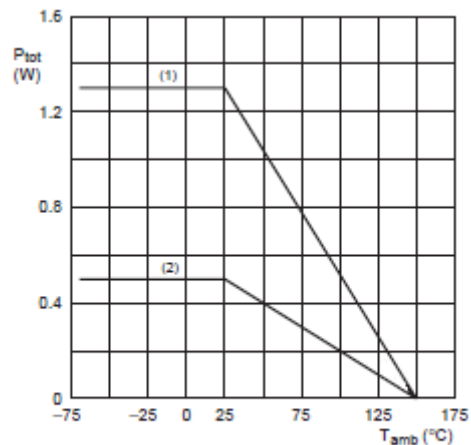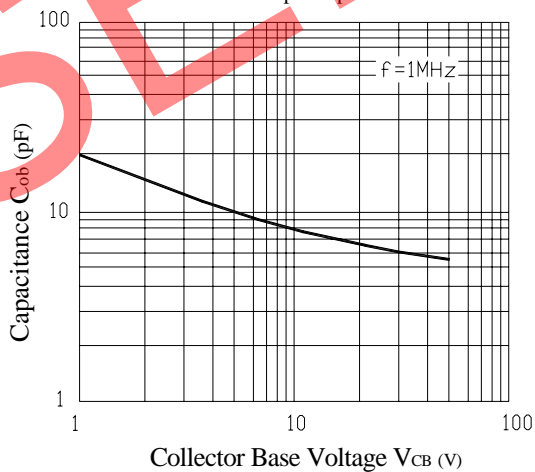

- (1) FR4 PCB, mounting pad for collector 8 cm²
- (2) FR4 PCB, standard footprint

Power derating curves




SEMTECH ELECTRONICS LTD.




ISO/TS 16949:2009 Certificate No. 160713000 | ISO 14001:2004 Certificate No. 7116 | ISO 9001:2008 Certificate No. 50719410 | BS-OHSAS 18001:2007 Certificate No. 7116 | IECQ QC 080000 Certificate No. PFC-HSP4-1481

BCX56U

SOT-89 PACKAGE OUTLINE

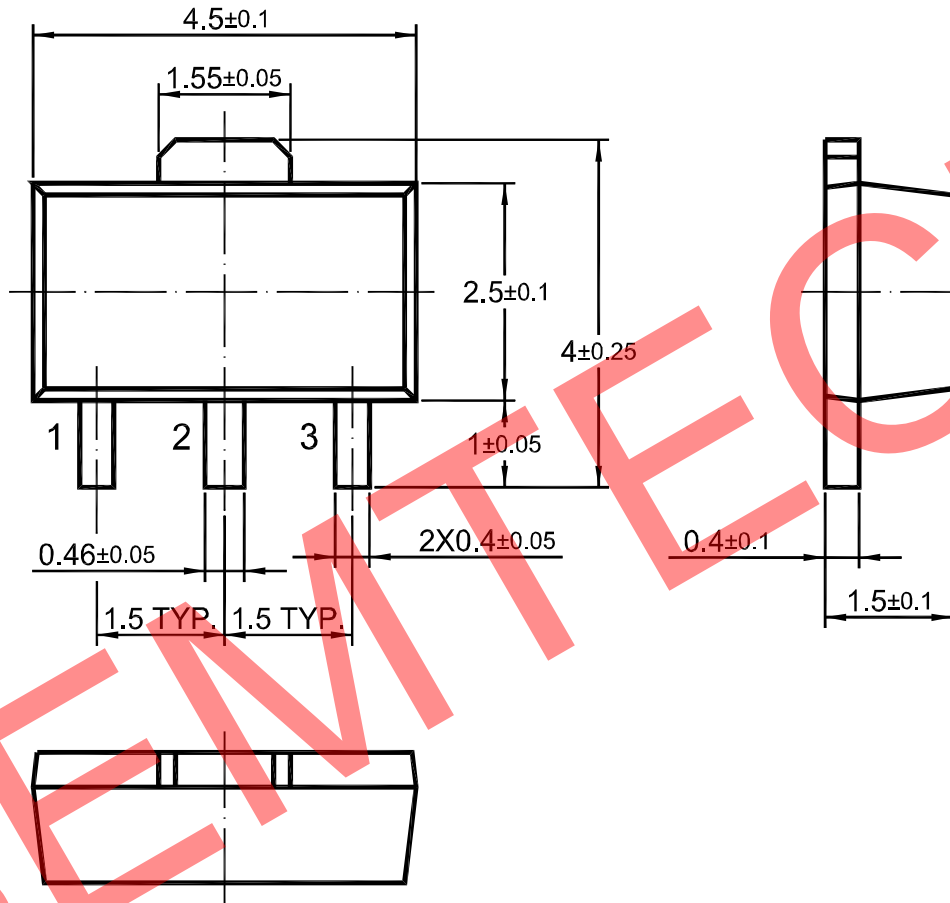

Dimensions in mm



SEMTECH ELECTRONICS LTD.



ISO 9001 : 2008
Certificate No. 50713000



ISO 14001 : 2004
Certificate No. 7116



ISO 9001 : 2008
Certificate No. 50713410



BS OHSAS 18001 : 2007
Certificate No. 7116



IECQ QC 080000
Certificate No. PFC-HSPM-1485-1

Dated: 27/12/2013 Rev: 02

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Bipolar Transistors - BJT category](#):

Click to view products by [Semtech manufacturer](#):

Other Similar products are found below :

[619691C](#) [MCH4017-TL-H](#) [MMBT-2369-TR](#) [BC546/116](#) [BC557/116](#) [BSW67A](#) [NJVMJD148T4G](#) [NTE123AP-10](#) [NTE153MCP](#) [NTE16](#)
[NTE195A](#) [NTE92](#) [C4460](#) [2N4401-A](#) [2N6728](#) [2SA1419T-TD-H](#) [2SA2126-E](#) [2SB1204S-TL-E](#) [2SC2712S-GR,LF](#) [2SC5488A-TL-H](#)
[2SD2150T100R](#) [SP000011176](#) [2N2907A](#) [2N3904-NS](#) [2N5769](#) [2SC2412KT146S](#) [2SD1816S-TL-E](#) [CPH6501-TL-E](#) [MCH4021-TL-E](#)
[MJE340](#) [US6T6TR](#) [NJL0281DG](#) [732314D](#) [CPH3121-TL-E](#) [CPH6021-TL-H](#) [873787E](#) [IMZ2AT108](#) [UMX21NTR](#) [MCH6102-TL-E](#)
[NJL0302DG](#) [2N3583](#) [30A02MH-TL-E](#) [NSV40301MZ4T1G](#) [NTE13](#) [NTE26](#) [NTE282](#) [NTE323](#) [NTE350](#) [NTE81](#) [STX83003-AP](#)