


BZX85C

Silicon Planar Power Zener Diodes

for use in stabilizing and clipping circuits with high power rating.

The Zener voltages are graded according to the international E 24 standard. Other tolerances and higher Zener voltages are upon request.

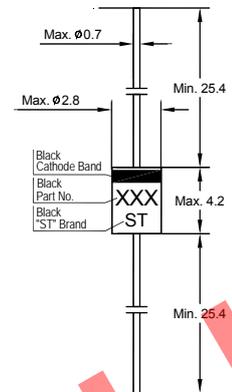

Glass Case DO-41
Dimensions in mm

Absolute Maximum Ratings ($T_a = 25\text{ }^\circ\text{C}$)


| Parameter | Symbol | Value | Unit |
|---------------------------|-----------|-------------------|------------------|
| Power Dissipation | P_{tot} | 1.3 ¹⁾ | W |
| Junction Temperature | T_j | 200 | $^\circ\text{C}$ |
| Storage Temperature Range | T_{stg} | - 55 to + 200 | $^\circ\text{C}$ |

¹⁾ Valid provided that leads at a distance of 8 mm from case are kept at ambient temperature.

Characteristics at $T_a = 25\text{ }^\circ\text{C}$

| Parameter | Symbol | Max. | Unit |
|---|-----------|-------------------|------|
| Thermal Resistance Junction to Ambient Air | R_{thA} | 130 ¹⁾ | K/W |
| Forward Voltage at $I_F = 200\text{ mA}$ | V_F | 1.2 | V |

¹⁾ Valid provided that leads at a distance of 8 mm from case are kept at ambient temperature.



SEMTECH ELECTRONICS LTD.
Subsidiary of Sino-Tech International (BVI) Limited




Dated: 18/06/2012 Rev: 01

BZX85C

Characteristics at $T_a = 25\text{ }^\circ\text{C}$

| Type | Zener Voltage ¹⁾ | | | Dynamic Resistance | | | | Reverse Current | |
|-----------|-----------------------------|-------------|-------------|--------------------|-------------|-------------------|-------------|------------------------|----------|
| | V_{Znom} | V_{ZT} | at I_{ZT} | Z_{ZT} | at I_{ZT} | Z_{ZK} | at I_{ZK} | I_R | at V_R |
| | (V) | (V) | (mA) | Max. (Ω) | (mA) | Max. (Ω) | (mA) | Max. (μA) | (V) |
| BZX85C3V0 | 3 | 2.8...3.2 | 80 | 20 | 80 | 400 | 1 | 100 | 1 |
| BZX85C3V3 | 3.3 | 3.1...3.5 | 70 | 20 | 70 | 400 | 1 | 40 | 1 |
| BZX85C3V6 | 3.6 | 3.4...3.8 | 60 | 15 | 60 | 500 | 1 | 20 | 1 |
| BZX85C3V9 | 3.9 | 3.7...4.1 | 60 | 15 | 60 | 500 | 1 | 10 | 1 |
| BZX85C4V3 | 4.3 | 4...4.6 | 50 | 13 | 50 | 500 | 1 | 3 | 1 |
| BZX85C4V7 | 4.7 | 4.4...5 | 45 | 13 | 45 | 600 | 1 | 3 | 1 |
| BZX85C5V1 | 5.1 | 4.8...5.4 | 45 | 10 | 45 | 500 | 1 | 1 | 1.5 |
| BZX85C5V6 | 5.6 | 5.2...6 | 45 | 7 | 45 | 400 | 1 | 1 | 2 |
| BZX85C6V2 | 6.2 | 5.8...6.6 | 35 | 4 | 35 | 300 | 1 | 1 | 3 |
| BZX85C6V8 | 6.8 | 6.4...7.2 | 35 | 3.5 | 35 | 300 | 1 | 1 | 4 |
| BZX85C7V5 | 7.5 | 7...7.9 | 35 | 3 | 35 | 200 | 0.5 | 1 | 4.5 |
| BZX85C8V2 | 8.2 | 7.7...8.7 | 25 | 5 | 25 | 200 | 0.5 | 1 | 6.2 |
| BZX85C9V1 | 9.1 | 8.5...9.6 | 25 | 5 | 25 | 200 | 0.5 | 1 | 6.8 |
| BZX85C10 | 10 | 9.4...10.6 | 25 | 7 | 25 | 200 | 0.5 | 0.5 | 7 |
| BZX85C11 | 11 | 10.4...11.6 | 20 | 8 | 20 | 300 | 0.5 | 0.5 | 8.2 |
| BZX85C12 | 12 | 11.4...12.7 | 20 | 9 | 20 | 350 | 0.5 | 0.5 | 9.1 |
| BZX85C13 | 13 | 12.4...14.1 | 20 | 10 | 20 | 400 | 0.5 | 0.5 | 10 |
| BZX85C15 | 15 | 13.8...15.6 | 15 | 15 | 15 | 500 | 0.5 | 0.5 | 11 |
| BZX85C16 | 16 | 15.3...17.1 | 15 | 15 | 15 | 500 | 0.5 | 0.5 | 12 |
| BZX85C18 | 18 | 16.8...19.1 | 15 | 20 | 15 | 500 | 0.5 | 0.5 | 13 |
| BZX85C20 | 20 | 18.8...21.2 | 10 | 24 | 10 | 600 | 0.5 | 0.5 | 15 |
| BZX85C22 | 22 | 20.8...23.3 | 10 | 25 | 10 | 600 | 0.5 | 0.5 | 16 |
| BZX85C24 | 24 | 22.8...25.6 | 10 | 25 | 10 | 600 | 0.5 | 0.5 | 18 |
| BZX85C27 | 27 | 25.1...28.9 | 8 | 30 | 8 | 750 | 0.25 | 0.5 | 20 |
| BZX85C30 | 30 | 28...32 | 8 | 30 | 8 | 1000 | 0.25 | 0.5 | 22 |
| BZX85C33 | 33 | 31...35 | 8 | 35 | 8 | 1000 | 0.25 | 0.5 | 24 |
| BZX85C36 | 36 | 34...38 | 8 | 40 | 8 | 1000 | 0.25 | 0.5 | 27 |
| BZX85C39 | 39 | 37...41 | 6 | 50 | 6 | 1000 | 0.25 | 0.5 | 30 |
| BZX85C43 | 43 | 40...46 | 6 | 50 | 6 | 1000 | 0.25 | 0.5 | 33 |
| BZX85C47 | 47 | 44...50 | 4 | 90 | 4 | 1500 | 0.25 | 0.5 | 36 |
| BZX85C51 | 51 | 48...54 | 4 | 115 | 4 | 1500 | 0.25 | 0.5 | 39 |
| BZX85C56 | 56 | 52...60 | 4 | 120 | 4 | 2000 | 0.25 | 0.5 | 43 |
| BZX85C62 | 62 | 58...66 | 4 | 125 | 4 | 2000 | 0.25 | 0.5 | 47 |
| BZX85C68 | 68 | 64...72 | 4 | 130 | 4 | 2000 | 0.25 | 0.5 | 51 |
| BZX85C75 | 75 | 70...79 | 4 | 135 | 4 | 2000 | 0.25 | 0.5 | 56 |

¹⁾ Tested with pulses $t_p = 20\text{ ms}$.





SEMTECH ELECTRONICS LTD.
Subsidiary of Sino-Tech International (BVI) Limited




Dated: 18/06/2012 Rev: 01

BZX85C

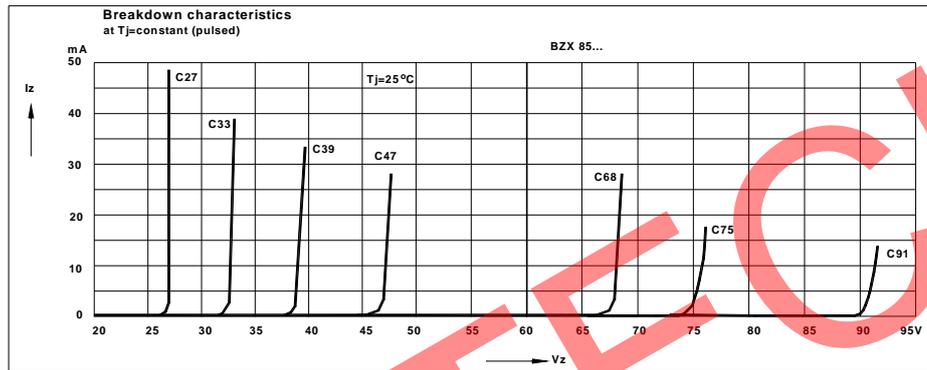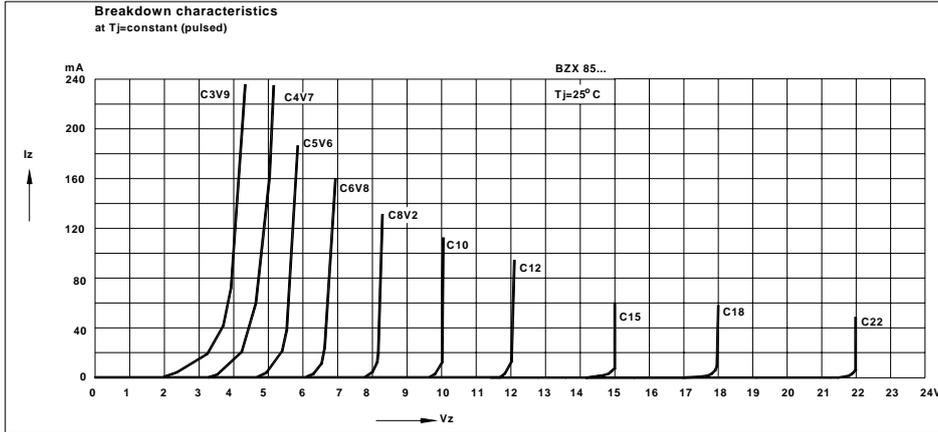


Admissible power dissipation
Versus ambient temperature
Valid provided that leads are kept at ambient
Temperature at a distance of 10 mm from case

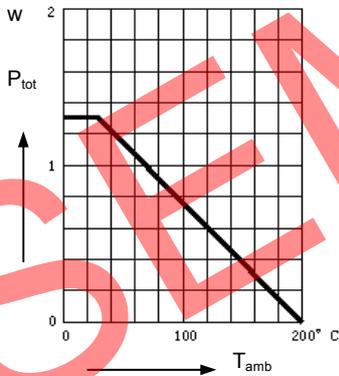

Dynamic resistance versus Zener current


Dynamic resistance versus Zener current

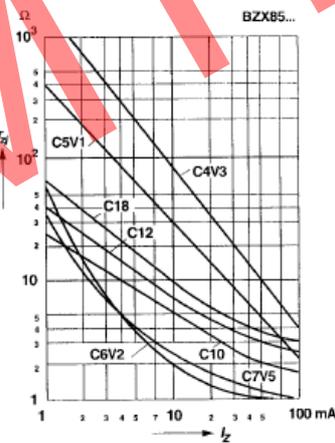





Dynamic resistance versus Zener current

Pulse thermal resistance versus pulse duration

Valid provided that leads are kept at ambient
temperature at a distance of 10 mm from case.

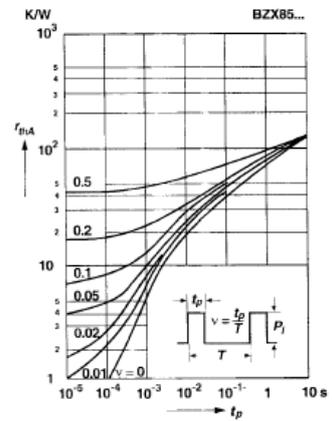

Thermal resistance versus lead length

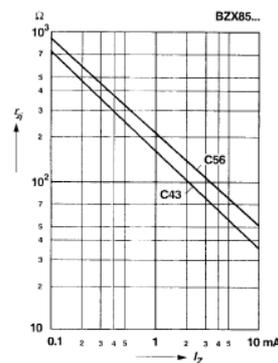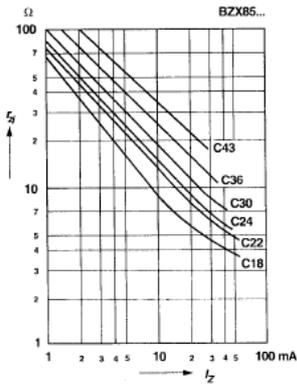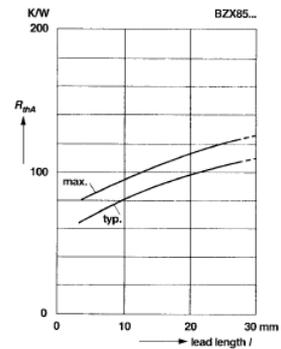

SEMTECH ELECTRONICS LTD.
Subsidiary of Sino-Tech International (BVI) Limited



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Zener Diodes](#) category:

Click to view products by [Semtech](#) manufacturer:

Other Similar products are found below :

[RKZ13B2KG#P1](#) [DL5234B](#) [EDZTE6113B](#) [1N4682](#) [1N4691](#) [1N4693](#) [1N4732A](#) [1N4736A](#) [1N4750A](#) [1N4759ARL](#) [1N5241B](#) [1N5365B](#)
[1N5369B](#) [1N747A](#) [1N959B](#) [1N964B](#) [1N966B](#) [1N968B](#) [1N972B](#) [NTE5121A](#) [NTE5147A](#) [NTE5152A](#) [NTE5155A](#) [NTE5164A](#)
[JANS1N4974US](#) [1N4692](#) [1N4700](#) [1N4702](#) [1N4704](#) [1N4711](#) [1N4714](#) [1N4737A](#) [1N4745ARL](#) [1N4752A](#) [1N4752ARL](#) [1N4760ARL](#)
[1N5221B](#) [1N5236B](#) [1N5241BTR](#) [1N5242BTR](#) [1N5350B](#) [1N5352B](#) [1N961BRR1](#) [1N964BRL](#) [RKZ5.1BKU#P6](#) [3SMAJ5946B-TP](#)
[3SMAJ5950B-TP](#) [3SMBJ5925B-TP](#) [441774C](#) [BZX84C3V9](#)