



ESD...CA Series

Transient Voltage Suppressors

for ESD Protection

Features

- Low clamping voltage
- Low leakage



1. Cathode 2. Cathode 3. Anode
TO-236 Plastic Package

Absolute Maximum Ratings ($T_a = 25^\circ\text{C}$)


Parameter	Symbol	Value	Unit
IEC61000-4-2 (ESD) Air Contact	V_{ESD}	± 15 ± 8	KV
Peak Pulse Power ($t_p = 8/20 \mu\text{s}$)	P_{pk}	300	W
Operating Junction Temperature	T_j	150	$^\circ\text{C}$
Storage Temperature Range	T_{stg}	- 55 to + 150	$^\circ\text{C}$

Characteristics at $T_a = 25^\circ\text{C}$

Type	Marking Code	Reverse Stand-off Voltage	Reverse Current	Breakdown Voltage		Clamping Voltage ¹⁾				Peak Pulse Current	Capacitance ²⁾
		V_{RWM}	I_{R} at V_{RWM}	V_{BR}	at I_{T}	V_{C}	at I_{PP}	V_{C}	at I_{PP}	I_{PP}	C_j
		Max. (V)	Max. (μA)	Min. (V)	(mA)	Max. (V)	(A)	Max. (V)	(A)	Max. (A)	Max. (pF)
ESD3V3CA	03C	3.3	125	4.5	1	7	1	9	5	18	600
ESD4V0CA	04C	4	125	5	1	8.5	1	10.5	5	17	600
ESD5V0CA	05C	5	100	6	1	9.8	1	12.5	5	17	400
ESD8V0CA	08C	8	10	8.5	1	13.4	1	15	5	15	350
ESD12CA	12C	12	1	13.3	1	19	1	28	5	12	150
ESD15CA	15C	15	1	16.7	1	24	1	35	5	10	100
ESD24CA	24C	24	1	26.7	1	43	1	60	5	5	63
ESD36CA	36C	36	1	39	1	60	1	71	3.5	3.5	65

¹⁾ $t_p = 8/20 \mu\text{s}$

²⁾ Measured at 1 MHz and applied reverse voltage of 0 V



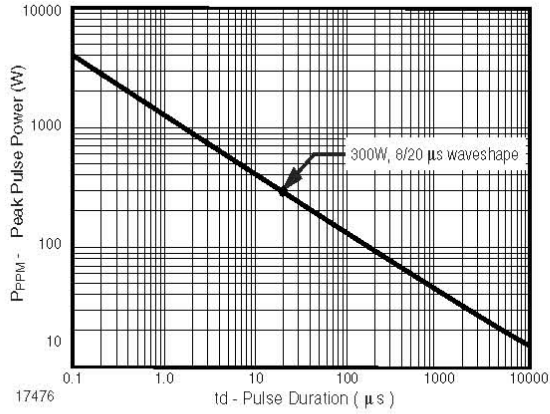


Figure 1. Non -Repetitive Peak Pulse Power vs. Pulse Time

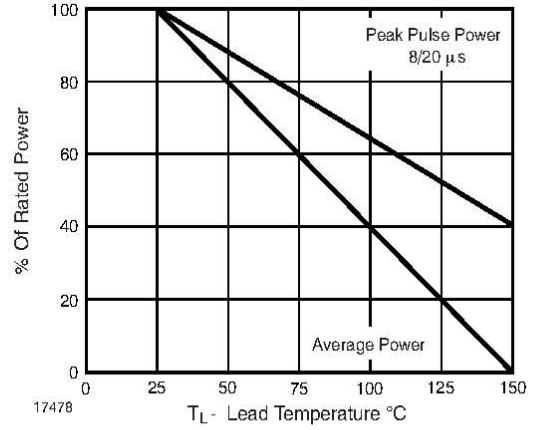


Figure 3. Power Derating


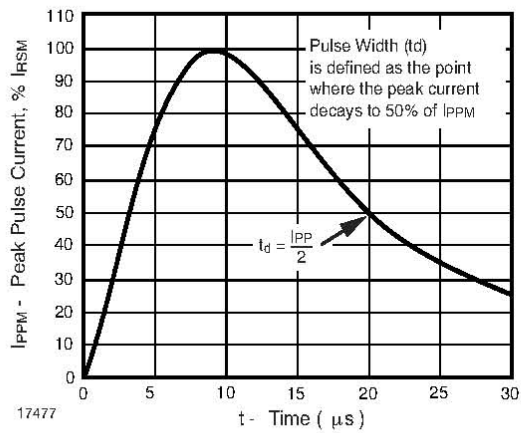


Figure 2. Pulse Waveform



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [ESD Suppressors / TVS Diodes](#) category:

Click to view products by [Semtech](#) manufacturer:

Other Similar products are found below :

[60KS200C](#) [D18V0L1B2LP-7B](#) [D5V0F4U5P5-7](#) [NTE4902](#) [P4KE27CA](#) [P6KE11CA](#) [P6KE39CA-TP](#) [P6KE8.2A](#) [JANTX1N6053A](#)
[SA110CA](#) [SA60CA](#) [SA64CA](#) [SMBJ12CATR](#) [SMBJ33CATR](#) [SMBJ8.0A](#) [ESD101-B1-02ELS E6327](#) [ESD105-B1-02EL E6327](#) [ESD112-B1-02EL E6327](#) [ESD119B1W01005E6327XTSA1](#) [ESD5V0L1B02VH6327XTSA1](#) [ESD7451N2T5G](#) [19180-510](#) [CPDT-5V0USP-HF](#)
[3.0SMCJ33CA-F](#) [3.0SMCJ36A-F](#) [HSPC16701B02TP](#) [JANTX1N6126A](#) [JANTX1N6462](#) [JANTX1N6465](#) [USB50805e3/TR7](#)
[D3V3Q1B2DLP3-7](#) [D55V0M1B2WS-7](#) [DRTR5V0U4SL-7](#) [SCM1293A-04SO](#) [ESD200-B1-CSP0201 E6327](#) [SM12-7](#) [SM1605E3/TR13](#)
[SMLJ45CA-TP](#) [CEN955 W/DATA](#) [82350120560](#) [VESD12A1A-HD1-GS08](#) [CPDUR5V0R-HF](#) [CPDQC5V0U-HF](#) [CPDQC5V0USP-HF](#)
[CPDQC5V0-HF](#) [D1213A-01LP4-7B](#) [ESD101-B1-02EL E6327](#) [824500181](#) [MMAD1108/TR13](#) [5KP100A](#)